


INSTALLATION INSTRUCTIONS

READ IMPORTANT SAFETY TIPS BEFORE PROCEEDING WITH INSTALLATION


SAFETY TIPS




Turn fixture off! (Place wall switch in off position, if fixture has built-in switch or chain pull, switch or pull chain so fixture is off.)




Next - go to the main fuse box. If your fuse box has an ON/OFF switch, simply place main power switch in OFF position.




Screw-in type fuses - unscrew the fuse or fuses that control the power to the fixture or room you are working in.

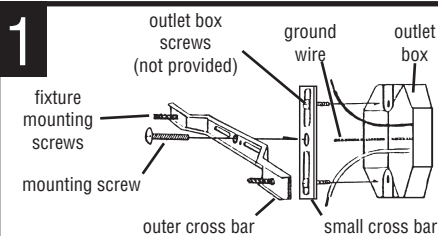


1 ATTACH small cross bar to outlet box with outlet box screws (8-32 x 1/2, screws not provided). THREAD fixture mounting screws (8-32 x 1,2 provided) into large cross bar. ATTACH large cross bar to small cross bar with mounting screw (1/4 - 20 x 3/8,1 provided).

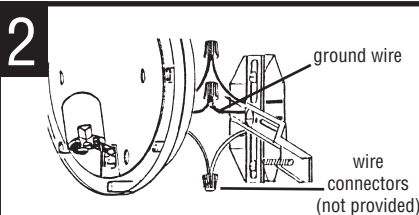

2 CONNECT THE WIRES. NOTE: Attach black fixture wire to black supply wire, white fixture wire to white supply wire. Do not mix them up. Use approved electrical tape or wire connectors (not provided). Connect bare fixture ground wire to ground wire from outlet box. NEVER CONNECT GROUND WIRE TO BLACK OR WHITE POWER SUPPLY WIRES.

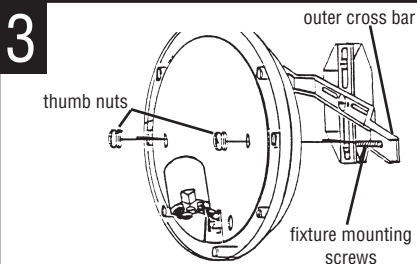


3 POSITION THE FIXTURE over the large cross bar and secure in place with the thumb nuts (2 provided). Screw bulb into socket. Be sure to use bulb with wattage no greater than specified for this fixture.

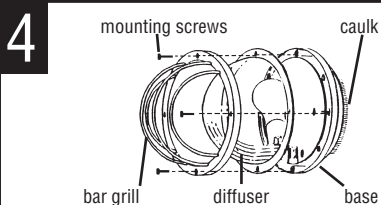


4 PLACE DIFFUSER ON FIXTURE BASE. Then place bar grill or frame over diffuser and attach to base with mounting screws (8-32 x 1/2, 4 combination head screws provided). NOTE: Outdoor wall fixture MUST be caulked with an acrylic caulk where base of fixture meets mounting surface. This provides a water tight seal when fixture is installed.

NOTE: BE SURE WIRES EXITING THE BACK OF FIXTURE ARE NOT PINCHED BETWEEN THE BACK OF FIXTURE AND CEILING OR WALL



CORRECT
WIRES **MUST** LAY
IN THIS SLOT



INCORRECT




CLEAN ONLY WITH MILD SOAP AND WATER. AVOID SPRAYING WITH CLEANSERS, INSECTICIDES, AND PESTICIDES THAT ARE PETROLEUM BASED HYDROCARBON PRODUCTS. THESE WILL DEGRADE LUMINAIRE.

INSTALLATION INSTRUCTIONS

READ IMPORTANT SAFETY TIPS BEFORE PROCEEDING WITH INSTALLATION


SAFETY TIPS




Turn fixture off! (Place wall switch in off position, if fixture has built-in switch or chain pull, switch or pull chain so fixture is off.)




Next - go to the main fuse box. If your fuse box has an ON/OFF switch, simply place main power switch in OFF position.




Screw-in type fuses - unscrew the fuse or fuses that control the power to the fixture or room you are working in.

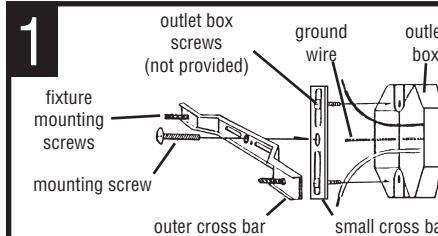


1 ATTACH small cross bar to outlet box with outlet box screws (8-32 x 1/2, screws not provided). THREAD fixture mounting screws (8-32 x 1,2 provided) into large cross bar. ATTACH large cross bar to small cross bar with mounting screw (1/4 - 20 x 3/8,1 provided).

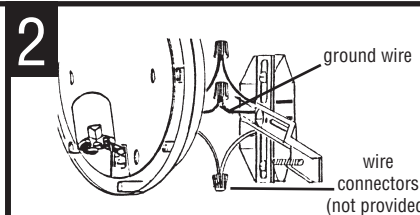

2 CONNECT THE WIRES. NOTE: Attach black fixture wire to black supply wire, white fixture wire to white supply wire. Do not mix them up. Use approved electrical tape or wire connectors (not provided). Connect bare fixture ground wire to ground wire from outlet box. NEVER CONNECT GROUND WIRE TO BLACK OR WHITE POWER SUPPLY WIRES.

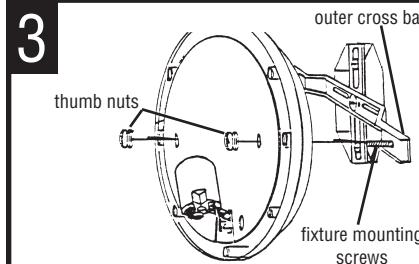


3 POSITION THE FIXTURE over the large cross bar and secure in place with the thumb nuts (2 provided). Screw bulb into socket. Be sure to use bulb with wattage no greater than specified for this fixture.

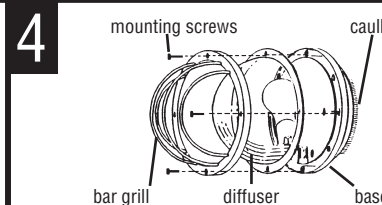


4 PLACE DIFFUSER ON FIXTURE BASE. Then place bar grill or frame over diffuser and attach to base with mounting screws (8-32 x 1/2, 4 combination head screws provided). NOTE: Outdoor wall fixture MUST be caulked with an acrylic caulk where base of fixture meets mounting surface. This provides a water tight seal when fixture is installed.

NOTE: BE SURE WIRES EXITING THE BACK OF FIXTURE ARE NOT PINCHED BETWEEN THE BACK OF FIXTURE AND CEILING OR WALL



CORRECT
WIRES **MUST** LAY
IN THIS SLOT



INCORRECT



CLEAN ONLY WITH MILD SOAP AND WATER. AVOID SPRAYING WITH CLEANSERS, INSECTICIDES, AND PESTICIDES THAT ARE PETROLEUM BASED HYDROCARBON PRODUCTS. THESE WILL DEGRADE LUMINAIRE.