

# BAJARACK WARRANTY



This Limited Warranty covers BajaRack products and all accessories for a period of 2 years from the date of purchase to the original owner of the product and does not apply once the equipment is sold or transferred to another person.

This Warranty does not cover the cost of removal of reinstallation or the product. BajaRack warrants (subject to conditions listed in this warranty) all products to be free of manufacturing defects in materials and workmanship.

## Warranty claim requirements

The claim has to be submitted during the warranty period at the place of purchase or directly at our corporate office located:



**BajaRack Adventure Equipment**  
2275 Michael Faraday Drive, Suite 6  
San Diego, CA 92154 USA  
Phone Number: 760-621-0171

On your product you will find a label with a serial number. If you remove this label, please save the serial number in a safe place. You will need it if you want to make a warranty claim in the future. Any cost incurred to transport the defective product "to and from" will be the customer's responsibility.



## Warranty resolution

Subject to BajaRack inspection of the product, the company will remedy defects in materials and/or workmanship by repairing or replacing, at BajaRack's option, the defective product without charge for parts or labor, subject to the limitations and exclusions described in this warranty. BajaRack may elect, at its option, not to repair or replace a defective product, in which case BajaRack will issue to the original retail purchaser, at BajaRack's option, either a full refund equal to the purchase price paid for the product, or a credit to be used toward the purchase of new BajaRack products or accessories.

## Limitations of Liability

BajaRack is not liable for damage caused by shipping or transport of BajaRack products. It is the responsibility of the original retail purchaser to inspect all products prior to acceptance and to notify the shipping carrier in a timely manner so that any claim for damages can be made. If timely notification to the shipping carrier by the original retail purchaser is not made regarding damage caused during the transport of the product, a claim for damages may not be possible, and all liability falls to the original retail purchaser. This warranty does not apply if accident, abuse, misuse, collision, overloading, modification, misapplication, improper installation, or improper service has damaged the Product.

BAJARACK SHALL NOT BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, INCIDENTAL, SPECIAL, EXEMPLARY, OR PUNITIVE DAMAGES OR FOR ANY OTHER DAMAGES OF ANY KIND OR NATURE [NO PERIOD.] (INCLUDING, BUT NOT LIMITED TO, LOST PROFITS, DOWN TIME OR LOSS OF USE) UNDER ANY LEGAL THEORY, EVEN IF BAJARACK WAS ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. BAJARACK'S SOLE LIABILITY IS LIMITED TO THE REMEDY SET FORTH ABOVE.

BajaRack reserves the right to change Product design without notice.



## FORD BRONCO


BR-FRBRNC2D-0

(2021-2023)

STANDARD ROOF RACK  
2 DOORS



# RACK COMPONENTS

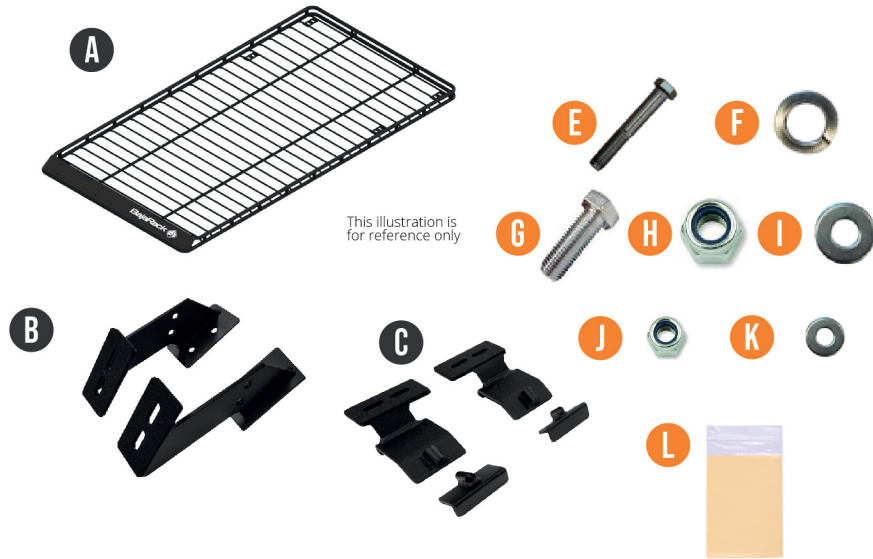

This illustration is for reference only

## What's in the box

- A) Rack (1x)
- B) Front brackets AD, AP. (2x)
- C) Back brackets BD, BP. (2x)

- D) 5/16" Bolt (2x)
- E) 5/16" Security Washer (2x)
- F) 5/16" x 3/4" Hex Cap Screw (8x)
- G) 5/16" Nylon Insert Lock Nut (8x)
- H) 5/16" OD Flat Washer (16x)
- I) 10 mm Nylon Insert Lock Nut (4x)
- J) 10 mm OD Flat Washer (4x)
- K) Grease, for use with all bolts with lock nuts (1x)

### Recommended Tools

- 1/2" wrench for installation
- Ratchet tool
- 1/2" Socket for ratchet tool
- 5/16" Allen wrench

### Tips and recommendations (please read)

- Please Install the Rack with the help of a friend.
- The load limit of your rack is 200lb please do not exceed.
- Your Rack is an accessory; it is not protection for rollovers

# INSTALLATION STEPS

**1** Take the components out of the box and lay the rack (A) upside down on a flat surface (table) the rack overhangs on the front so you can install the front brackets AD, AP, you will need bolt (F), flat washer (H), Lock Nut (G) flat washer (H), and a ratchet tool with a 1/2" socket on a 1/2" wrench.



**2** For each bracket AD (A Driver), and AP (A Passenger) insert the washer (H) onto the bolt (F), Insert bolt/washer (F, H) through the rack (A) and bracket (AD and AP). Then place another Washer (I) and then the lock nut (G) over the bolt (F) and hand tightens.



**Note:** Please use grease (L) before tightening bolts and locknuts.



**3** Assemble the back brackets BD (B Driver), and BP (B passenger) using bolt (D) and Security washer (E) and insert them through the clamp hole..



**Note:** it's recommendable to add grease (K) over the bolt before tightening the nut.



# INSTALLATION STEPS



Proceed to install the back brackets BD (B Driver), and BP (B Passenger) onto the slot of the roof of the vehicle, tilting the bracket in such a way that the bottom of the bracket enters first the slot of the roof, and the upper part rest on the top of the roof, using the 5/16" Allen Wrench hand tighten.

**4** When all mounts are in position, proceed to mount the rack (A) onto the roof of the vehicle with the help of a friend, making sure the rack will line up with the holes of the brackets.



**5** Proceed to insert 10mm OD flat washer (J) and 10 mm Nylon Insert Lock Nut (I) onto the factory bolts, where the front brackets AD (A Driver) and AP (A Passenger) rest. Using the 10mm wrench tighten, do not over torque this will damage the threads on the factory bolts.



**6** Proceed to insert bolt (F) washer (H) onto the top of the rack (A), brackets AD (A Driver), AP (A Passenger), BD (B Driver), BP (B Passenger), CD (C Driver), and CP (C passenger) on the bottom insert washer (H) and lock nut (G), using a ratchet tool, 1/2" socket, and 1/2" wrench.

Note: it's recommendable to add grease (L) over the bolt before tightening the nut. Ensure all brackets are tightened and the rack is not loose (give it a good shake)




**ENJOY**  
— YOUR NEW —  
**BAJARACK**  
ROOF RACK!

# TECHNICAL SPECIFICATIONS

## FORD BRONCO

BR-FRBRNC2D-0

Standard Basket Rack

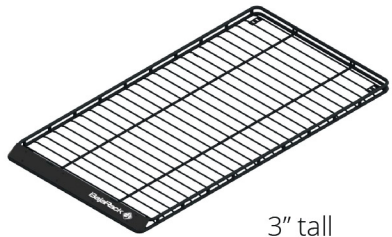

3" tall  
(76.2 mm)

48" (1219.2 mm)



81.5" (2070.1 mm)

This Rack comes as one piece and includes all mounting brackets, stainless steel hardware, and aluminum wind deflector.

**Material and Thickness:** 1" (25.4mm) and 1/2"(12.7mm) and 3/4"(19.05mm) Steel tubing

**Wind Deflector:** 0.062" (1.57mm) 5050-H32 Aluminum

**Finish:** Epoxy primer (rust inhibitor) with black powder coating

**Rack weight:** 75Lb (34.01 kg)

**Weight Capacity:** 200Lb (90.71 kg)

**Measurements:** 48" (1219.2 mm) Wide x 81.5"(2070.1 mm)

Long x 3" (76.2 mm) Tall

**Total Height (Top of roof to top of rack):** 5.25"

**Mounting method:** 4 mounting brackets

# COMPATIBLE ACCESSORIES



Fuel Can Holder



Axe & Shovel mount for  
3" height racks



Awning mount for 3" height  
racks (2 pieces)



Tent Plates



Hi-Lift mount for  
3" height racks



Light Clamp mount



Maxtrax mount for  
3" height racks



Water Can Holder



Tire mount



Yakima & Thule Accessory  
mount (2 pieces)



Yakima & Thule Accessory  
mount (4 pieces)