

Available in a range of sizes and wattages, and with dimming options, the Electra is a versatile downlight suitable for many general lighting requirements. Powder coated, high grade die-cast aluminium housing for an aesthetically pleasing look, with high-quality LED technology for colour quality characteristics which subtly complement, and enhance the space.



Mechanical

Installation	Recessed
Housing Material	Die Cast Aluminium
Lens Material	Acrylic
Ingress Protection	IP44
Luminaire Diameter	220mm
Luminaire Depth	66mm
Cut-out Diameter	200mm
Weight	1.5 kg


Electrical

Luminaire Power	35W 43W
Driver Included	Yes
Voltage Input	220-240V AC
Drive Current	800mA 1,500mA

Light Source

LED Manufacturer	Everlight SMD
LED Series	SMD2835
Beam Angle	105° 95°
Luminaire Lumens	3,388lm 3,415lm
Colour Rendering (CRI)	Ra 90
Colour Consistency	SDCM 3
Lumen Maintenance	L70 40,000 hours

Luminous Intensity Distribution Diagram (cd)

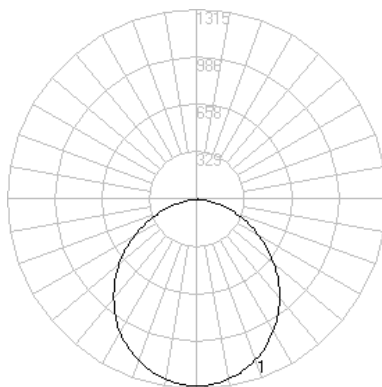

Ordering Information

Code	ELECTRA 4	CCT	Wattage	Colour	Dimming		
Example	EA-3008	-W30	-35	-W	-T		
CCT	Code	Wattage	Code	Colour	Code	Dimming	Code
2700K	W27	35W	35	White	W	Trailing Edge	T
3000K	W30	43W	43	Black	B	1-10V	A
4000K	W40			Custom	C	DALI	D

