




**UNIVERSAL STAINLESS STEEL
TRASH CHUTE DOOR, BOTTOM HINGED
SKU: HRX09**

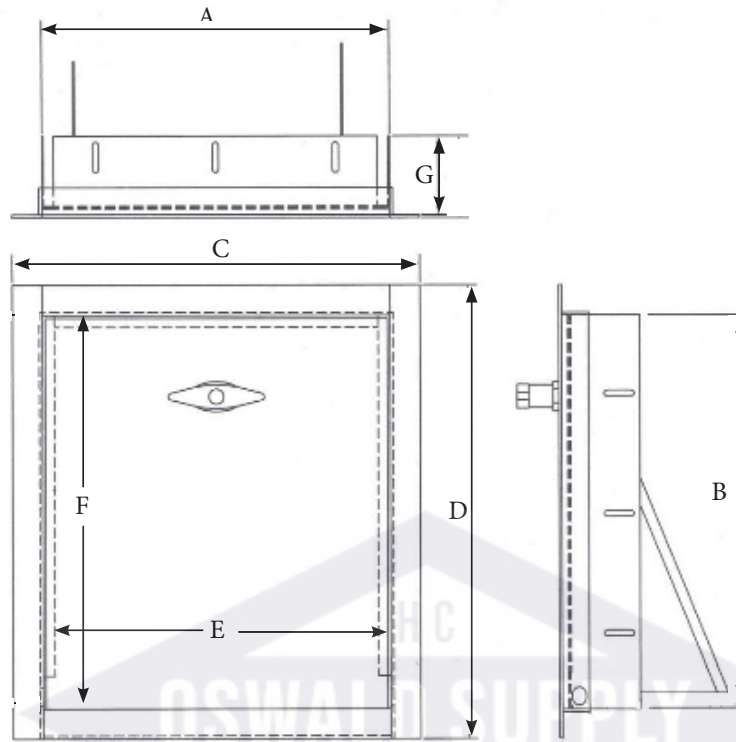

**UNIVERSAL STAINLESS STEEL TRASH CHUTE DOOR SKU: HRX09
DIMENSION CHART**

SIZE	SKU	A	B	C	D	E	F	G	Lbs.	Door/ Daylight Opening	Pitson Size/ Type	Trim (w)	Recom- mended Chute Diameter
12"x15"	HR109	11.38"	14.50"	15.50"	17.75"	11"	13.25"	3.50"	20	10"	8" NC	2"	15"
15"x18"	HR209	14.50"	17.75"	18.75"	21"	14"	16.75"	3.50"	25	16"	10" NC	2"	18", 20", 24"
15" x 18" WIDE TRIM	HR- 209WR	14.50"	17.75"	21"	23.25"	14"	16.75"	3.50"	25	16"	10" NC	3.25"	18", 20", 24"
18" x 18"	HR309	17.50"	17.75"	21.75"	20.75"	17.5"	16.25"	4.38"	25	15"	10" NO	2"	28"
20" x 20"	HR609	19.88"	19.88"	24"	22.50"	19.75"	19"	4.38"	27	15"	10" NO	2"	N/A
21" x 18"	HR409	20.75"	17.75"	24.75"	21"	20.50"	16.25"	4.38"	28	15"	10" NO	2"	30"
21" x 21"	HR809	20.75"	20.75"	24.75"	23.50"	20.50"	19"	4.38"	35	15"	10" NO	2"	N/A
24" x 24"	HR709	23.75"	23.75"	27.75"	26.50"	23.50"	22"	4.38"	38	15"	10" NO	2"	N/A

All measurements in inches with +/-0.07 tolerance

KEY FEATURES:

- Chute intake doors are Fire Rated – UL Certified, complying with building codes, "B" label Underwriter Laboratory 1 ½ Hr. rating.
- Stainless Steel 304, 20 Ga, No. 4 Finish
- Chute Replacement Door, Bottom Hinged.
- Hand operated, silent and self-closing by means of an automatic door closer/hydraulic piston.
- Positive self-latching with chrome t-handle with lock
- ADA L-Handle available
- Rubber Baffle to reduce updraft on 12 x 15 and 15 x 18
- Attached embossed trim on 12 x 15 and 15 x 18 sized doors. Anything over 15 x 18 is furnished with removable trim.
- Suitable for in-wall, Trash Chute & Linen Chute applications.



718-620-1400



info@oswaldsupply.com



725 Whitter St.
Bronx, NY 10474
www.oswaldsupply.com