


Project:	AIA#
Item:	
Location:	SIS#
Approved:	

### WTR WORKTOP REFRIGERATOR

WTR93AHC Worktop Refrigerators Hydrocarbon Series MODELS: WTR93AHC



#### **CABINET CONSTRUCTION**

- Stainless steel front, sides and doors, (galvanized back & bottom)
- Interior liner is made of corrosion resistant aluminum
- 100% Front breather
- Stainless steel top
- 4" Built-in backsplash
- Full electronic control
- Interior thermometer is standard
- Self-closing doors with 120° stay-open feature, on cam-lift hinges
- Easy door removal for service and cleaning
- Magnetic gasket attached to each door for positive seal
- Painted aluminum door handles
- 6" Casters, two (2) with brakes standard
- Two epoxy-coated steel wire shelves per section standard
- Field reversible doors
- Maintains product temperature between 36°F and 38°F

#### **REFRIGERATION SYSTEM**

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Automatic, non-electric defrost
- Epoxy coated evaporator coil



# **OPTIONS & ACCESSORIES**

- ☐ Stainless steel back and grille
- Stainless steel interior
- ☐ Right or left hinged door
- □ Locks (solid doors only)
- □ Bun rack
- ☐ Wire shelf divider
- Cutting board
- ☐ Thermometer digital or stem type dial
- ☐ 3" Casters or 6" legs
- Low profile casters
- Remote option


















MODEL	WTR93AHC
EXTERNAL DIMENSIONAL DATA	
Width Overall	93"
Depth Overall with Counter top	34"
Height Overall with 6" Casters	39 1/2"
Number of Doors	3
Depth with Door Open 90 °	57 "
Door Opening (inches)	21 5/8" x 23 5/8"
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft.)	29.7
Internal Width Overall (in)	73 7/8"
Internal Depth Overall (in)	26"
Internal Height Overall (in)	25"
Number of Shelves	6
ELECTRICAL DATA	
Full Load Amperes 115/60/1	5.0
REFRIGERATION DATA	
Horsepower	1/3
Capacity (BTU/Hr)*	2629
WEIGHT DATA	
Gross Weight (kgs)	528 lbs
Height - Crated	46 1/2"
Width - Crated	96"
Depth - Crated	37"

## **Worktop Refrigerator**

Models: WTR93AHC

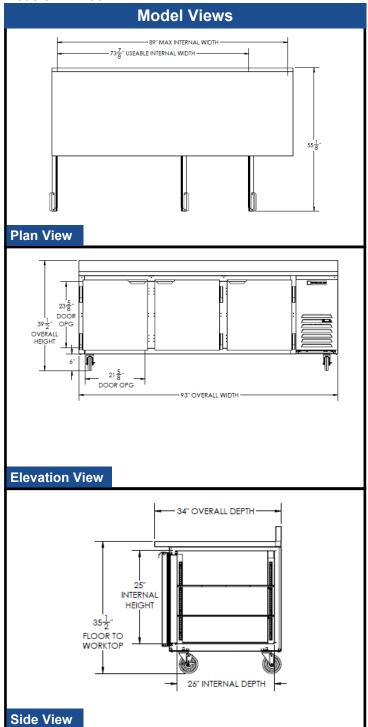

### **ELECTRICAL CONNECTION**



Units pre-wired at factory and include 8' long cord and plug set.















