



Technical data

Voltage	U	230	V
Phase		1	~
Frequency	f	50	Hz
Speed	n	930	RPM
Power consumption	P _e	520	W
Nominal current	I _{nom}	2.3	A
Maximum current	I _{max}	3.4	A
Cos φ		0.98	
Capacitor		16/400	μF/V
Service factor current		3.4	A
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CLF	
IP Class Fan		IP55	
Sound pressure level (2 m)	L _{p (meas.)}	67	dB(A)
Sound pressure level (7 m)	L _{p (calc.)}	56	dB(A)
Weight		19.3	kg
Packing dimensions		720x720x400	mm

Fan details


Impeller blades	4
Impeller type	5
Impeller system	G
Impeller material	PG

Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No
Intelligent Fan Drive	Yes

Characteristics

0 Pa 13500 m³/h
 50 Pa 11200 m³/h

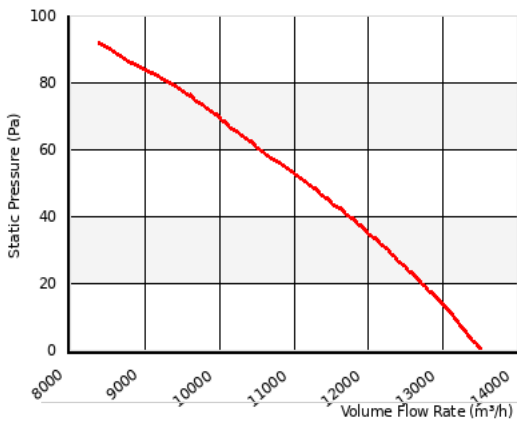


Please note: Picture may deviate from original product

Approval(s)



Wiring diagram

BA01 - 1 Phase - Standard - CCW

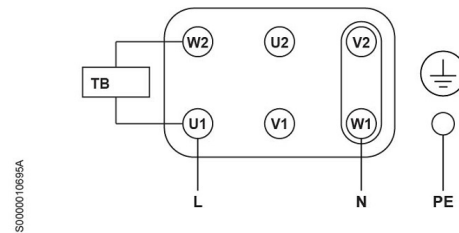

Article number: P6E71AAM11100

Tube mounting fans



Vostermans Ventilation B.V.
Venlo - The Netherlands
+31 (0)77 389 32 32
ventilation@vostermans.com

Vostermans Ventilation Inc.
Bloomington, IL - U.S.A.
+1 309 827 9798
ventilation@vostermansusa.com

Vostermans Ventilation Ltd. Co.
Shanghai - China
+86 21 5290 2889/2899
ventilation@vostermanschina.com

Vostermans Ventilation Sdn. Bhd.
Tmn Klang Jaya - Malaysia
+60 (0)33324 3638
ventilation@vostermansasia.com