



POSI-CHLOR®

SALT WATER CHLORINATOR



FEATURES

- Adjustable chlorine production by high-efficiency switched mode power supply
- Automatic switch-off owing to lack of water flow
- Automatic switch-off owing to the accumulation of gas in the cell, with automatic restart once the water flow is restored
- Automatic voltage adjustment depending on the concentration of salt and the temperature, ensuring continuous efficient chlorine production
- Automatic and adjustable rever polarity cleaning cycle
- Battery backed-up time clock with automatic restart
- Mineral salt compatible
- Available in 3 configurations: Basic - with convenient adjustment of chlorine output, pH - with an automatic probe-free adjustment of pH, and Advanced - with probes and full automatic control of pH and Chlorine (ORP)

SMART TECHNOLOGY FOR HEALTHIER, CLEANER POOL WATER

Keep your pool water clear and inviting with electrolytic chlorine generation – the easiest, most effective and convenient way to maintain your pool. Simply adjust the output to achieve the precise level of chlorine. Posi-Chlor does the rest, automatically producing a steady stream of chlorine for softer, silkier pool water that's free of bacteria and other contaminants. Nothing could be easier.

Posi-Chlor® Basic



Posi-Chlor® +pH




Posi-Chlor® Advanced



TECHNICAL SPECIFICATIONS			
Model	Posi-Chlor®-15	Posi-Chlor®-25	Posi-Chlor®-35
Supply Voltage	230-240VAC, 50Hz		
Chlorine Protection	15g/hr	25g/hr	35g/hr
Maximum Power	112.5W	187.5W	263W
Cell Current	3.75A	5.75A	8.75A
Protection	IP65	IP65	IP65
Max. Temperature	40°C	40°C	40°C



CHLORINATION SIZING CHART

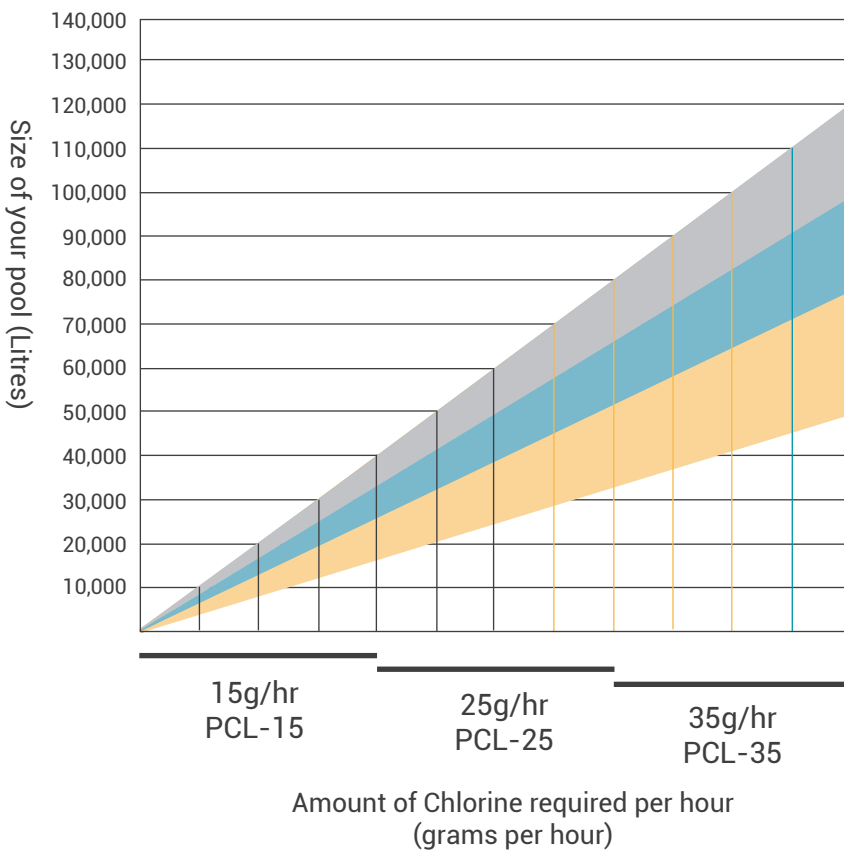

Steps to calculate the chlorine output required:

- Determine your pool size (litres)
- Move along the horizontal line until you reach your climate zone
- Go down to determine the amount of chlorine you require (g/hr)