

DW Performance In-Tank Regulator 6-45-M52




The DW Performance In-Tank Regulator is engineered to support EFI engines producing between 250HP and 700HP. This regulator features the optimum balance of OEM fitment, premium construction, and precision performance.

- Flow Increase over stock ITR w/stock pump: 309%
- Flow Increase over stock ITR w/DW300c: 154%
- Compatible with Ethanol and Pump Gas
- 3 Year Comprehensive Warranty
- OEM Fitment and Quality
- Fits: NC Miata, ND Miata, 10+ Mazdaspeed 3

Specifications

| | | | |
|----------------------------|------------------------|--------------------------|-----------------------------|
| Weight: | 0.8 oz (24g) | Opening Pressure: | 4.5 BAR (65 PSI) |
| Height: | 41.25mm (1.62") | Max Flow Rating: | 440 LPH (1.85 GPM) |
| O-ring Material: | Viton | HP Rating: | 700 HP |
| External Materials: | Stainless Steel | Inlet Ports: | 4x 5x1.25mm Openings |
| Tension Spring: | Stainless Spring Steel | Outlet Ports: | 2.25mm Diameter Single Port |

DW PPRV vs. Stock PRV (Representative Performance Increase)

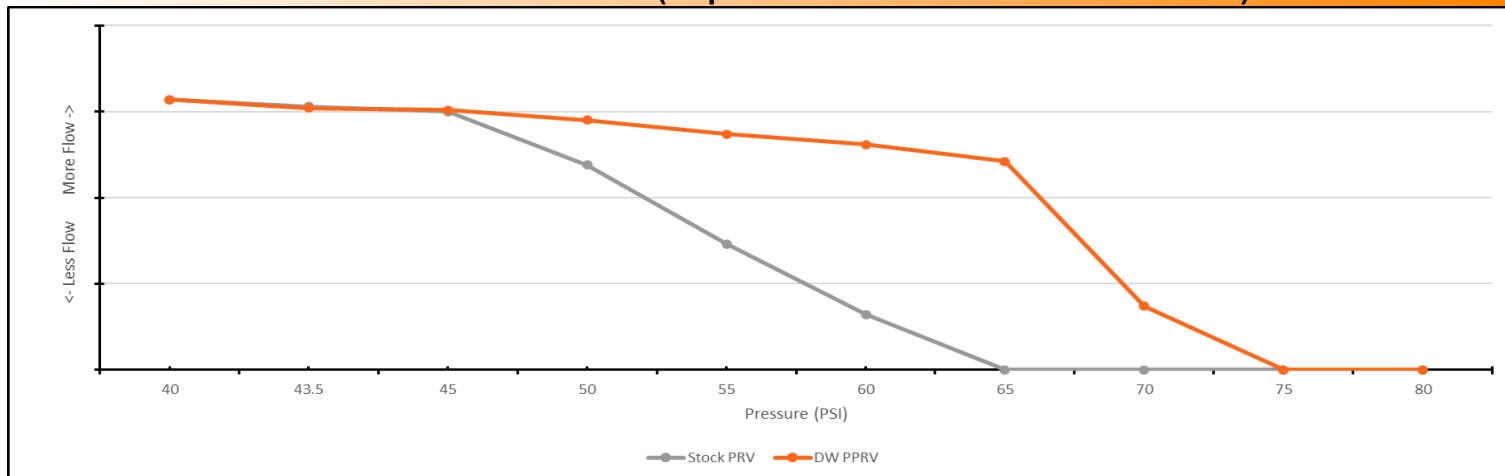

THIS PRODUCT MAY BE USED SOLELY ON VEHICLES USED IN SANCTIONED COMPETITION WHICH MAY NEVER BE USED UPON A PUBLIC ROAD OR HIGHWAY, UNLESS PERMITTED BY SPECIFIC REGULATORY EXEMPTION

—