

PRINT WITH & CLEAN YOUR SCREEN STENCILS


www.smalldogprints.com/instructions.html - for video instructions




1. For garments, insert black exposure board base OR a Flat Rate Envelope ie. USPS, etc
 * Always best to do 1st print on "scrap" material.




2. Position screen. For garments, make sure screen is over black board/envelope. Keep FLAT. Tape perimeter.

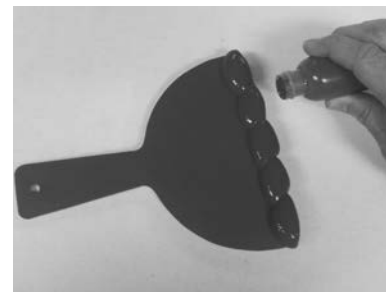

3. **Generous** amount of ink onto squeegee. 4" squeegee for QUARTER & HALF page. 6" squeegee for FULL page.

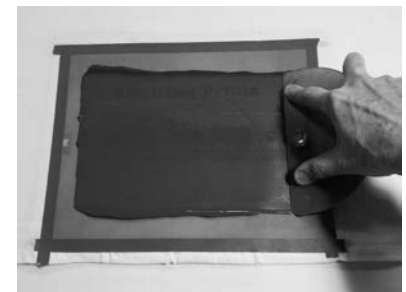

4. Position your thumb & index finger as above. Push down **FIRMLY** & swipe **ACROSS** screen. Cover all design areas.

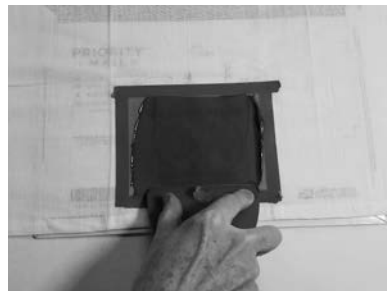


5. Smallest QUARTER page screen push firmly & swipe TOP to BOTTOM.



6. Peel up screen. **DO NOT LET INK DRY IN SCREEN!** Either keep printing or clean screen immediately.



7. Reclaim left over ink.

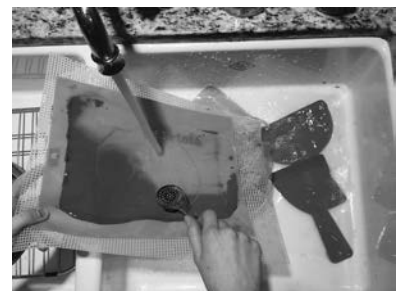

8. Clean screen on BOTH SIDES by **gently** rinsing w cleaning brush. *TIP-Use black exposure Board to support.

***ALWAYS STORE INK IN THE ORIGINAL SEALED CONTAINER**



9. Pat dry with paper towel. Air dry FLAT. Reposition every few min so doesn't stick to paper towel, tablecloth, surface, etc



10. Remove black board or envelope.




11. To heat set fabric, choose appropriate heat setting. Cover tee w/paper towel. Iron 3 minutes.

***HEAT CURE INK IN A WELL VENTILATED AREA. BREATHING FUMES MAY BE HARMFUL**



SmallDogPrints

BLACK REUSABLE FRAMES - for Repeat Printing
www.smalldogprints.com

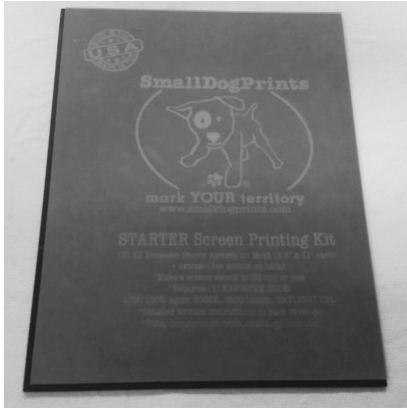

1.) To mount a frame on a screen stencil...

Position a dry screen stencil, right side up on the black Exposure Board. Smooth with hand to ensure it is laying flat.

Two sides should be about 1/4" to 1/2" away from the edges of the black board.



2.) Tape the perimeter of the black frame with 3M's half inch permanent double sided tape.




3.) Position the frame on top of the screen stencil.



4.) Align the frame's edges with the edges of the BLACK BOARD (not with the edges of the screen stencil). Ensure the frame is sitting straight.

Run fingers along the perimeter of the frame to secure it to the screen stencil.

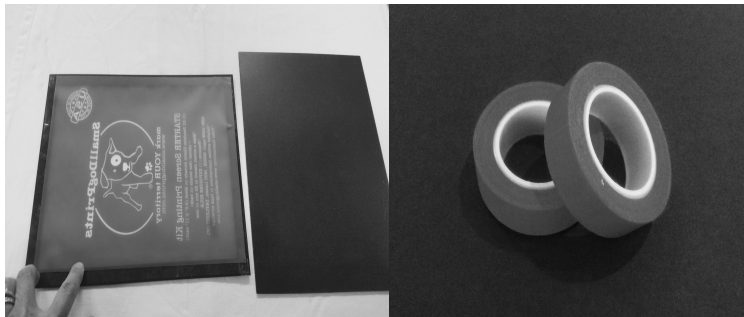

5.) Flip the frame with screen stencil over. Use Red Tape all along the perimeter of the frame to secure the back side of screen stencil to the frame and to cover the exposed double stick tape.



6.) Place the frame w/screen stencil RIGHT SIDE UP on your item to be printed. Continue printing all the items in your printing run.



7.) Do not allow ink to dry in screen stencil. Wash screen stencil under water & remove & discard both tapes.



8.) Screen stencil should air dry with dark orange back side facing up. Reposition often. Black frames can be reused.