

Zoom Dura Line


Wood/Biomass Cookstoves (24cm & 28cm models)

- **Combustion Chamber** refractory metal
- **Insulation** abrasion resistant, lightweight ceramic
- **Stovetop** six-pronged universal cast iron
- **Stick Support** with coordinating installation sockets
- **Body** painted sheet metal with reinforced doorframe
- **Bottom Tile** kiln-fired with metal lining
- **Handles** stainless steel and silicone
- **Pot Skirt** adjustable galvanized steel (optional)



Efficiency

■ Without Skirt ■ With Skirt

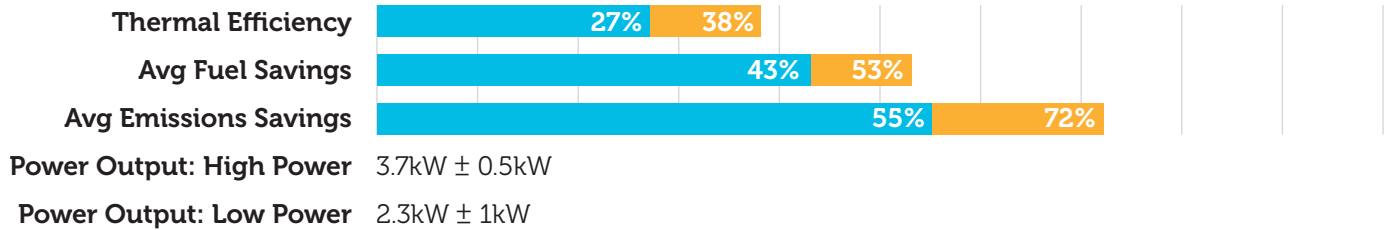

5-Liter Water Boiling Test

Conducted by Aprovecho Research Center

	Open Fire	Zoom Dura w/o skirt	Zoom Dura w/skirt
CO Emissions	65g	17g	17g
PM Emissions	1674mg	726mg	615mg
Energy to Cook	21.8MJ	13.7MJ	11.3MJ
Fuel to Cook	1253g	712g	586g
Time to Boil	38 mins	28 mins	21 mins

Shipping Specifications

Shipping Weight	Box Dimensions	20' Container Qty	40' Container Qty
8kg/unit (24cm)	(h)26cm • (w)26cm	1,120 units	2,624units
9kg/unit (28cm)	(h)29cm • (w)29cm	1,064 units	2,560 units