



PRODUCT SPECIFICATION

FLO-TANK® MODULE

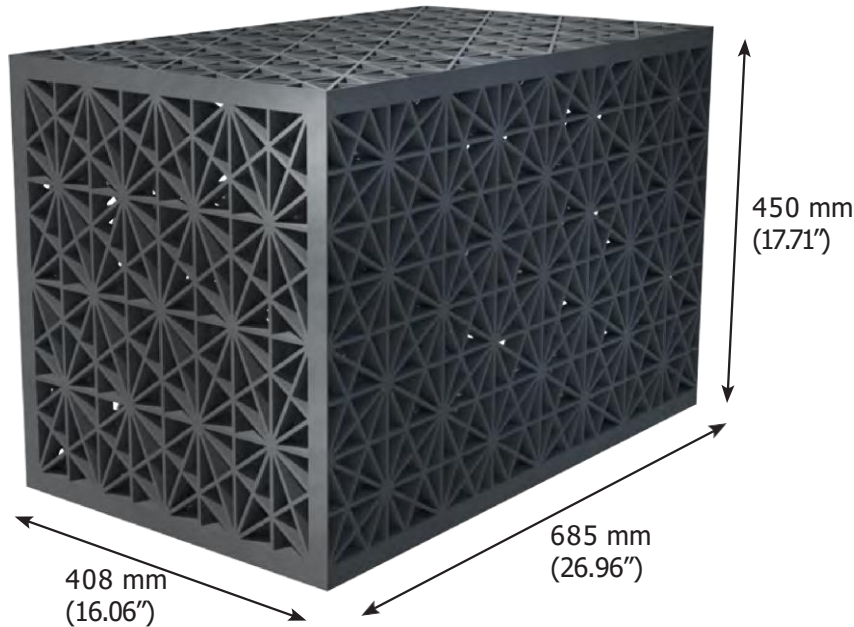

INTERNAL PLATE CONFIGURATION

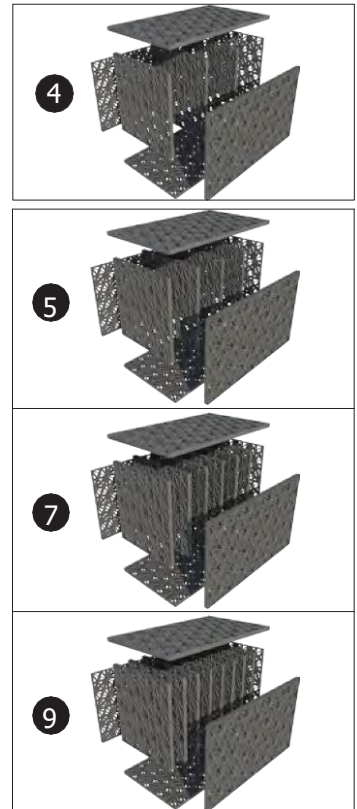

SPECIFICATIONS: FLO-TANK®

Part Number	70003
Part Size	(H) 450mm (W) 408mm (L) 685mm (H) 17.71" (W) 16.01" (L) 26.96"
Gross Volume	0.119 m ³ (4.22 cubic feet)
Ultimate Strength (RECYCLED PP)	28 tonnes/SQM (39.8 PSI) *Ultimate strength till failure (not yield)
Ultimate Strength (VIRGIN PP)	34 tonnes/SQM (48.36 PSI) *Ultimate strength till failure (not yield)
Flow Rate	11.5 L/sec @ 1% Gradient (182.3 US gpm @ 1% Gradient)
Volume Void	95%
Material	85% Recycled Polypropylene 15% Propriety Selected Materials
Colour	Black
Chemical & Biological Resistance	Unaffected by molds, algae, soil-bourne chemicals, bacteria and bitumen.
Service Temperature	-10° C - 70° C (14 F° - 158 F°)
Approximate Material Lifespan	100 years + with no ultra violet exposure


Note: Atlantis® product specifications are updated on a regular basis. Please contact Atlantis® technical department for the latest data sheet available

Scan the code for more information about our products



PRODUCT SPECIFICATION

FLO-TANK® MODULE PRODUCT RANGE

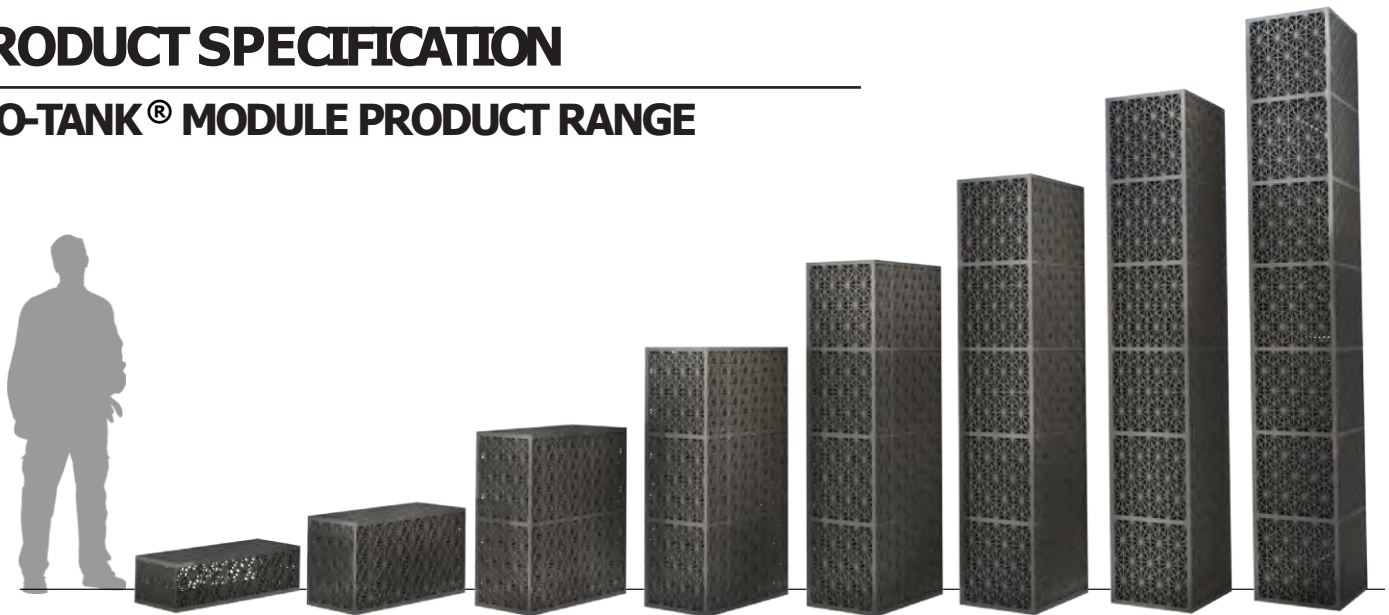

METRIC		MINI	SINGLE	DOUBLE	TRIPLE	QUAD	PENTA	HEXA	SEPTA
NAME		MINI	SINGLE	DOUBLE	TRIPLE	QUAD	PENTA	HEXA	SEPTA
PART NUMBER		70010	70003	70004	70005	70006	70007	70008	70009
HEIGHT	mm	240	450	880	1310	1740	2170	2600	3030
WIDTH	mm	408	408	408	408	408	408	408	408
LENGTH	mm	685	685	685	685	685	685	685	685
MODULES	m ³	15.70	8.37	4.28	2.88	2.16	1.74	1.45	1.24
GROSS VOLUME	L	67	126	246	366	486	606	727	847
STORAGE	L	64	119	234	348	462	576	690	804

IMPERIAL

NAME		MINI	SINGLE	DOUBLE	TRIPLE	QUAD	PENTA	HEXA	SEPTA
PART NUMBER		70010	70003	70004	70005	70006	70007	70008	70009
HEIGHT	INCH	9.45	17.71	34.64	51.57	68.5	54.43	102.36	119.29
WIDTH	INCH	16.06	16.06	16.06	16.06	16.06	16.06	16.06	16.06
LENGTH	INCH	26.96	26.96	26.96	26.96	26.96	26.96	26.96	26.96
GROSS VOLUME	G	18	33	65	97	128	102	192	224
STORAGE	G	17	32	62	92	122	97	182	212

Note: Atlantis® product specifications are updated on a regular basis. Please contact Atlantis® technical department for the latest data sheet available