

CLASSIC SINGLE

SINGLE POCKET DOORS SYSTEM



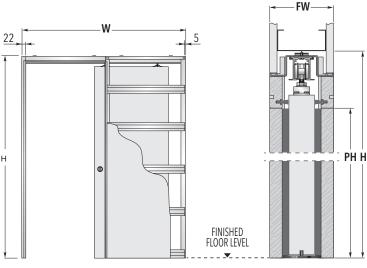



22 W 5 12,5 FW 25 PW 25

Note: Non standard sizes on request

PLEASE NOTE INBUILT TOLERANCE

If setting out your studwork before delivery of your frame please note there is approximately an 8mm tolerance built into the height of these pocket door systems which you will need to take into account. Packers may be required to accommodate for this gap if you are unable to adjust the studwork above the system.

Note: Frame should be installed at finished floor level.

| FRAMES FOR SINGLE DOORS | | | DOOR PANELS UK | |
|------------------------------|--------------------------|----------------------------|--|------|
| MAX. PASSAGE SIZE PW x PH | OVERALL DIMENSION W x H | FINISHED WALL FW | DW | DH |
| 600 x 2030 | 1294 x 2120 | 100 - 125 | 626 | 2040 |
| 700 x 2030 | 1494 x 2120 | 100 - 125 | 726 | 2040 |
| 800 x 2030 | 1694 x 2120 | 100 - 125 | 826 | 2040 |
| 900 x 2030 | 1894 x 2120 | 100 - 125 | 926 | 2040 |
| 1000 x 2030 | 2094 x 2120 | 100 - 125 | 1026 | 2040 |
| 585 x 1971 | 1279 x 2061 | 100 - 125 | 2ft. 0in. x 6ft. 6in. (610 x 1981 mm) | |
| 661 x 1971 | 1455 x 2061 | 100 - 125 | 2ft. 3in. x 6ft. 6in. (686 x 1981 mm) | |
| 737 x 1971 | 1631 x 2061 | 100 - 125 | 2ft. 6in. x 6ft. 6in. (762 x 1981 mm) | |
| 813 x 1971 | 1707 x 2061 | 100 - 125 | 2ft. 9in. x 6ft. 6in. (838 x 1981 mm) | |
| 900 x 1971 | 1894 x 2061 | 100 - 125 | 3ft. 0in. x 6ft. 6in. (914 x 1981 mm) | |
| 675 x 1971 | 1469 x 2061 | 100 - 125 | 2ft. 4in. x 6ft. 6in. (711 x 1981 mm) | |
| 775 x 2020 | 1669 x 2110 | 100 - 125 | 2ft. 8in. x 6ft. 8in. (813 x 2032 mm) | |
| 850 x 2020 | 1844 x 2110 | 100 - 125 | 2ft. 10in. x 6ft. 8in. (864 x 2032 mm) | |

Dimensions are given in mm



NOTES

- ► Non standard sizes available up to PW 2000 x PH 3000 mm; door panel size DW 2026 x DH 3010 mm.
- ▶ Suitable for 35 or 44 mm thick doors.
- $\,\blacktriangleright\,$ Includes complete timber lining kit for a professional finish.
- ▶ Doors, plasterboard and final architrave not supplied.
- When fitting flush pull handles we recommend the stop be regulated so the door protrudes from the pocket to avoid risk to fingers.
- Should the door be set to enter the pocket completely we do not accept any liability.
- ► Install at finished floor level.
- ▶ Self-centering floor guide with anti-warp profile.
- ► Max. door panel weight 100 kg (150 kg on request).

ACCESSORIES

▶ Door Furniture

Flush pulls and bathroom locks

▶ ECLISSE BIAS®

Soft close up to 40 kg with anti-slam

► ECLISSE BIAS® DS

Bi-directional soft close up to 40 kg with anti-slam

▶ Soft Close

Slide the door towards the close position, the soft close takes over

Self Closing Mechanism

Open the door and it closes by itself!

► E-MOTION

Linear motor open/close



Sliding Pocket Door Systems