USKY 10



Sliding door hardware for wooden doors up to 100kg

Versatile and silent, the Husky sliding door hardware system is ideal for creating wardrobe doors and room dividers with one or more wooden, wooden framed, composite or metal doors. The Husky 100 supports doors of up to 100kg. A fittings kit is available to be purchased which allows an additional door to be fitted to the track.

This product is also available with an integrated soft stop system, please see Husky Soft Stop for more detail

Features and Benefits

- Available with a choice of galvanised steel or aluminium track, complemented with nylon rollers to ensure a smooth, quiet operation
- Reliable and highly versatile sliding door hardware utilising precision made components for a trouble free operation
- Metal doors should be lightly constructed or channel or angle framing, clad with sheeting as required
- The opening can be covered by one or a number of doors sliding to either side. When the door travels more than its own width, a continuous bottom guide channel must be used with two guides per doors
- Flexible fixing options. The track may be soffit fixed direct to the underside of the lintel (single or multiple runs) or face fixed with brackets




HENDERSO

Product and Door Specification										
Kit Short Code (Steel Track)	Kit Short Code (Aluminium Track)	Door Material	Track Length	Door Thickness Range	Max. Door Width	Max. Door Height	Max. Door Weight			
H100/15	H100/15A	Wood/Metal	1500mm	20 - 50mm	800mm	2700mm	100kg			
H100/18	H100/18A	Wood/Metal	1800mm	20 - 50mm	950mm	2700mm	100kg			
H100/20	H100/20A	Wood/Metal	2000mm	20 - 50mm	1050mm	2700mm	100kg			
H100/24	H100/24A	Wood/Metal	2400mm	20 - 50mm	1250mm	2700mm	100kg			
	H100	Fittings kit for where an additional door is required					100kg			

Kit Contents						
Component	Short Code (Aluminium)*	Short Code (Steel)				
Track (x1)*	280A/***	280/***				
Face Fixed Brackets	281A	281				
Nylon Bodies Hangers (x2)	284**	284**				
Nylon Guide (x1)	102N	102N				
Clip Stop (x1)	601H	601H				
Track Stop (x1)	287	287				

- ****Replace with length of track for full short code
- * An anodised aluminium track (280AN/****) is also available
- **For metal doors use 285




Watch the Installation Video

Visit www.pchenderson.com/husky-sliding-installation or scan the QR code using your phone



n	20 - 50mm		1250mm		2700mm	100kg		
additi	onal door is	required				100kg		
Accessories								
Simultaneous Action Kit		For biparting doors		SIM100				
Soffit Fixed Fascia		For doors up to 50mm thick		F134/***				
Face Fixed Fascia		For doors up to 50mm thick		F140/***				
Face Fixed		For steel track (pack of 5 or 8)		2815 or 2818				
Brac	kets	For aluminium track (pack of 5 or 8)		2815A or 2818A				
Rolle	er Guide	For metal doors		106N/94		6000		
Guide Channel		Aluminium		94X/***				
		Oval, 144mm x 44mm in black or satin		144B or 144S				
Flus	h Pulls	Round, in satin, chrome, black or polished brass		385/S, 385/C, 385/B or 385/P		00.		
		Square, in satin, chrome or black		53/S, 53/C or 53/B				
		Rectangular in satin or chrome		125/S or 125/C				
Planet Acoustic Drop Seal*		For doors between 675-1675mm wide, available in left and right hand variants		or DS	EAL/***L EAL/***R			
* Only available for applications without a guide channel and doors with a minumum thickness of 35mm								

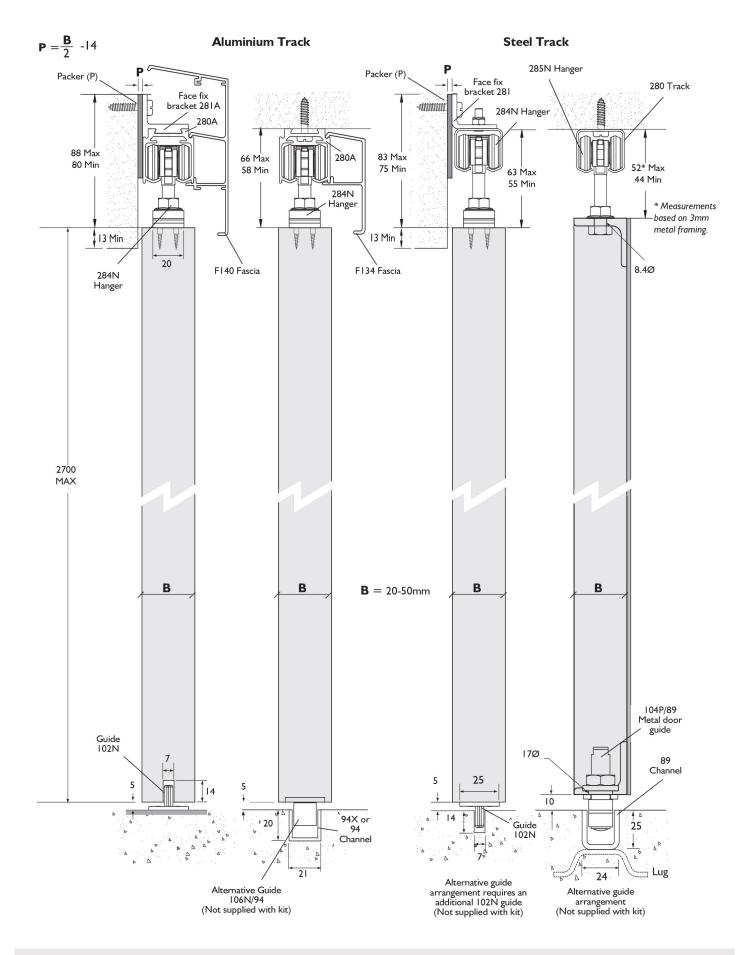

For further information, please contact us on:

UK Sales

Export Sales

T: **+44 (0) 191 377 7345**

T: **+44 (0) 191 377 7346**

E: sales@pchenderson.com

E: international@pchenderson.com

W: www.pchenderson.com

W: export.pchenderson.com