


Médard 42 Ceiling Recessed LED GE




134320XX_134321XX_134322XX_134323XX

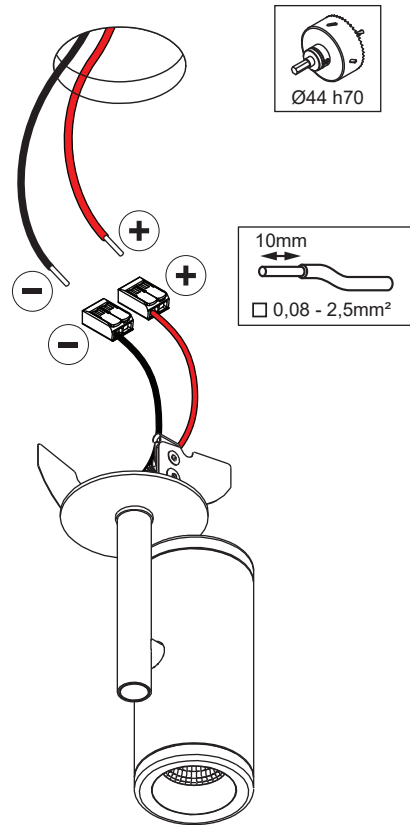

Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	14,0	18,0	5,6
500	14,2	18,2	8,1
700	14,5	18,5	11,5

For serial connection, respect polarity!

⊕ RED	⊖ BLACK
-------	---------

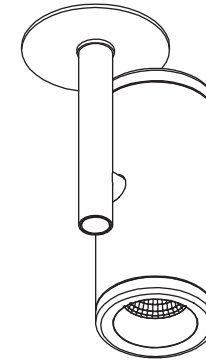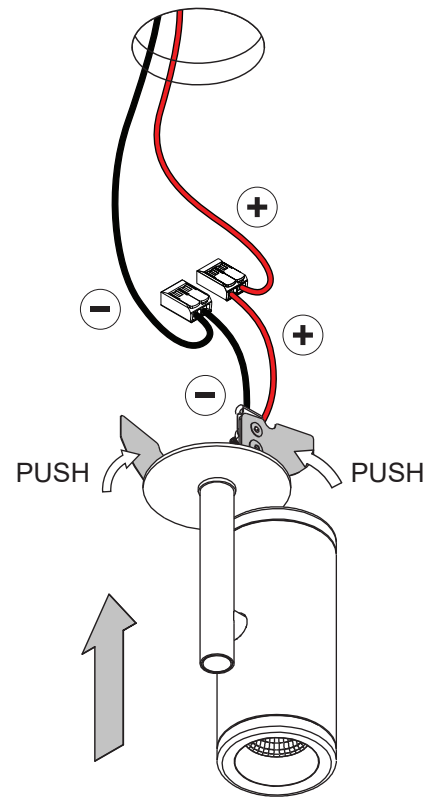

	LIGHT SOURCE - DO NOT TOUCH LED Touching the LED can result in permanent damage of the light source. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
	PREVENTING ELECTROSTATIC DAMAGE A discharge of static electricity may damage sensitive components. Always be properly grounded when touching leads or circuitry inside the luminaire. Use a wrist strap connected by a ground cord to the housing. Avoid touching the light sources with bare hands.
DRIVERS & ACCESSORIES	
For latest version of driver matrix and available accessories check www.supermodular.com or connect with your sales contact.	

