


STATICO

Global Supplier of Static Control & Cleanroom Products
541 Taylor Way, Unit #1. San Carlos, CA 94070. USA. www.statico.com
Tel.: (650) 592-4733. Fax: 650-508-0761. sales@statico.com

Product Specifications for S1460TM Series ESD Tray Mats

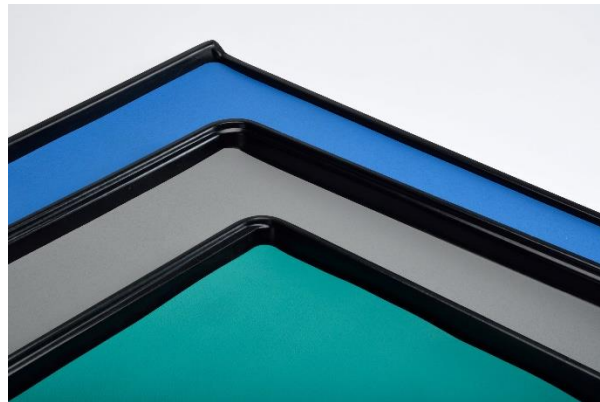

Description

The S1460 Tray Mat Series is a 2-Layer ESD Rubber Mat with a Textured Surface Finish. Standard size of 16"x24"x0.080" with rounded corners cut to order. Custom cut sizes available upon request. This product provides the highest quality rubber matting in the industry. Meets & exceeds requirements of ANSI-ESD S20.20-2014.

Specifications

Colors	Blue/Black; Green/Black; Gray/Black
Thickness	80 mils (2 mm)
Tensile Strength	1000 psi (min), ASDM-D-412
Elongation @ Break	300% (min), ASDM-D-412
Durometer (Shore A)	60 min, ASDM-D-2240
Resistance	8 x 10 E6 ohms Surface-To- Groundable Point (RTG), EOS/ESD-S4 Resistance 2 x 10 E7 ohms Between Two Points on Surface, RTT, EOS/ESD-S4 Charge
Decay Time	0.01 Seconds, FTMS 101C 5,000V to 50V (Technical Zero) Method 4046C

*Part Numbers for Standard 16"x24" Size**

Green Color	S1460TM-1624GN
Blue Color	S1460TM-1624BB
Gray Color	S1460TM-1624GY

*** Custom cut sizes available upon request**