


Kolbi Wrap Around Pipe Markers are designed to meet engineering specifications for durability and safety. These pre-coiled, semi-rigid vinyl markers significantly reduce installation time by snapping onto pipes and go over moisture, dirt or grease without pipe preparation. Full wrap marker styles provide full 360 degree visibility for added safety.

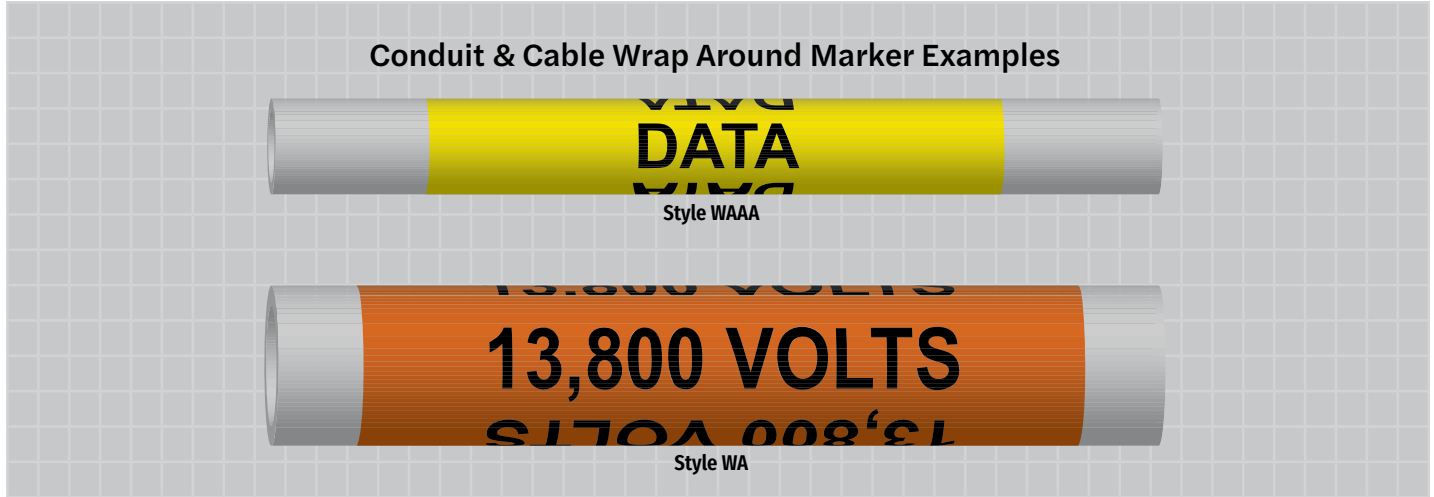

Style	Pipe OD (including insulation)	Marker length	Letter size
WAAA	Less Than 5/8" (15.88mm)	2-1/4" (57.15mm)	1/4" (6.35mm)
WAA	Less than 3/4" (19.05mm)	4" (101.6mm)	1/4" (6.35mm)
WA	3/4" - 1" (19.05mm - 25.4mm)	8" (203.2mm)	1/2" (12.7mm)
WB	1-1/8" - 2-3/8" (28.575mm - 60.33mm)	12" (304.8mm)	3/4" (19.05mm)
WC	2-1/2" - 3-1/4" (63.5mm - 82.55mm)	12" (304.8mm)	1-1/4" (31.7mm)
WD	3-3/8" - 4-1/2" (85.73mm - 114.3mm)	12" (304.8mm)	1-1/4" (31.7mm)

Color Combinations	
WHITE	WHITE
WHITE	BLACK
BLACK	WHITE
BLACK	Additional colors available

Standards Met	ANSI/ASME A13.1-2015 "Scheme for Identification of Piping Systems" ANSI Z535.1 "Safety Color Code"
Installation Instructions	No surface preparation necessary, Sizes WAAA to WE snap on and sizes WF thru WH strap on with nylon straps.
Service Temperature	-40°F to 180°F (-40° C to 82.22° C)
Water Resistance	Excellent
Finish	Matte Finish
Material Properties	.015" semi-rigid vinyl styles (WAAA to WB) .025" semi-rigid vinyl (styles WC to WH)
Ink Properties	Inks resistant to fading with UV exposure, Semi-Gloss Finish
Storage Stability	Indefinite at 70°F (21°C) and 50% RH
Chemical Resistance	Resistant to Acids, Alkalis and Salts
Abrasion Resistance	Good
Outdoor Durability	4 to 6 years, UV Resistant option available for outdoor use
UV Resistant Option	6+ Years
Equivalent To	Electromark Labels, Marker Services Coiled Conduit and Cable Markers, Brimar System 1 Voltage Markers

DATE / / JOB _____
MM DD YYYY

CONTRACTOR NAME _____