H3X ELEMENT SST 208V

22.3" x 20.5" x 7.5" (56.6cm x 52.1cm x 19.1cm)



- Digital thermostat provides consistent and precise temperatures from 60° - 212°F (15.6°-100°C)
- Contemporary, low-profile design for front-of-house and selfservice settings
- Push and Hold dispense -with one programmable Portion Control setting for a volume of up to 2 gallons (7.57 liters)
- LED display provides simple temperature adjustment
- Thinsulate® tank insulation provides increased energy efficiency
- Programmable "Energy Saver Mode" reduces operating costs during idle periods
- 7.75in (196mm) cup clearance accommodates a range of serving options for custom-crafted, hand pour coffees and teas

Servers and airpots sold separately

Agency:



Specifications

Product #: 45300.0007

Water Access: Plumbed

Finish: Stainless

Temp. Setting: 212°F (100.000°C)

Dispense: Portion Control

Dispense: Push Button



Additional Features

Hot Water Button

Electrical & Capacity

Volts	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
208	15.4	3200	No	-	-	60°F (15.5°C)	1	2	60

Plumbing Requirements

PSI kPa **Fitting Supplied** Water Flow Required (GPM) 20-90 138-621 1/4" Male Flare Fitting

CAD Drawings


2D	Revit	KLC
•		


Created on:


09/15/2017




BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.





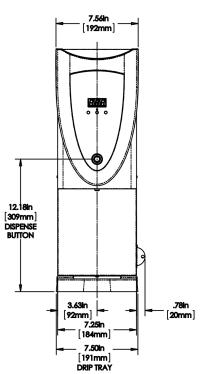

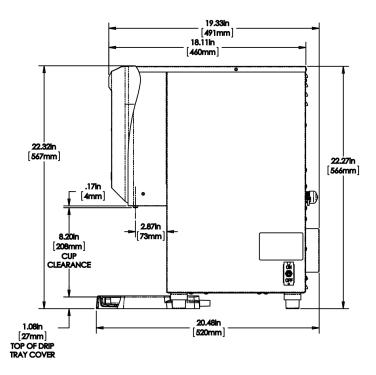

Unit				Shipping					
	Width	Height	Depth	Width	Height	Depth	Weight	Volume	
English	7.5 in.	22.3 in.	20.5 in.	10.6 in.	32.3 in.	21.9 in.	23.810 lbs	4.398 ft ³	
Metric	19.1 cm	56.6 cm	52.1 cm	26.9 cm	82.0 cm	55.6 cm	10.800 kgs	0.125 m³	



Related Products & Accessories: H3X ELEMENT SST 208V(45300.0007)

TRAY, DRIP H3E ELEMENT

Product #: 48885.0001



