SCH 50



107 lb Self-contained Ice Machine

Technical features

- Stainless steel bodywork
- Vertical pump
- Main switch (ON/OFF)
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Electronic PCB to create perfect cubes and help troubleshooting with alarm signals
- Scale tap
- · Adjustable feeds
- Bin sensor termic
- Easy clean Spray system
- R290 condenser



Internal bin capacity




48.5 lb of ice

1100 cubes

Type of ice

Full Cubes

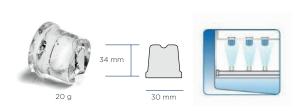

Voltage	Machine dimensions			
	_			

115/60/1 Standard version Exterior dimensions 18.2x22.4x35.3 in

WxDxH Product Weight 83.8 lb

Shipping Dimensions 21.3x25.2x35.4 in

Shipping Weight (approx.) 97.0 lb

Technology and Certifications



FOOD SERVICE SOLUTIONS INC. 2-6599 Kitimat Road Mississauga, ON L5N 4J4 (800) 668-8765 e-mail: info@myfss.ca



SCH 50



107 lb Self-contained Ice Machine

Accessories

- Scoop
- Hose set tubes
- Drain tube
- Legs
- Floor mount kit to be provided with the unit to be ordered as accessory (SCKITFLOOR5CH50)

Warranty


- 3 years parts and labor costs
- 'kWsteiSds'fka`Ua_bdWstead



SCH 50



107 lb Self-contained Ice Machine

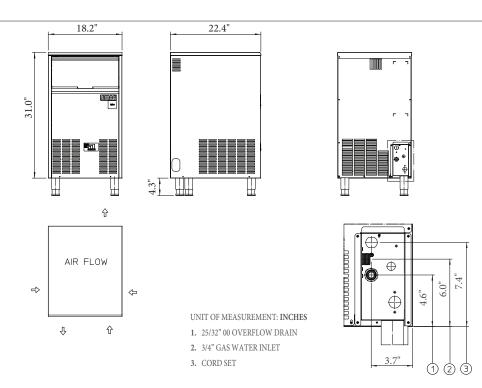

DRAINAGE PER GRAVITY

Operating Limits

	Minimum	Maximum
Air temperature	50°F	100°F
Water temperature	40°F	100°F
Water pressure	1 bar	5 bar
Electrical voltage	-10 %	+10 %

Specifications and design are subject to change without notice

Model	37-14	Daily production lb Daily produc		duction kg	Power input	Refri-	Fuse	Consumptions (**)				
	Voltage	21/10°C 70/50°F	32/21°C 90/70°F	21/10°C 70/50°F	32/21°C 90/70°F	Watt (*)	gerant	A	kJ/kg	kWh/ 100lb	l/kg	Water gal/100lb
SCH 50 A	115/60/1	107	83	48.5	107	495	R290	10	799	10.07	2.9	35
(*) Power Input	at 90°F Ambient	Геmperature			'							'
(**) Water Cons	sumption: at 90°F A	ir and 70°F Wat	er									

