Stage: 119mm x 119mm with stage clips or factory installed double-plate mechanical stage with low position controls and iris diaphragm.

Substage: 3088F models offer a built-in N.A. 0.65 condenser with five aperture disc or iris diaphragm. The 3089F incorporates an N.A. 1.25 abbe condenser with iris diaphragm on a spiral mount.

Focusing: Separate coarse and fine adjustment controls with tension adjustment on the coarse control. Built in slip-clutch system and pre-set focus stop prevents accidental damage to objectives or slides.


Illumination: Built-in 5 watt fluorescent illumination with collector lens and ON/OFF switch or variable, rechargeable LED illuminator for corded or cordless operation. Grounded 3-wire line cord and cord hanger for simple and easy storage.

Optional Accessories: Eyepieces - WF15x (15mm F.O.V.) or WF20x (11mm F.O.V), Objectives - 20x and 60xR\*, Mirror and fork, 21mm micrometers and microscope carry case.

Miscellaneous: 5-year warranty and dust cover supplied with each complete model.

Dimensions (L-W-H):9" x 6 3/8" x 15"

Cord Hanger




**3088F Microscope Series** ACCU-SCOPE's 3088F microscope series was

designed to provide educators with a high performance, student-proof instrument at an affordable price. The 3088F series includes many professional features while remaining easy to use and maintain for secondary schools, technical institutes and hobbyists.

Eyepiece: WF10x eyepiece with pointer, 18mm field of view. The eyepiece is locked-in to prevent classroom tampering.

3088F-T




Stand: Full size stand with separate coarse and fine adjustment controls set in ergonomic, low positions for comfortable use. Cast alloy aluminum stand with an acid resistant lustrous almond finish.

Nosepiece: Rear facing, triple (3088F) or quadruple (3089F) revolving, ball-bearing nosepiece with positive click stops to ensure parcentration.

Objectives: DIN standard achromat, parfocal, parcenter and color-coded. All models include 4x (N.A. 0.10), 10x (N.A. 0.25) and 40xR\* (N.A. 0.65). A 100xR\* (N.A. 1.25) objective is also supplied with the 3089F.

\*Retractable Spring Mount

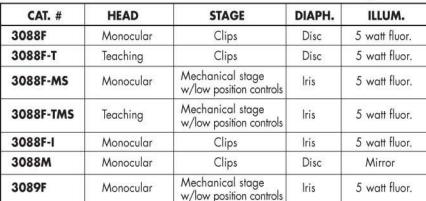

## LED ILLUMINATION AVAILABLE ON ALL MODELS



631-864-1000 www.accu-scope.com

We reserve the right to change and improve specifications without notice usually due to technological and manufacturing advances.

WARRANTY: 5 years for manufacturing defects supplied with each microscope. ©COPYRIGHT 2010 ACCU-SCOPE INC. ALL RIGHTS RESERVED. PRINTED IN THE U.S.A.



Distributed By:

