

EKI-2725F/FI

4GE + 1SFP port Gigabit Unmanaged Industrial Ethernet Switch



Features

- ③ Provides 4 GE+ 1 SFP ports with auto MDI/MDI-X
- ③ Supports 10/100/1000 Mbps auto negotiation
- ③ Supports jumbo frame transmission up to 9kb
- ③ Provides slim size, DIN-rail with IP30 metal mechanism
- ③ Supports redundant 12 ~ 48 V_{DC} power input and P-Fail relay
- ③ Provides broadcast storm protection

Introduction

The EKI-2725F supports Gigabit Ethernet. The power rating is +12 ~ 48 V_{DC} redundant input design, and is secured with a double protection mechanism: Power Polarity Reverse Protection and an Overload Current Fuse. The former tolerates reverse power wiring while the later secures the system from overload currents. Each port of EKI-2725F has 2 LED's to show the link status transmission speed and collision status. It also provides a relay output for an event alarm. In the event of a power failure, the built-in LED will activate the alarm to notify administrators. Engineers can simply verify the hardware status by checking the LED, which makes troubleshooting quick and easy. EKI-2725F comes with compact metal housing rated at IP30 to protect against dusty industrial environments.

Specifications

Communications

- ③ **Standard** IEEE 802.3, 802.3u, 802.3x, 802.3ab, 802.3z
- ③ **LAN** 4 x 10/100/1000Mbps(RJ-45)+
1 x 100/1000Mbps(SFP)
- ③ **Transmission Distance** Ethernet: Up to 100 m (4-wire Cat.5e, Cat.6 RJ45 cable)
SFP: Up to 110 km (depends on SFP)
- ③ **Transmission Speed** Up to 1000 Mbps

Interface

- ③ **Connectors** 4 x RJ45 + 1 x SFP
6-pin removable screw terminal (power & relay)
- ③ **LED Indicators** P1, P2, P-Fail
10/100/1000T (X): Link/Activity, Duplex/Collision
SFP: LNK/ACT

Power

- ③ **Power Consumption** 2.5W
- ③ **Power Input** 12 ~ 48 V_{DC}, redundant dual inputs
- ③ **Fault Output** 1 Relay Output

Mechanism

- ③ **Dimensions (W x H x D)** 30 x 140 x 95 mm (1.18" x 5.51" x 3.74")
- ③ **Enclosure** IP30, metal shell with solid mounting kits
- ③ **Mounting** DIN-rail, wall

Protection

- ③ **Power Reverse** Present
- ③ **Overload current** Present

Environment


- ③ **Operating Temperature** -10 ~ 60 °C (14 ~ 140 °F)
-40 ~ 75 °C (-40 ~ 167 °F) / (I model)
- ③ **Storage Temperature** -40 ~ 85 °C (-40 ~ 185 °F)
- ③ **Operating Humidity** 10 ~ 95% (non-condensing)
- ③ **Storage Humidity** 10 ~ 95% (non-condensing)
- ③ **MTBF** 1,868,330 hours

Certifications

- ③ **Safety** UL 62368
- ③ **EMI CE, FCC Class A**
- ③ **EMS** EN 61000-4-2
EN 61000-4-3
EN 61000-4-4
EN 61000-4-5
EN 61000-4-6
EN 61000-4-8
- ③ **Shock** IEC 60068-2-27
- ③ **Freefall** IEC 60068-2-32
- ③ **Vibration** IEC 60068-2-6

Dimensions

Unit: [mm]

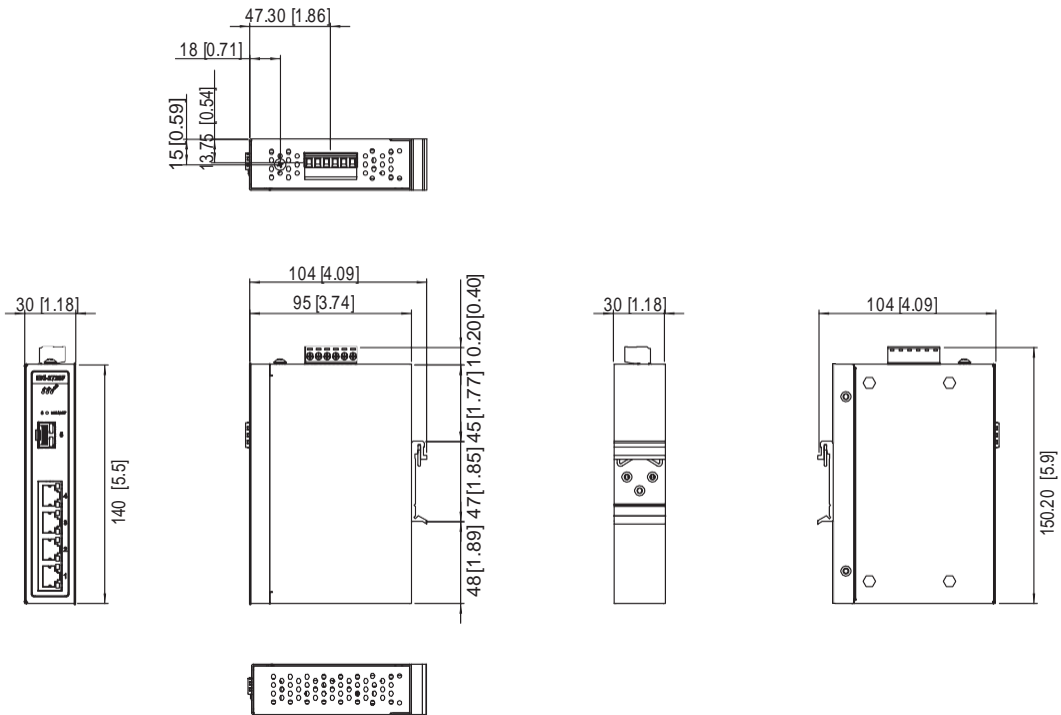

Ordering Information

- ③ EKI-2725F-AE 4GE + 1 SFP unmanaged switch
- ③ EKI-2725FI-AE 4GE + 1 SFP unmanaged switch w/wide temp

Industrial Communication Products Ltd

Tel: +44(0) 203 086 9569

Web: www.industrialcomms.com

Email: sales@industrialcomms.com