

LED TUBE SERIES - 8 FT

T8 tube type B - Ballast bypass

5000k

6500k

MM-818331-50

MM-818332-50

MM-818331-65

MM-818333-50



Pure aluminum
heat sink
for optimum durability.



FEATURES

- Input voltage: AC100-277V
- Warranty: 5 years
- Rated lifetime: 50 000 hours
- Power factor: > 0.9
- Color Rendering Index: > 80
- Viewing angle: 180°
- FA8/R17d HO base
- F96T8 or F96T12 Replacement

ADVANTAGES

- Bypass Ballast, No ballast needed
- Environmentally friendly without mercury
- Double-end powered
- Tubes are rated at 50,000hours life
- Clear / Striped / Milky Cover are available





LIGHT SPECIFICATIONS

SKU	MM-818331-50	MM-818332-50	MM-818331-65	MM-818333-50
LM/W	130	130	130	130
CCT	5000K	5000K	6500K	5000K
Finish	Frosted	Clear	Frosted	Frosted
Size	8FT (96" long)	8FT (96" long)	8FT (96" long)	8FT (96" long)
Base	FA8 (single pin)	FA8 (single pin)	FA8 (single pin)	R17d HO

PHYSICAL


Material	Aluminum + Plastic Cap
Operating Temp.	-20 ~ 49 °C
Base type	FA8 or R17d

CERTIFICATION

Certifications	ETL CE RoHS
Environment	Dry, Damp
Warranty	5 years limited


GENERAL PERFORMANCE

Rated Lifetime	50,000 Hours
CRI	> 80
Dimmer	Non-dimmable
Power Factor	> 0.9
Input voltage	AC100-277V
Viewing angle	180°
THD	< 20%

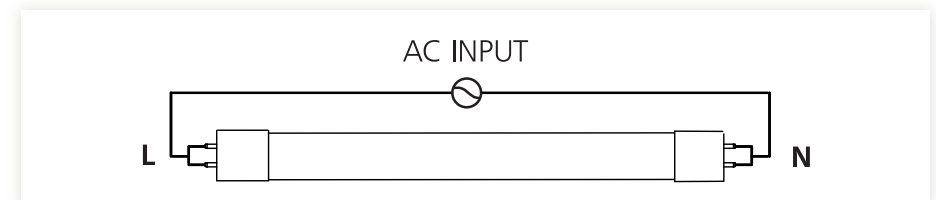




LED TUBE DIMENSION

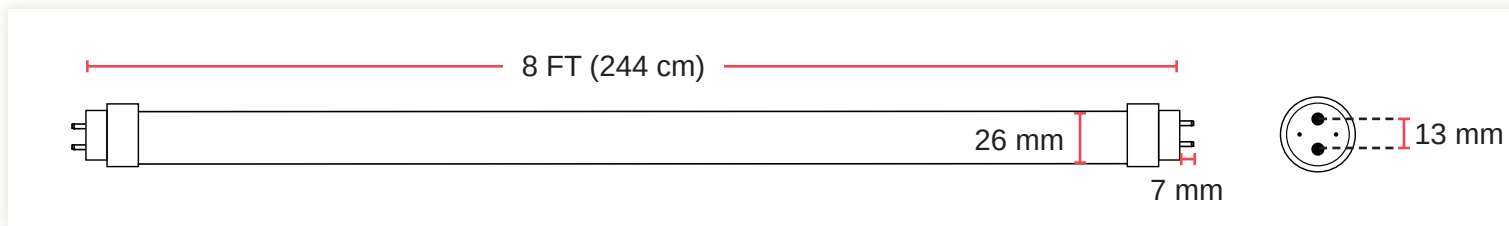

PACKAGE DIMENSION

Dimension	PCS/CTN	Dimensions / each Tube	Dimensions / one CTN	Weight/ one CTN
2.4m / 8FT	20	93.90 x 1.14 x 1.30 inches	96.06 x 8.66 x 8.27 inches	30.53 lbs

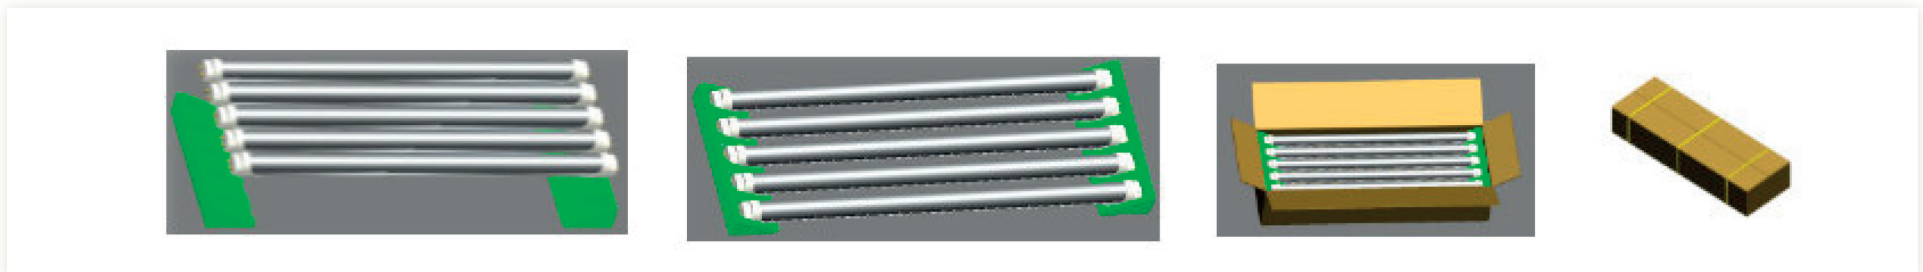

DECEMBER23