



REAR CONNECT PLATE

Two professional twist-lock SPEAKON™ connectors and two standard 1/4" phone jacks are featured. Use these connectors for connecting to the power amp and daisy chaining to an additional speakers.

SPEAKER CABLES

The PH50 is our standard cable when purchasing a complete sound system. These cables feature 1/4" plugs and heavy 16 gauge copper wire. The PH50 is adequate for lengths up to 50' under normal use. You can DAISY-CHAIN up to one additional speaker per cable by using the unused 1/4" OUTPUT™ jack (right side) on your speaker jack plate. Be sure to note the total impedance to the amp so it is not lower than it's recommended impedance. See *Typical Loudspeaker Impedance Configurations*.

PRECAUTIONS

1) DO NOT EXCEED THE POWER RATING marked on the rear connect plate. Excessive power will destroy drivers. 2) DISTORTION from power amps will destroy drivers much faster than clean power. 3) WATER, MOISTURE, and DUST are harmful to drivers causing failure which is not covered under warranty.

WARRANTY

CARVIN loudspeakers are covered by a ONE year limited warranty unless otherwise stated. Warranty coverage is limited to original manufactures defects only. WARRANTY DOES NOT COVER: 1) Opened or burned voice coils. 2) Torn cones caused by improper packing or abuse. 3) Damage from rain, moisture, ETC. When returning defective driver(s), remove them from the enclosure to reduce shipping costs. DO NOT stuff paper into the driver(s). Return pre-paid by UPS. Include your address and description of the problem. Your driver(s) will be returned COD for the cost of shipping and reconditioning if not covered under warranty.

Congratulations on your selection of the 832 loudspeaker. The 832 is one of our most popular because of its exceptional cost to performance value. This 400 watt system features a large 15" woofer that delivers great bottom end while the large radial horn delivers crystal clear treble. This is one of our most efficient speakers for its size. It's great for indoor or outdoor performances, churches, schools or clubs. Use it with the optional TS30BN stand. The 832 includes a built-in recessed bracket for easy mounting to speaker stands.

RECEIVING INSPECTION

INSPECT YOUR SPEAKER FOR ANY DAMAGE which may have occurred during shipping. If any damage is found, please notify the shipping company & CARVIN.

SAVE THE CARTON & ALL PACKING MATERIALS. In the event you have to re-ship your unit, always use the original carton and packing material. This will provide the best possible protection during shipment. CARVIN and the shipping company are not liable for any damage caused by improper packing.

SAVE YOUR INVOICE. It will be required for warranty service if needed in the future.

SHIPMENT SHORTAGE. If you find items missing, they may have been shipped separately. Please allow several days for the rest of your order to arrive before inquiring.


RECORD THE SERIAL NUMBER on the enclosed warranty card or below on this manual for your records. Keep your portion of the card and return the portion with your name and comments to us.

SUGGESTIONS FOR OPTIMAL PERFORMANCE


Raise the enclosure to the ear level of your audience for greater coverage. To help control feedback, use a graphic equalizer. Keep the speakers in front of the microphone. Never direct the microphone towards the speaker. For greater coverage, add a second speaker system 20° to 30° off axis.

TYPICAL LOUDSPEAKER IMPEDANCE CONFIGURATIONS

Individual speaker or speaker cabinet wiring examples for total impedance.

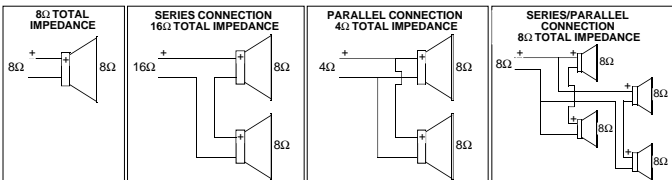

832 FREQUENCY RESPONSE

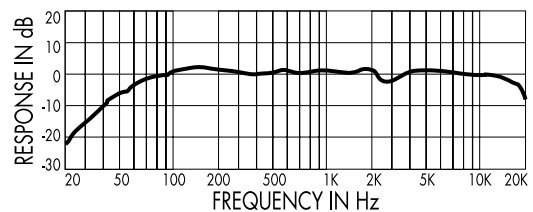

MODEL 832 SPEAKER SYSTEM SPECS:

- Frequency Response:** 65 Hz to 17 kHz ±3 dB
- Useable Low Frequency:** 42 Hz (-10 dB)
- Power Handling:** 400w Continuous Power
- Recommended Amp:** 50 to 600 watts
- Sensitivity:** 100 dB SPL, 1 Watt @ 1 meter
- Coverage Angles:** 90° Horizontal, 45° Vertical
- Nominal Impedance:** 8Ω
- Horn Driver Protection:** Yes
- Inputs/Outputs:** Two SPEAKON™ & 1/4" Connectors
- Woofer Enclosure Type:** Vented Box
- Enclosure Covering:** Black Duratuff II™
- Dim/Wt:** 20"W x 14"D x 26"H, 47 lbs.
- Warranty:** One Year
- Options:** Cover: **CVS832**, Stands: **SS20** or **SS30**

For your records, you may wish to record the following information.

Serial No. _____ Invoice Date _____



12340 World Trade Drive, San Diego, CA 92128
 (619) 487-1600 (800) 854-2235
 www.carvin.com