

# C152

## Soft Serve Freezer

Single Flavor

### Features

Offer all the popular soft serve variations, from low or non-fat ice creams to custards, yogurt, and sorbet.

### Freezing Cylinder

One, 1.5 quart (1.4 liter).

### Mix Hopper

One, 8 quart (7.6 liter). Separate hopper refrigeration (SHR) maintains mix below 41°F (5°C) in Auto and Standby modes.

### Indicator Lights

The Mix Low and Mix Out light alerts the operator to add mix. An audible alarm may be enabled to sound when mix is low.

### Electronic Controls

Softech™ is our exclusive microprocessor-based master control that regulates refrigeration by measuring product viscosity to maintain consistent quality.


### Standby

During long no-use periods, the Standby feature maintains safe product temperatures in the mix hopper and freezing cylinder.

### Door Interlock System

Protects the operator from injury as the beater will not operate without the dispensing door in place.



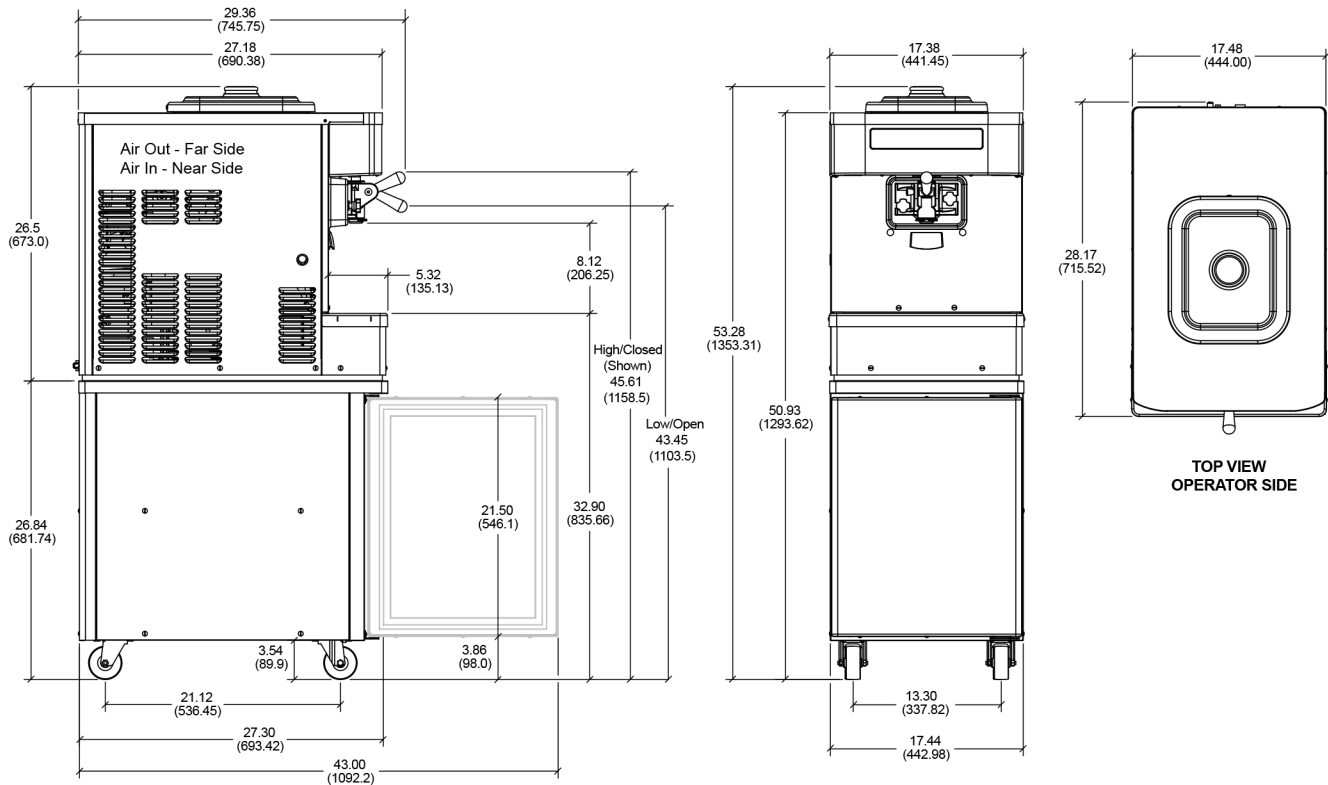

FIGURES IN BRACKETS INDICATE MILLIMETERS EQUIVALENT TO DECIMAL DIMENSIONS (PLUS OR MINUS 1/16 INCH [1.5MM]).

Weights	lbs.	kgs.
Net	207	94.0
Crated	238	108.0

\*For reference only

	cu. ft.	cu. m.
Volume	21.1	0.60

Dimensions	in.	mm.
Width	17-31/64	444.0
Depth	29-23/64	745.75
Height	26-1/2	673.0

\*Mounted on standard casters

Electrical	Total Amps	Supplied with NEMACord
115/60/1 Air	16.0	5-20P
208-230/60/1 Air	10.2	6-15P
220-240/50/1 Air	7.8	----

This unit may be manufactured with other electrical characteristics and may have additional regulatory agency approvals. Consult the local Taylor distributor for other electrical characteristics and agency approvals based on specific electrical and country requirements. **(For exact electrical information, approval marks, and refrigerant, always refer to the data label of the unit.)**

**Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.**

**Bidding Specs**

Electrical: Volt \_\_\_\_\_ Hz \_\_\_\_\_ ph \_\_\_\_\_  
 Neutral: Yes No      Cooling: Air Water NA

**Options:** \_\_\_\_\_

All options may not be available in combination with others or with all electrical or cooling configurations. Please consult your local Taylor distributor.

**Specifications**

**Electrical**

One dedicated electrical connection is required. See the Electrical chart for the proper electrical requirements. Manufactured to be cord-connected. Consult the international Taylor distributor for cord and receptacle specifications for 50 Hz equipment.

**Beater Motor**

One, 0.5 HP.

**Refrigeration System**

One, 2,600 BTU/hr. R449A. Separate Hopper Refrigeration (SHR), one, 400 BTU/hr. R134A. (BTUs may vary based on application.)

**Air-Cooled**

Minimum 4" (102 mm) on both sides. Minimum air clearances must be met to ensure adequate airflow for optimum performance.

**Options**

- 4" Legs (must install skirt on right side of unit to prevent recirculation of warm air).

Authorized Taylor Distributor

