

**Dimensions and illustrations are approximate and for reference only*

Sequence® Alpha Primer Series - Model 3200PRM15

The Alpha Primer series integrates a basket-type pre-filter and self-priming capabilities into one efficient package for trouble-free operation. The integrated strainer basket on all primer units helps protect the internal rotating parts of the pump from damage due to external debris being pulled into the pump.




5 YEAR LIMITED WARRANTY



8 FOOT CORD SET





TEFC FAN COOLED MOTOR

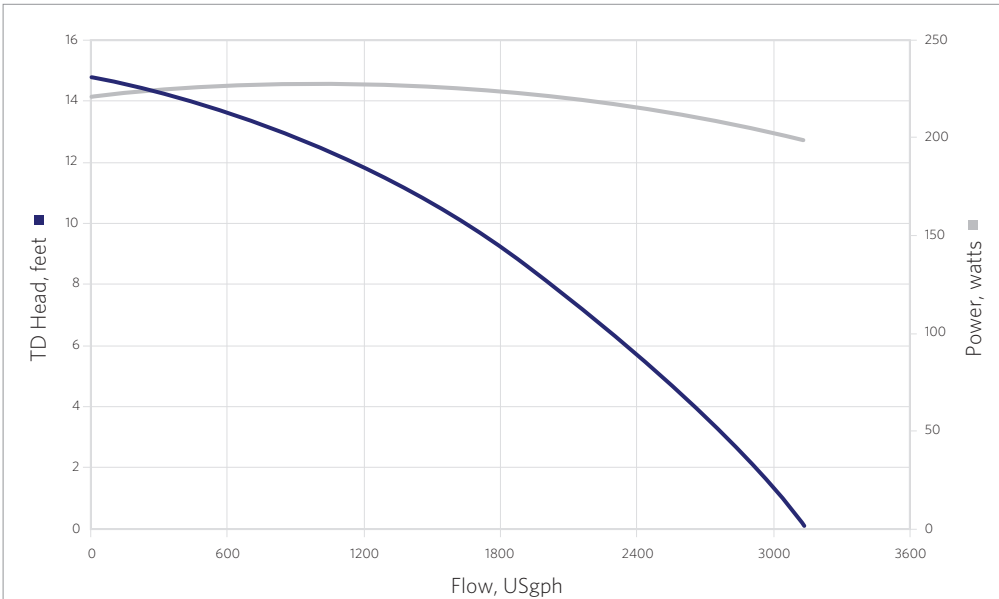

Flow At Total Dynamic Head	4'	8'	10'	12'	15'
GPM	44	34	27	20	0
GPH	2640	2040	1620	1200	0

MODEL	3200PRM15
INLET	2"
DISCHARGE	2"
MAX FLOW (gph)	3200
MAX HEAD (feet)	15'
MAX POWER (watts)	228
MAX CURRENT (amps)	2.68
@ (volts)	120
MOTOR HP	½, ⅓
MOTOR TYPE	56Y
MOTOR ENCLOSURE	TEFC



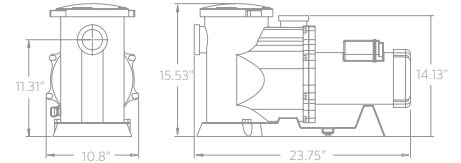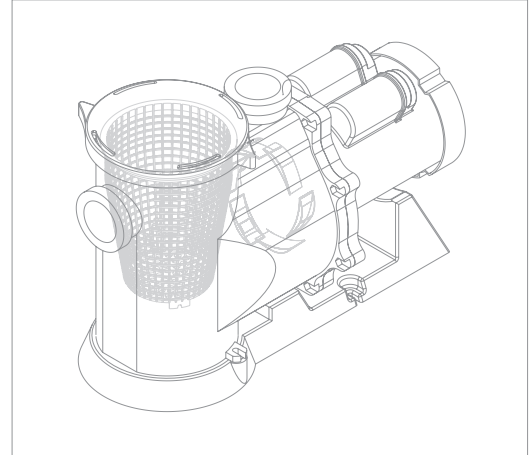

*Dimensions and illustrations are approximate and for reference only

Sequence® Alpha Primer Series - Model 5000PRM18

The Alpha Primer series integrates a basket-type pre-filter and self-priming capabilities into one efficient package for trouble-free operation. The integrated strainer basket on all primer units helps protect the internal rotating parts of the pump from damage due to external debris being pulled into the pump.




5 YEAR LIMITED WARRANTY



8 FOOT CORD SET





TEFC FAN COOLED MOTOR

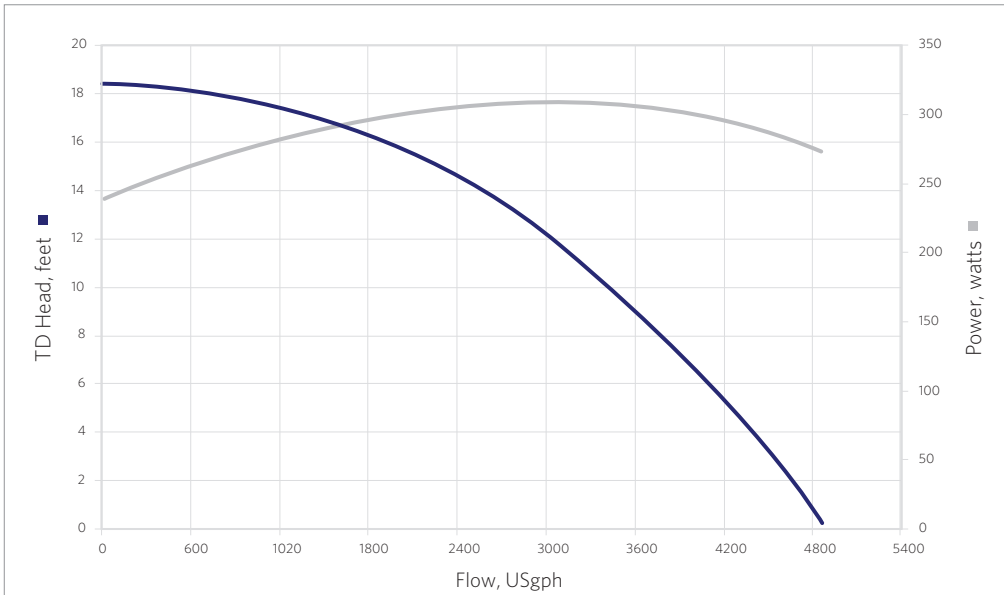

Flow At Total Dynamic Head	4'	8'	12'	16'	20'
GPM	73	63	51	32	0
GPH	4380	3780	3060	1920	0

MODEL	5000PRM18
INLET	2"
DISCHARGE	2"
MAX FLOW (gph)	5000
MAX HEAD (feet)	18'
MAX POWER (watts)	310
MAX CURRENT (amps)	3.27
@ (volts)	120
MOTOR HP	½, ⅓
MOTOR TYPE	56Y
MOTOR ENCLOSURE	TEFC



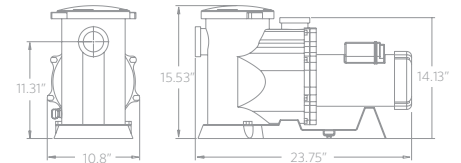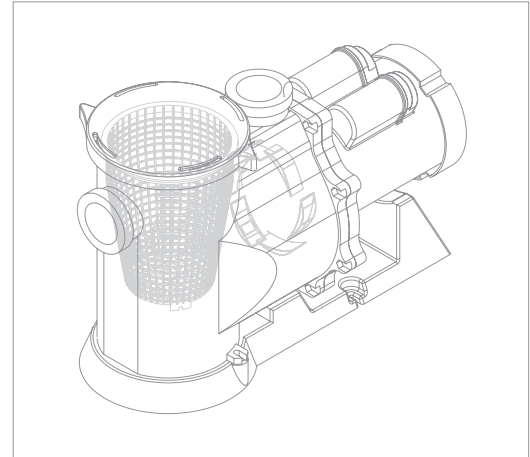

**Dimensions and illustrations are approximate and for reference only*

Sequence® Alpha Primer Series - Model 6800PRM19

The Alpha Primer series integrates a basket-type pre-filter and self-priming capabilities into one efficient package for trouble-free operation. The integrated strainer basket on all primer units helps protect the internal rotating parts of the pump from damage due to external debris being pulled into the pump.




5 YEAR LIMITED WARRANTY



8 FOOT CORD SET





TEFC FAN COOLED MOTOR

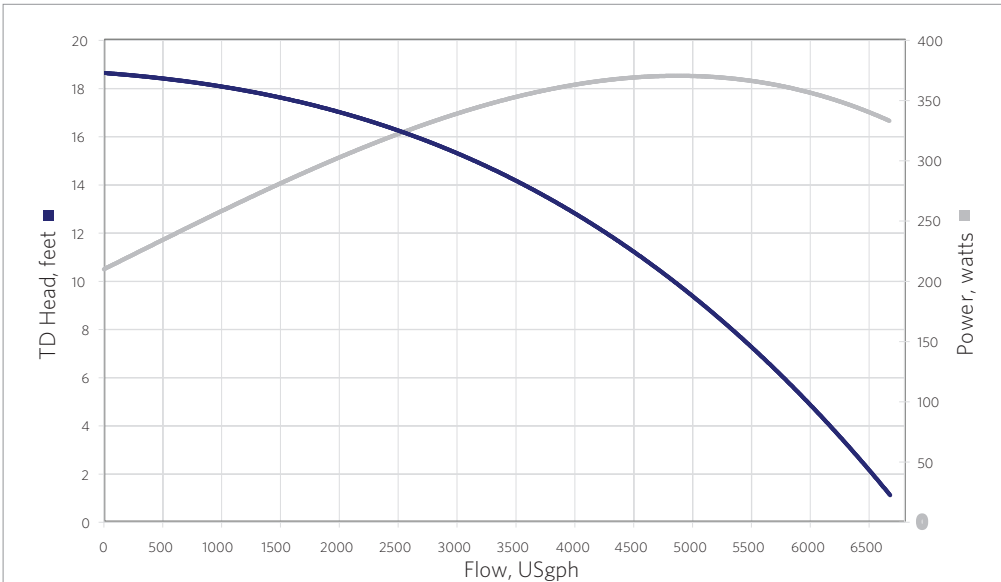

Flow At Total Dynamic Head	4'	8'	12'	16'	20'
GPM	103	89	70	45	0
GPH	6180	5340	4200	2700	0

MODEL	6800PRM19
INLET	2"
DISCHARGE	2"
MAX FLOW (gph)	6800
MAX HEAD (feet)	19'
MAX POWER (watts)	369
MAX CURRENT (amps)	3.93
@ (volts)	115
MOTOR HP	½, ⅓
MOTOR TYPE	56Y
MOTOR ENCLOSURE	TEFC



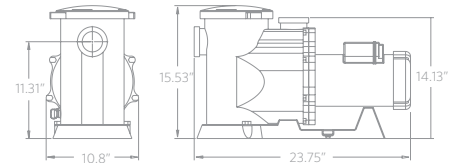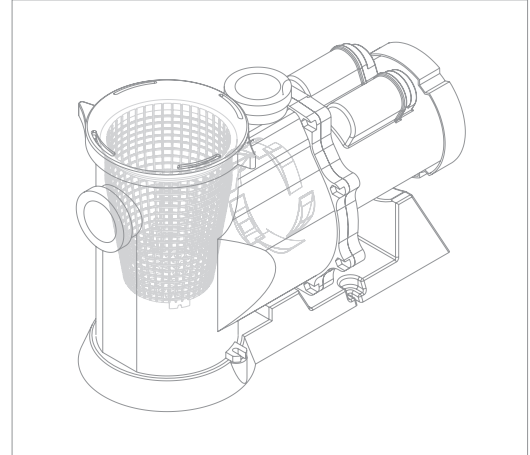

**Dimensions and illustrations are approximate and for reference only*

Sequence® Alpha Primer Series - Model 7800PRM24

The Alpha Primer series integrates a basket-type pre-filter and self-priming capabilities into one efficient package for trouble-free operation. The integrated strainer basket on all primer units helps protect the internal rotating parts of the pump from damage due to external debris being pulled into the pump.




5 YEAR LIMITED WARRANTY



8 FOOT CORD SET





TEFC FAN COOLED MOTOR

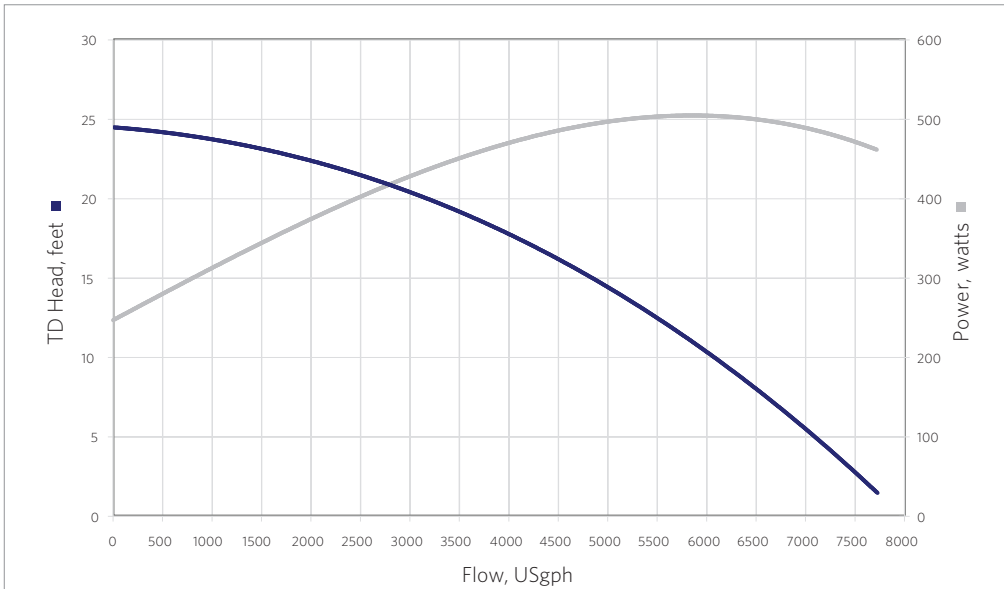

Flow At Total Dynamic Head	4'	8'	12'	16'	20'
GPM	121	108	94	75	54
GPH	7260	6480	5640	4500	3240

MODEL	7800PRM24
INLET	2"
DISCHARGE	2"
MAX FLOW (gph)	7800
MAX HEAD (feet)	24'
MAX POWER (watts)	504
MAX CURRENT (amps)	5.02
@ (volts)	115
MOTOR HP	½, ⅓
MOTOR TYPE	56Y
MOTOR ENCLOSURE	TEFC



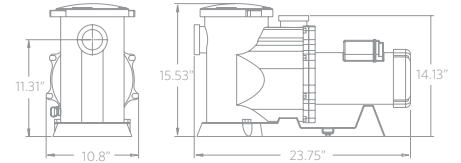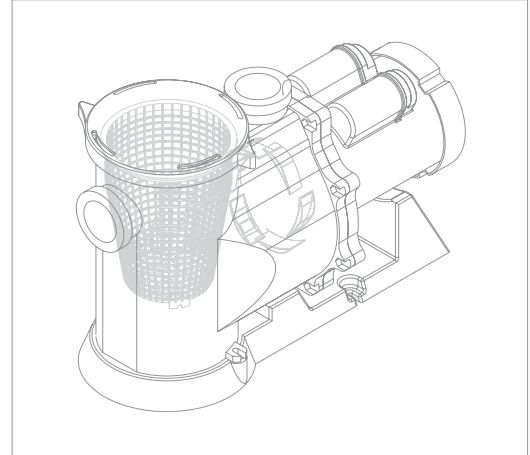

*Dimensions and illustrations are approximate and for reference only

Sequence® High-Speed Alpha Primer Series - Model 6000PRM60

The Alpha Primer series integrates a basket-type pre-filter and self-priming capabilities into one efficient package for trouble-free operation. The integrated strainer basket on all primer units helps protect the internal rotating parts of the pump from damage due to external debris being pulled into the pump.




5 YEAR LIMITED WARRANTY



8 FOOT CORD SET



ODP MOTOR

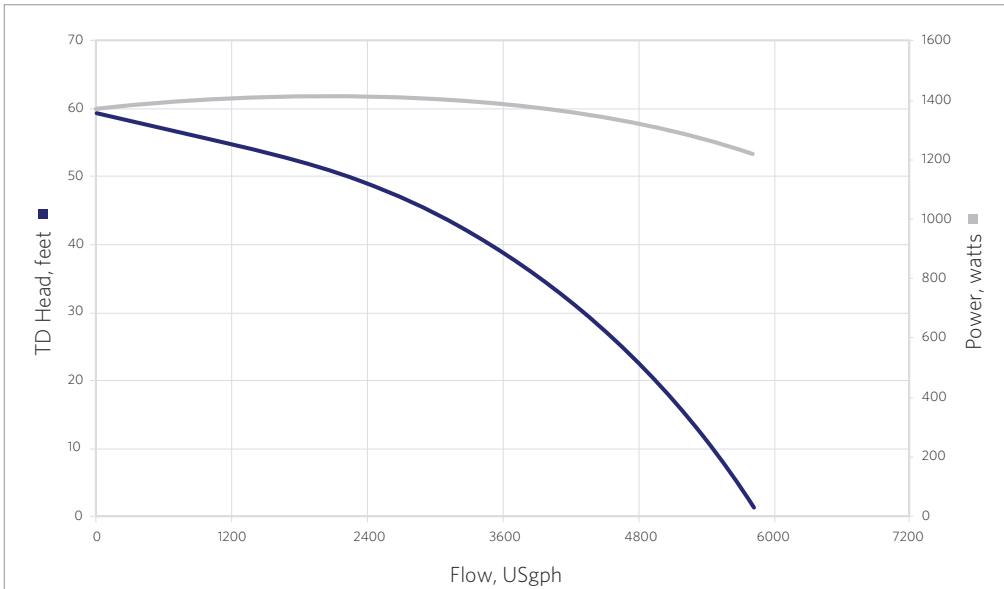

Flow At Total Dynamic Head	5'	15'	30'	45'	60'
GPM	92	88	72	50	0
GPH	5520	5280	4320	3000	0

MODEL	6000PRM60
INLET	2"
DISCHARGE	2"
MAX FLOW (gph)	6000
MAX HEAD (feet)	60'
MAX POWER (watts)	1418
MAX CURRENT (amps)	8.74
@ (volts)	230
MOTOR HP	2
MOTOR TYPE	56Y
MOTOR ENCLOSURE	ODP

