

Quick & Easy Newel Post Fastener

SKU / Product Number

- 512-6300800
- 512-6351mk800


Directions

Step 1: Cut post to specific length. Locate center of post on floor, and pre-drill all holes.

Important: When drilling post, drill 1-1/2" hole first. Lag must be installed into solid bracing.

Step 2: Screw lag into floor and bend top plumb.

Step 3: Place post over lag. From 1-1/2" access hole, insert curved washer and nut. Torque down hard, using a 3/4" box end wrench. Plumb post if necessary by cutting bottom at a slight angle and reapplying. Stress post in all directions and re-tighten with torque. Glue hole, tap in plug, and sand flat.

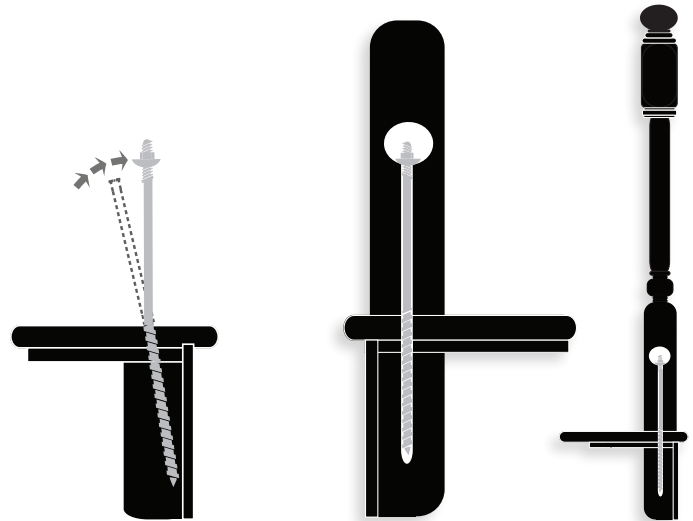

Benefits and Features

- Quickest and most effective way to install newel posts. Minimize your installation time.
- Rapid drilling for quick installation.
- Self drilling with no clogging.
- Installs with common wood working tools
- 512-6300800 includes the Hanger (table) bolt, flange nut, and curved washer. 512-6351mk800 also includes one maple and one oak plug (1/4" thick).

Learn More

To learn more about TCH please contact us Toll-Free at 1-800-465-6281 to speak to a qualified customer service representative.

Please visit our website for a full listing of all TCH products at: www.tchweb.com

BUFFALO	CALGARY	DALLAS	MONTRÉAL	TORONTO
1370 William Street Buffalo, NY U.S.A. 14206	1135-45th avenue NE Calgary, AB, Canada T2E 2P2	10552 King William Dr. Dallas, TX U.S.A. 75220	16757 Boul. Hymus Kirkland, QC Canada H9H 3L4	40 Emblem Court Toronto, ON Canada M1S 1B1