


# Water Filtration



## FS5010

Inline Water Filtration System for Standard Water Use

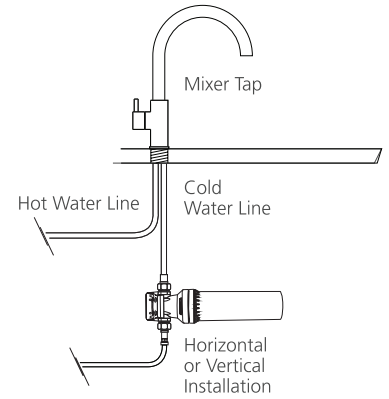

### Specifications /

<b>Micron rating</b>	1 micron with limescale reduction
<b>Maximum flow rate</b>	0 - 8L per minute
<b>Temperature rating (min / max)</b>	2°C - 38°C
<b>Capacity</b>	56,700 litres or 1 year, whichever comes sooner †
<b>System connection required</b>	1/2" bsp
<b>Water Pressure</b>	70 - 500 kPa (can be installed with a pressure limiting valve)
<b>Installation</b>	Vertical or horizontal
<b>Space required</b> <i>(allows for cartridge replacement)</i>	Vertical installation: 460 mm height, 225 mm width Horizontal installation: 225 mm height, 460 mm width
<b>Carton size</b>	333 x 189 x 102 mm
<b>Product weight</b>	2 kg
<b>Replacement cartridge model</b>	FR5910
<b>Warranty</b>	6 years (refer to oliveri.com.au)
<b>Maintenance and care instructions</b>	Filter cartridge replacement required after 56,700 litres or annually. Filter change alarm monitor included.

### Inclusions /

- Oliveri inline filter cartridge (FR5910)**
- Filter change alarm monitor**
- Dual check non-return valve
- Stainless braided pex hose 550mm
- Hex nipple adaptor
- Head assembly with mounting bracket
- Mounting screws and plumbers tape
- Installation instructions

### Matching accessories /

