



**L BAND 8 WAY PASSIVE COMBINER/SPLITTER**

**L-SPCO8/PN-DC1**

**Description**

The Global Professional L BAND PASSIVE 8 way Combiner/Splitter has been designed to combine or split the L band from a typical satellite system. The unit can be used in either configuration as splitter or combiner.


Port one will allow DC to pass through from receiver port one through to the combined output port. All other ports are DC blocked.



**Specifications**

Frequency Pass	950MHz - 2150MHz
L Band Through Loss 950 –2150MHz	11dB ± 1dB
Port to Port Isolation	+20dB
Return Loss	+15dB
DC Passing	Port 1 Only
MAX DC Current	1 AMP
Connectors	'N' type as standard 50 Ohm
Dimensions	223mm x 98.5mm x 26mm
Mounting Dimensions	212.5mm x 88.5mm
Weight	1200 grams
RoSH/WEEE Compliant	YES

LBand

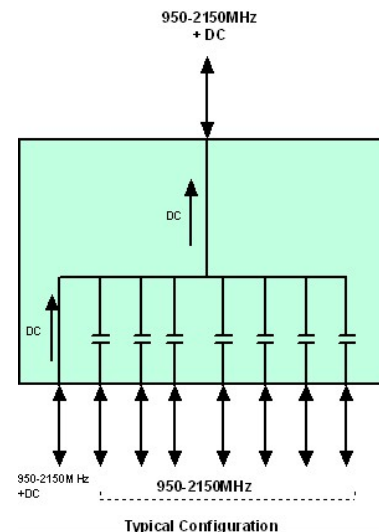

**Other Connector configurations available upon request.**