

Assembly Instructions

For Adjustable Fixtures

A8

Page 1 of 2

Components

- | | |
|-----------------|-----------------|
| A Canopy | E Canopy pipe |
| B Clutch | F Fixture pipe |
| C Clutch sleeve | G Fixture wires |
| D Set screw | |


To Assemble

1. Carefully unpack the fixture from the carton.
2. Thread the wires from the fixture pipe (F) into and through the canopy pipe (E) up through the canopy (A). Depending on the fixture, the canopy pipe may be the larger or the smaller diameter of the two.
3. Unscrew the clutch (B) from the larger diameter pipe (either E or F); slide it across the wires and onto the smaller diameter pipe (either E or F). Follow this with the clutch sleeve (C), so it nests in the clutch (B).
4. Slide the smaller pipe (E or F) as far as necessary to give you the total length of the fixture which you desire. Be careful not to scratch the pipe surfaces and to pull excess wire up through the canopy (A). **There must be a minimum 1-1/2" of inner pipe inside the outer pipe.** Hand-tighten the clutch to temporarily hold this adjustment. **Tighten the set screw (D) firmly with hex wrench provided.**

Important: To ensure full connection strength, be sure the tapered end of the plastic clutch sleeve is oriented toward the clutch when assembled and securely tighten set screw (Figure 2).


5. **Stop.** Please see installation instructions on other side.

Note: If your fixture has more than one set of pipes or stems in the canopy you will need to level the fixture. While **always** leaving one clutch firmly locked with the set screw, loosen the other(s). Raise or lower the pipe(s) in the other clutch to obtain plum and level and then tighten the set screw(s).

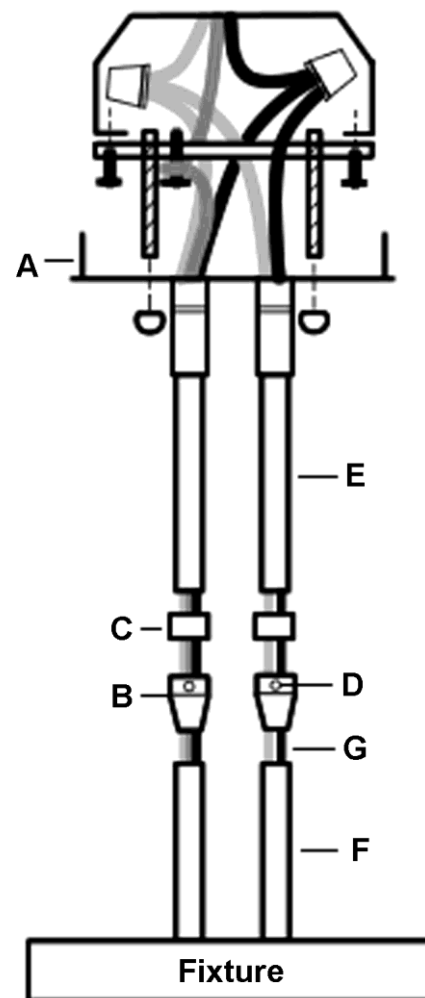

(Figure 1)

This illustration represents a typical two-stem fixture. Single- and four-stem fixtures follow the same procedure.

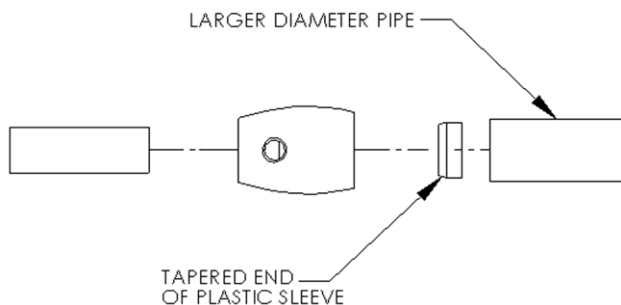

(Figure 2)

(continued)

Assembly Instructions

For Adjustable Fixtures

A8

Page 2 of 2

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician.

This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

For fixtures requiring assembly, please refer to assembly instructions before installation.

Component Parts


- | | |
|---|--|
| A Canopy | G 8-32 Threaded studs |
| B Electric box machine screws (not provided) | H 8-32 Knurled balls or 8-32 Threaded Knobs
(Depending on fixture purchased) |
| C Black wires | I Wire Nuts or Connections (not provided) |
| D Ground wires | J Ground screw |
| E White wires | |
| F Universal Round Cross Bar | |

To Install

Caution: Be sure power is off at the main breaker box prior to installation

1. Thread studs (G) through appropriate holes in the crossbar (F) to match hole centers on canopy (A). Move ground screw (J) to another available threaded hole if necessary.
2. Using two machine screws (B, not provided), fasten the crossbar (F) to the electric box using outer oval slots to orient fixture to desired hanging position.
Note: A new electric box comes with screws. When replacing a fixture, retain the existing screws for use with the new fixture.
3. Using suitable wire connectors (I) (not provided) connect fixture wires to supply wires (white to white and black to black or white to ribbed side of the fixture's cord, and black to the smooth side). Run a pigtail lead from crossbar ground screw (A) to the junction box and connect all ground wires (bare copper or green to bare copper or green).
Caution: Make sure wire connectors are twisted on securely, and no bare wire is exposed.
4. Slide fixture canopy (A) with fixture attached, over threaded studs (G) and push firmly to ceiling making sure that no wires are pinched between fixture canopy and ceiling. Fasten with the knurled balls (H). Be sure studs (G) are fully seated in the knurled balls (H).
5. Check fixture for height and level (see assembly instructions).
6. Install light bulb(s) (not included).
7. Install Glass
8. Restore electricity at main breaker box.

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

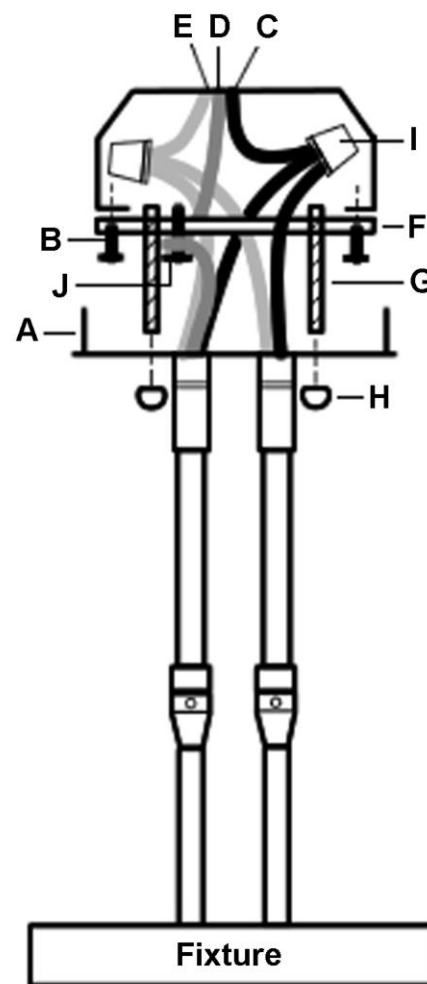

(Figure 3)

* Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.

Assembly & Installation Instructions

Brindille Single Pendant 18-667

A283

Page 1 of 2

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician.

This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

Please Note: After installation extra hardware and accessories are possible due to our kits are used on multiple products and options.


To Complete Fixture Assembly (Figures 1 & 2)

Component Parts


A	Fixture Pipe	F	Knurled Ball (2)
B	Canopy	G	Canopy Pipe
C	Crossbar	H	Plastic Clutch Sleeve
D	Ground Screw	I	Clutch
E	Threaded Stud (2)	J	Set Screw

Caution: Be sure power is off at the main breaker box prior to installation.

1. Thread the wires from the fixture pipe (A) into and through the canopy pipe (G) up through the canopy (B).
2. Unscrew the clutch (I) from the canopy pipe (G); slide it across the wires and onto the fixture pipe (A). Follow this with the plastic clutch sleeve (H), oriented so the tapered end of the clutch sleeve nests in the clutch.
3. Slide the canopy pipe (G) as far as necessary to give you the total length of the fixture which you desire. Be careful not to scratch the pipe surfaces and to pull excess wire up through the canopy pipe (G). Screw clutch (I) onto canopy pipe (G). There must be a minimum 1-1/2" of inner pipe inside the outer pipe. Hand-tighten the clutch to temporarily hold this adjustment. Tighten set screw (J) firmly using hex wrench provided. **Important:** To ensure full connection strength, be sure the tapered end of the plastic clutch sleeve is oriented toward the clutch when assembled and securely tighten set screw (Figure 2).
4. Thread studs (E) through appropriate holes in crossbar (C) to match holes in canopy (B).
5. Using two machine screws (not provided), fasten the crossbar (C) to the electric box. **Note:** A new electric box comes with screws. When replacing a fixture, retain the existing screws for use with the new fixture.
6. Using suitable wire connectors (not provided) connect fixture wires to supply (white to white or ribbed and black to black or smooth). Run a pigtail lead from crossbar ground screw (D) to the junction box and connect all ground wires (bare copper or green to bare copper or green). **Caution:** Make sure wire connectors are twisted on securely, and no bare wire is exposed.
7. Slide canopy (B) over threaded studs (E) and push firmly to ceiling, making sure that no wires are pinched between fixture canopy and ceiling. Fasten with knurled balls (F). Be sure studs are fully seated in the knurled balls.
8. Refer instructions following to install glass.

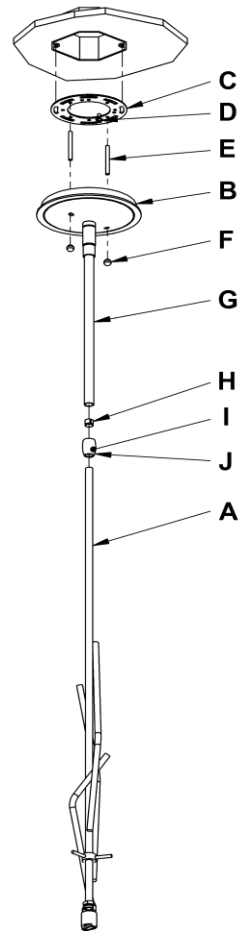

(Figure 1)

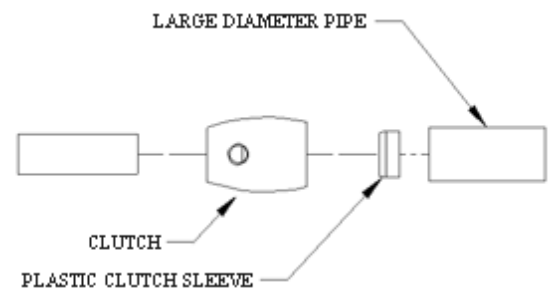

(Figure 2)

Assembly & Installation Instructions

Brindille Single Pendant 18-667

A283


Page 2 of 2

To Install Glass (Figure 3)

Component Parts

- K Barrel Knobs (3)
- L Bulb (Included)
- M Bulb Shield
- N Glass
- O Socket
- P Spider

1. Remove barrel knobs (K) from spider (P) and set them aside.
2. Install light bulb (L). *Be careful not to touch bulb with bare hands; oil from the hands will dramatically reduce bulb life.*
3. Thread bulb shield (M) over socket.
4. Raise glass (N) and align holes with spider (P). Fasten glass (N) to spider (P) using barrel knobs (K).
5. Restore electricity at main breaker.

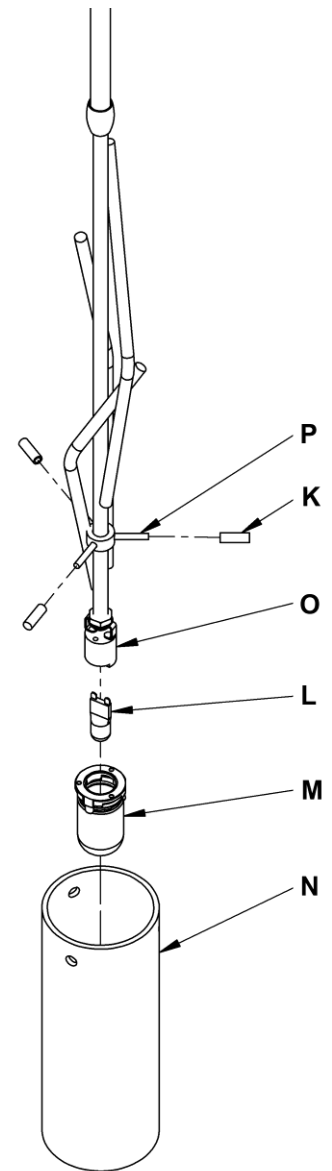

(Figure 3)


If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture

Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.

ASSEMBLY & INSTALLATION INSTRUCTIONS

A716

Brindille Mini Pendant 186670

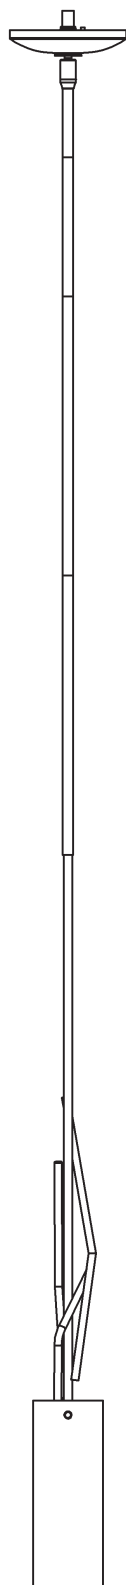

HUBBARDTON FORGE.

MODERN AMERICAN BLACKSMITHS | FINE, HAND CRAFTED LIGHTING
CASTLETON, VERMONT USA | HUBBARDTONFORGE.COM

48297

1 OF 5

Component Parts

- A Fixture**
- B Fixture Coupling**
- C Crossbar**
- D Jam Nut**
- E Threaded Nipple**
- F Ground Screw**
- G Canopy Ring**
- H Canopy**
- I Swivel**
- J 3" Fixture Pipe (1)**
- K 6" Fixture Pipe (1)**
- L 12" Fixture Pipe (2)**
- M Stem Nipple (4)**
- N Socket**
- O Bulb**
- P Barrel Knobs (3)**
- Q Bulb Shield**
- R Glass**
- S Spider**



ASSEMBLY & INSTALLATION INSTRUCTIONS

A716

Brindille Mini Pendant 186670

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

Please Note: After installation extra hardware and accessories are possible due to our kits are used on multiple products and options.

To Install Fixture (Figure 1) on following page

CAUTION: BE SURE POWER IS OFF AT THE MAIN BREAKER BOX PRIOR TO INSTALLATION.

1. Carefully unpack fixture (A) from the carton.
2. Thread jam nut (D) and crossbar (C) onto threaded nipple (E) with ground screw (F) facing towards swivel (I); leave both parts loose.
3. Using two machine screws (not provided), temporarily fasten crossbar (C) to the electric box.

NOTE: A NEW ELECTRIC BOX COMES WITH SCREWS. WHEN REPLACING A FIXTURE, RETAIN THE EXISTING SCREWS FOR USE WITH THE NEW FIXTURE.

4. Adjust the length of threaded nipple (E) in crossbar (C) so that canopy ring (G) will hold canopy (H) against the ceiling with no threads showing for best appearance. When the correct adjustment is established, tighten jam nut (D) against crossbar (C) to secure the adjustment.
5. Remove crossbar (C) from the electrical box and proceed with the assembly instructions.
6. Locate fixture pipes (J, K, L), fixture (A) and stem nipples (M). Nipples (M) can be found in the kit bag.
7. Provided are multiple fixture pipes in three different lengths. Choose the combination that will achieve the overall height desired. Refer to the table below to determine the pipes required to reach the desired overall height. Once you have determined the components necessary, feed the wires that exit fixture coupling (B) through the individual components and thread pipes and couplings together. Wires will slip easier through loose components than through pipes and couplings that are pre-assembled. Once wires are run, apply thread locking compound to all the connection points and assemble the pipes and nipples.

		Overall Height of Fixture											
		34	37	40	43	46	49	52	55	58	61	64	67
# of Pipes Required	3" Pipe (J)		1		1		1		1		1		1
	6" Pipe (K)			1	1			1	1			1	1
	12" Pipe (L)					1	1	1	1	2	2	2	2

NOTE: APPLICATION OF THE THREAD LOCKING COMPOUND IS NECESSARY TO PREVENT THE PIPE FROM LOOSENING DURING REGULAR MAINTENANCE AND CLEANING OF THE FIXTURE. BE CERTAIN TO APPLY THE COMPOUND.

8. Carefully slide canopy ring (G) and canopy (H) over wires and fixture pipes (J, K, L) until they rest on fixture (A).
9. Slip wires from the fixture (A) through assembled swivel (I) and thread swivel onto final pipe. It may be necessary to remove a nipple (M) for this to work on shorter overall fixture heights.
10. Refer to instructions on next page to continue installation.



HUBBARDTON FORGE.

MODERN AMERICAN BLACKSMITHS | FINE, HAND CRAFTED LIGHTING
CASTLETON, VERMONT USA | HUBBARDTONFORGE.COM

48297

3 OF 5

ASSEMBLY & INSTALLATION INSTRUCTIONS

A716


Brindille Mini Pendant 186670

11. Using two machine screws (not provided), fasten crossbar (C) to the electric box.
12. Using suitable wire connectors (not provided) connect fixture wires to supply (white/ribbed to white and black/smooth to black). Attach a pigtail lead to crossbar ground screw (F). Hold canopy (H) close, connect all ground wires (bare copper or green to bare copper or green).

CAUTION: MAKE SURE WIRE CONNECTORS ARE TWISTED ON SECURELY, AND NO BARE WIRE IS EXPOSED.

13. Slide canopy (H) against ceiling, and secure with canopy ring (G).

CAUTION: BE SURE NO WIRES ARE PINCHED BETWEEN CANOPY (H) AND THE CEILING.

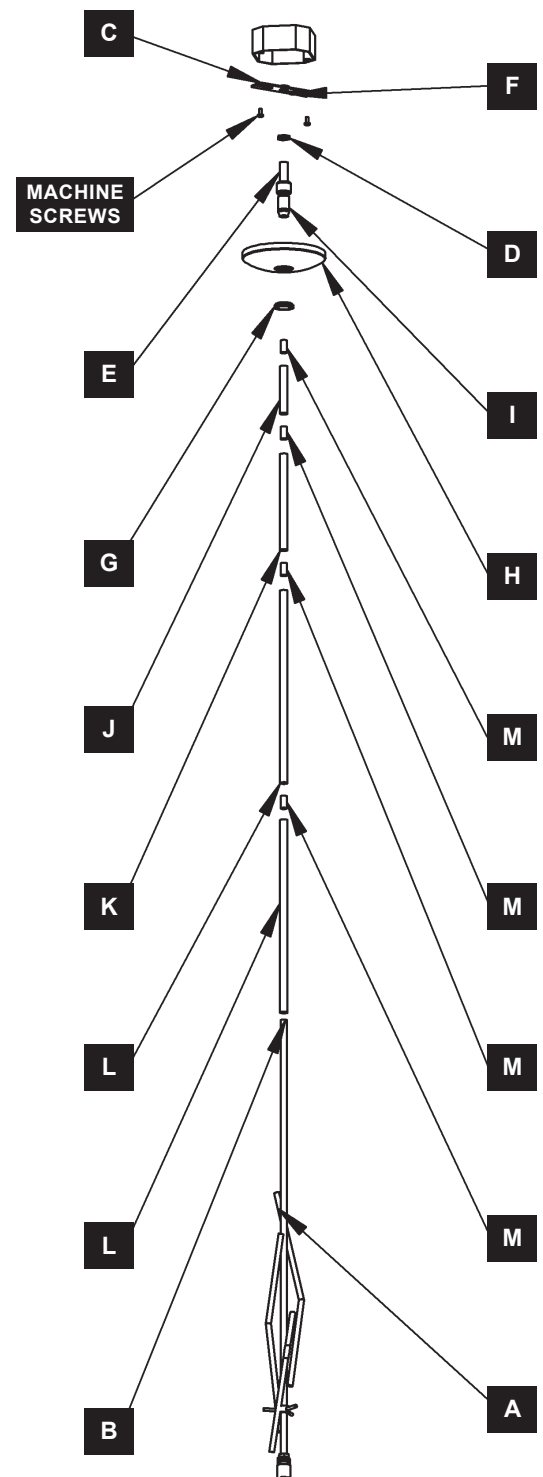

(Figure 1)



HUBBARDTON FORGE.

MODERN AMERICAN BLACKSMITHS | FINE, HAND CRAFTED LIGHTING
CASTLETON, VERMONT USA | HUBBARDTONFORGE.COM

48297

4 OF 5


ASSEMBLY & INSTALLATION INSTRUCTIONS

A716

Brindille Mini Pendant 186670

To Install Glass (Figure 2)

1. Remove barrel knobs (P) from spider (S) and set them aside.
2. Install light bulb (O). Be careful not to touch bulb with bare hands; oil from the hands will dramatically reduce bulb life.
3. Thread bulb shield (Q) over socket. Note: If using an LED bulb do not install shield.
4. Raise glass (R) and align holes with spider (S). Fasten glass (R) to spider (S) using barrel knobs (P).
5. Restore electricity at main breaker

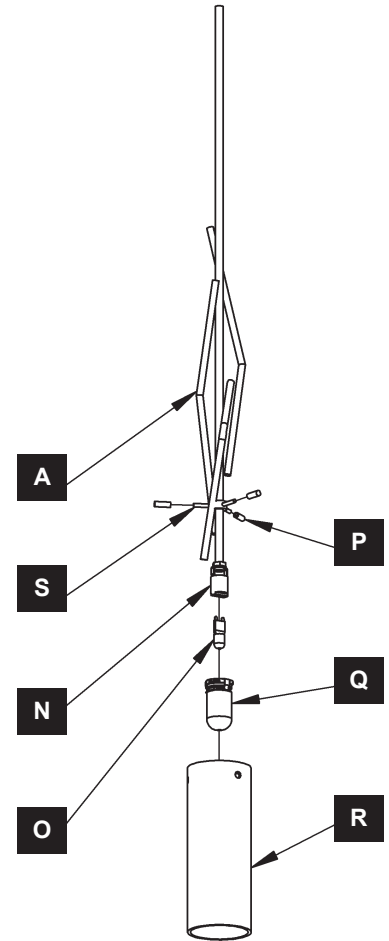

(Figure 2)

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

**Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.*



HUBBARDTON FORGE.

MODERN AMERICAN BLACKSMITHS | FINE, HAND CRAFTED LIGHTING
CASTLETON, VERMONT USA | HUBBARDTONFORGE.COM

48297

5 OF 5