

Unique and versatile, the fan head of the Jarold Direcional ceiling fan can be infinitely positioned in a 180-degree arc, forward and reverse, to provide maximum, directional airflow. The Jarold can be hung in small, awkward spaces or in front of HVAC ducts to make more efficient the heating, ventilation or air conditioning of any room. Constructed of cast aluminum, heavy spun and stamped steel, the Jarold Direcional carries a limited lifetime warranty.

























## JAROLD **DIRECIONAL**

FINISH AND I	BLADE (	OPTIONS
--------------	---------	---------

SKU#	JD-XXXXXX-XX (Model+Finish+Blade)	
Standard Finishes	Black Bronzette Brushed Nickel	BK BZZT BN
Special Order	Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Copper Polished Chrome Damp Brushed Nickel Damp Gloss White	BRBR BRCP PB CR CP CRDAMP BNDAMP WH
Fan Blade	Solid Mahogany Wood Blade Metal Blade	WD MTL
TECHNICAL SPECS		
Fan Weight	7 lbs	

Fan Weight	7 lbs	
Voltage	110 or 220	
Motor Type	AC	
Oscillation	No	
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30 centimeters: 13, 25, 51, 76	
Downrod Diameter	.75 inch	
Overall Drop	Metal Blades:	13 inches / 33 cm + downrod length
Overall Dron		

Overall Drop	Wood Blades:	16 inches / 41 cm + downrod length
Environment	Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.	
Ambience	Soothing White	Noise

Safety Certification	UL / CUL
Warranty	Limited Lifetime

Overall Drop

## **NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA**

Fan Head Options	Solid Mahogany Wood	Metal with Guard
Fan Diameter	16 inches / 41 cm	13 inches / 33 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Decorative Cage or Safety Cage with tight tines
RPM (Low / High)	955 / 1318	615 / 1149
CFM (Low / High)	1701 / 2368	800 / 1162
Watts (High)	46.77	48.39
CFM/Watt (High)	50.63	24.01
Blade Pitch	19°	31°

#### **STANDARD EQUIPMENT**

One downrod of 10 inches / 25 cm

Flat ceiling canopy (Not compatible with vaulted ceiling canopy) Decora-style, 3-speed wall control in white



#### Standard Finishes





Brushed Nickel

Brushed Brass

Polished **Brass** 

**Special Order Finishes** 

Brushed

Polished Copper

Polished Chrome


Polished Chrome Damp

Brushed Nickel Damp

Gloss White

# Jarold Direcional

### TECHNICAL SPECIFICATIONS

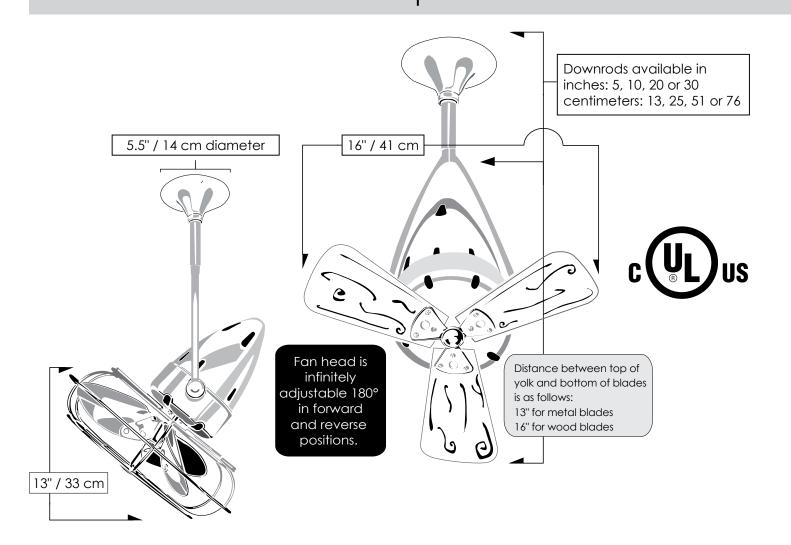

CEILING PITCH TABLE	
0/12	0 degrees
1/12	4.76 degrees
2/12	9.46 degrees
3/12	14.04 degrees
4/12	18.43 degrees
5/12	22.62 degrees
6/12	26.57 degrees
7/12	30.26 degrees
8/12	33.69 degrees
9/12	36.87 degrees
10/12	39.81 degrees
11/12	42.51 degrees

CEILING HEIGHT / DOWNROD Table	
Ceiling Height	Downrod Lengths Field cuttable. Non-threaded
10 ft or less	5 inches / 13 cm Use safety cages if applicable
10 -12 feet	10 inches / 25 cm
13 feet	20 inches / 51 cm
14 feet	30 inches / 76 cm

#### Matthews Fan Company

1881 Industrial Drive Libertyville, IL 60048 Tele: 847.680.9043 Fax: 847.680.8140 www.matthewsfanco.com

