

Nodes Pendant

KP1001, KP1011, KP1141 | 1.0

GENERATION LIGHTING PENDANTS

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.


This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


Use minimum 90°C supply conductors.

SAVE THESE INSTRUCTIONS!

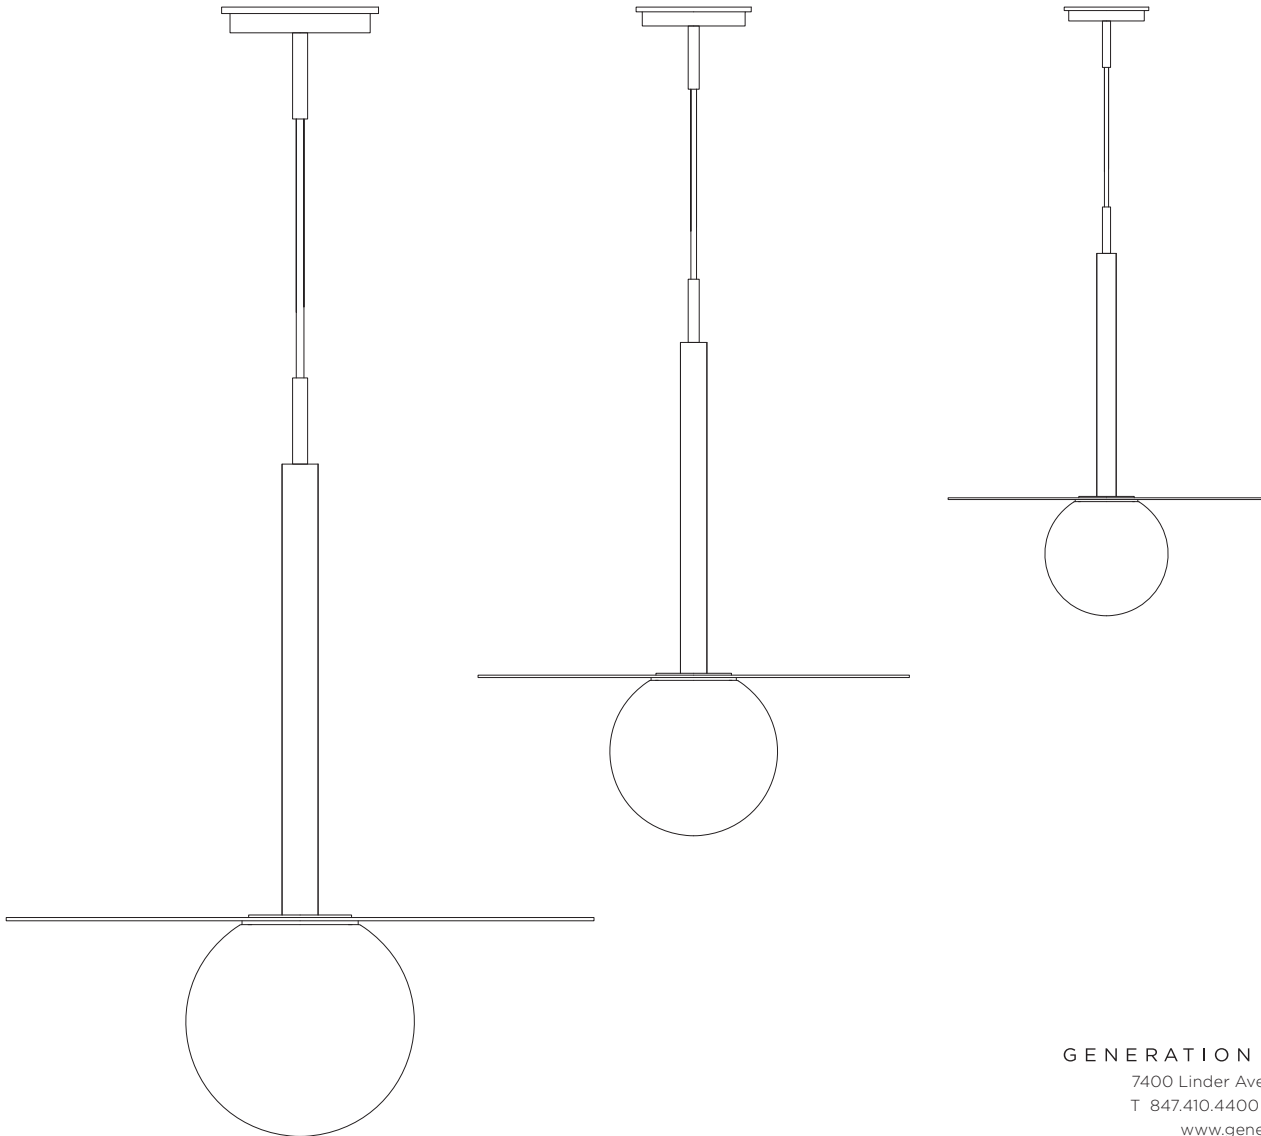

GENERATION LIGHTING
7400 Linder Ave., Skokie, IL 60077
T 847.410.4400 | F 847.410.4500
www.generationlighting.com

Install the Fixture

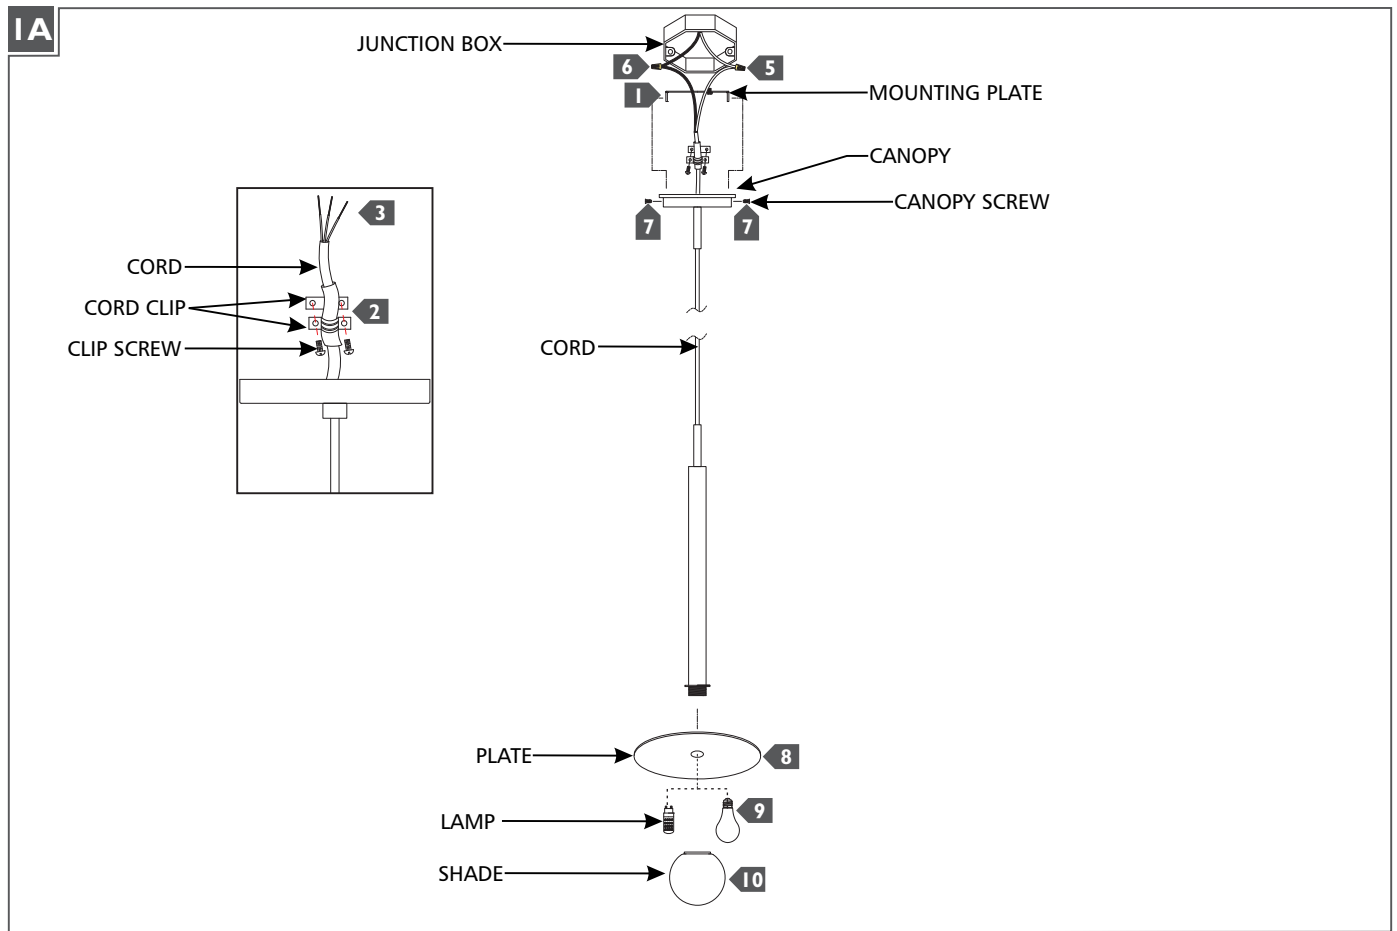

- 1** Secure the mounting plate to the junction box.
- 2** Determine the wanted height of the fixture by feeding the cord through the canopy and moving the cord up or down. Place the cord in between the two cord clips and secure it in place using the clip screws.
- 3** Trim the cord leaving enough for electrical connections. From the end of the cord, strip the insulation 4" and then strip the end of the wires. **Note:** Make sure not to nick the inner wires.
- 4** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 5** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 6** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 7** Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it place using the fixture screws.
- 8** Screw the plate onto the socket.
- 9** Install the lamp into the socket. Refer to the label on the socket for Max Wattage Information.
- 10** Install the shade by screwing it onto the socket.