


# 3.5" OCULUX ARCHITECTURAL Wall Wash - R3CSWT, R3CSWL

WAC LIGHTING  
Responsible Lighting®

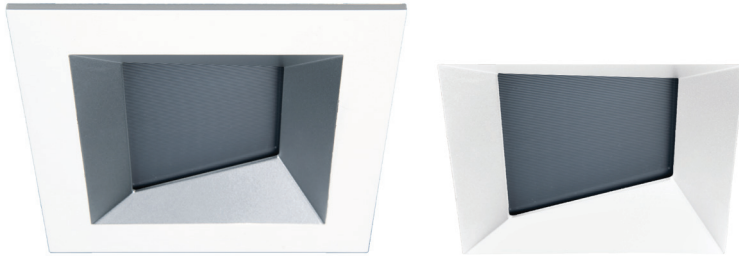

Fixture Type:

Catalog Number:

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## PRODUCT DESCRIPTION

Oculux Architectural offers performance features in a simple but versatile package for residential and commercial applications alike. One housing can be used for downlight, adjustable, pinhole, wall wash trims.

## FEATURES

- 3 beam angle options included: For Wall Wash trim optimal optics is light engine with no film installed.
- IC-Rated, Airtight, New Construction
- Adjustable LED light engine included with housing
- Shallow housing under 4" depth
- 5 year warranty

## SPECIFICATIONS

**Construction:** Die-cast aluminum trim and heat sink

**Dimming:** 100% - 1% TRIAC, ELV  
100% - 5%, 0-10V

**Input Power:** 13.5W, 120V-277V 50/60Hz

**Light Source:** High output COB LED rated life of 50,000 hours.

**Mounting:** Retention clips firmly hold trim to housing. Cutout 4 1/4" x 4 1/4"

**Finish:** Powder coated white, enamel-coated haze.

**Ceiling thickness:** 1/2" - 1"

**Standards:** UL & cUL, Wet location listed. Title 24 JA8-2016 Compliant

**Operating Temperature:** -4°F to 104°F (-20°C to 40°C)

Trims (Order Housing Separately)

	Model	Beam	Color Temp	Lumens	CBCP	Finish
	<b>R3CSWT</b> Square Trim Wall Wash	Asymmetrical	927 2700K 930 3000K 935 3500K 940 4000K	615 660 675 705	N/A	<b>HZWT</b> Haze/White <b>WT</b> White
	<b>R3CSWL</b> Square Trimless Wall Wash	Asymmetrical	927 2700K 930 3000K 935 3500K 940 4000K	615 660 675 705	N/A	<b>HZ</b> Haze <b>WT</b> White

R3CSW\_\_ - \_\_\_\_\_

Example: R3CSWT-HZWT

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive

Port Washington, NY 11050

Central Distribution Center

1600 Distribution Ct

Lithia Springs, GA 30122

Western Distribution Center

1750 Archibald Avenue

Ontario, CA 91760


# 3.5" OCULUX ARCHITECTURAL

## Wall Wash - R3CSWT, R3CSWL

# WAC LIGHTING

Responsible Lighting®

Housings (Required) - Order separately from trims

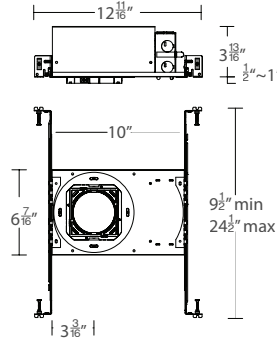

Model      Color Temp      Input

<b>R3CSN-11</b> IC-Rated, Airtight New Construction	<b>927</b>	2700K	120V - 277V
	<b>930</b>	3000K	
	<b>935</b>	3500K	
	<b>940</b>	4000K	

Example: **R3CSN-11-927**

### FEATURES

- Adjustable LED light engine included with housing:  
Optimal Vertical Adjustment for Wall Wash is 15° indexed position
- Trim or trimless with die-cast spackle frame included.
- Accepts one optional honeycomb louver or optical lens.

**GLARE CONTROL ACCESSORIES** sold separately

<b>LENS-16</b>	<b>HCL</b>	Honeycomb Louver
----------------	------------	------------------

**LENS ACCESSORIES** sold separately

<b>LENS-16</b>	<b>AMB</b>	Amber
	<b>RED</b>	Red
	<b>FR</b>	Frosted
	<b>SPR</b>	Spread
	<b>BEL</b>	Beam Elongating

**wacighting.com**  
Phone (800) 526.2588  
Fax (800) 526.2585

**Headquarters/Eastern Distribution Center**  
44 Harbor Park Drive  
Port Washington, NY 11050

**Central Distribution Center**  
1600 Distribution Ct  
Lithia Springs, GA 30122

**Western Distribution Center**  
1750 Archibald Avenue  
Ontario, CA 91760