


## ASSEMBLY INSTRUCTIONS

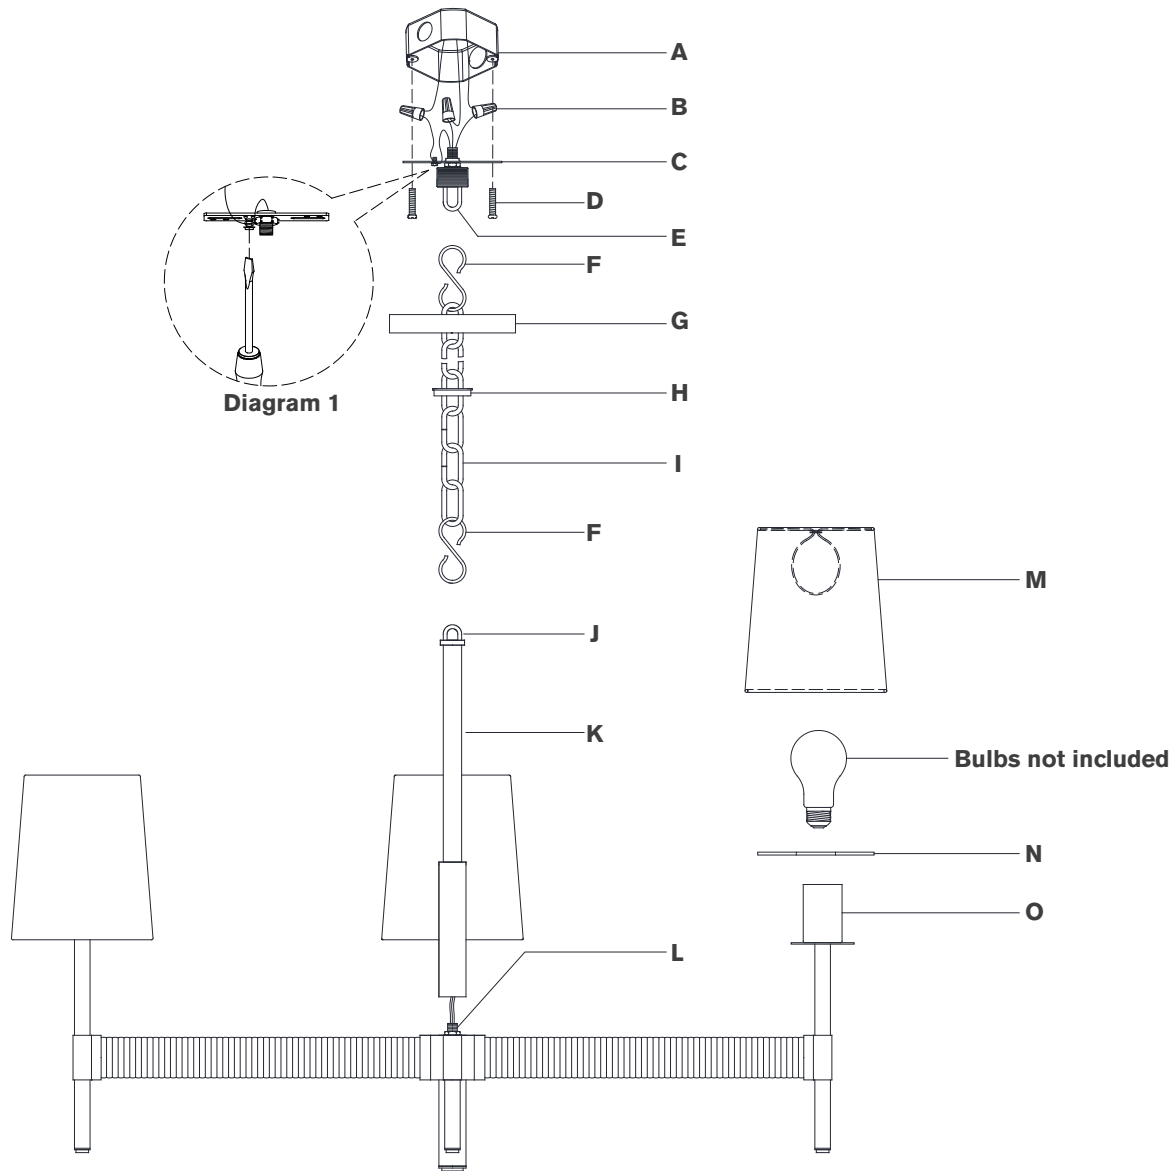

## Elle Large Chandelier

Item # SK 5555

### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

### TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Chain Pliers
Slip Joint Pliers	Measuring Tape	Wire Cutters
Wire Strippers	Scissors	

- Carefully remove all parts from the box. Place on a clean, soft surface.
- Remove mounting plate (C) from canopy (G) by loosening collar ring (H).
- Install mounting plate (C) to the junction box and secure with mounting screws (D).
- Secure collar loop (E) to mounting plate (C) using pliers to tighten locknut.
- Install canopy (G) to collar loop (E) and secure with collar ring (H).
- Feeding fixture wires through rod (K), then thread to nipple (L) on the top of fixture body.
- Determine desired overall length, and amount of chain (I) needed. Shorten chain using chain pliers. (Keep extra chain)
- Attach chain (I) to collar loop (E) and fixture loop (J) using hanging hooks (F).
- Thread fixture wire and ground wire through chain (I).  
**NOTE:** When you reach the collar loop (E), ensure there is no tension on the wires. Cut excess wires, being sure to leave about **12"** to reach the junction box.
- Separate two sides of molded wire, and strip insulation on each 5/8".
- Loosen collar ring (H) and let canopy (G) slip down chain (I) carefully.

