

AS 2-150 TC



Specification


Model	Audex AS 2-150 TC
Outlet	50mm
Motor Power	1.5kW 2HP
Rated Current (400V)	3.5A
Max Capacity	450L/min (27m ³ /h)
Max Head	22m
Impeller Passage	8.5mm
N.W	36kg
G.W	40kg
Dimensions	610 x 265 x 265mm

Pump photo is for illustrative purposes only.

Description

- Rigid cast iron body and motor for long lasting durability.
- A greatly increased maximum submersion depth due to the mechanical seal being resistant to high pressure.
- A semi-open impeller made of high chrome alloy and a wear plate made of ductile iron.
- Effective motor cooling due to discharge channel cast as part of the motor housing.
- Top outlet allowing the user to submerge the pump in a confined area.

Performance

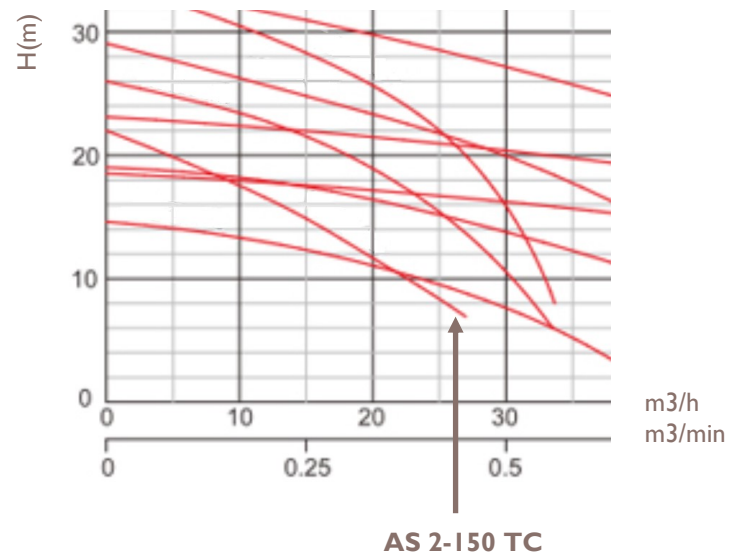

Applications

- Mines, quarries, coal ore and slurries
- General pumping purposes
- Civil engineering

AUDEX

Designed with your industry in mind

T: +44 (0)800 118 2500
E: info@intraxglobal.com
W: audexpumps.com

Audex Pumps are part of the Intrax Global Group. 10.01.20