

# AS 4-I 500 TC



## Specification


Model	Audex AS 4-I 500 TC
Outlet	100mm
Motor Power	15kW 20HP
Rated Current (400V)	29.5A
Max Capacity	1400L/min (84m <sup>3</sup> /h)
Max Head	56m
Impeller Passage	11.5mm
N.W	144kg
G.W	158kg
Dimensions	935 x 415 x 435mm

*Pump photo is for illustrative purposes only.*

## Description

- Rigid cast iron body and motor for long lasting durability.
- A greatly increased maximum submersion depth due to the mechanical seal being resistant to high pressure.
- A semi-open impeller made of high chrome alloy and a wear plate made of ductile iron.
- Effective motor cooling due to discharge channel cast as part of the motor housing.
- Top outlet allowing the user to submerge the pump in a confined area.

## Performance

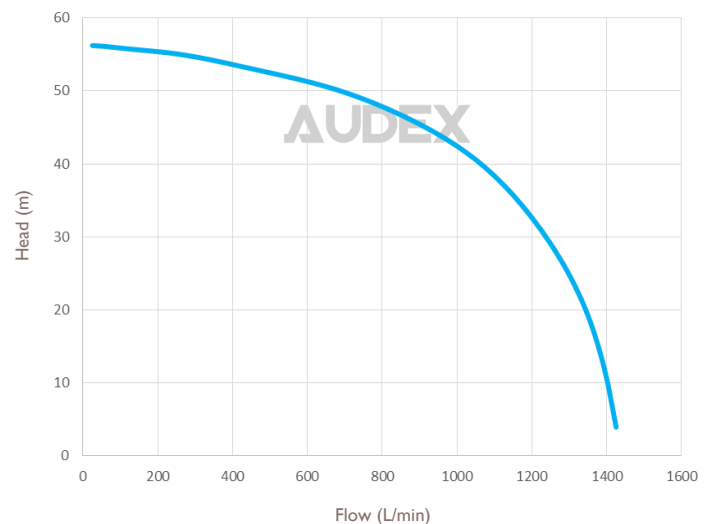

## Applications

- Mines, quarries, coal ore and slurries
- General pumping purposes
- Civil engineering

# AUDEX

**Designed with your industry in mind**

**T:** +44 (0)800 118 2500  
**E:** [info@intraxglobal.com](mailto:info@intraxglobal.com)  
**W:** [audexpumps.com](http://audexpumps.com)

*Audex Pumps are part of the Intrax Global Group. 23.04.19*