

Description

ROBINHOOD WALL CANOPY 60CM STAINLESS STEEL
WCAN60X



Key Features


Max Motor Performance
 550 m³/hr

Power Levels
 3

Control Type
 Push Buttons

Lighting
 1 x 2W LED

Venting Type
 Ducted or recirculated

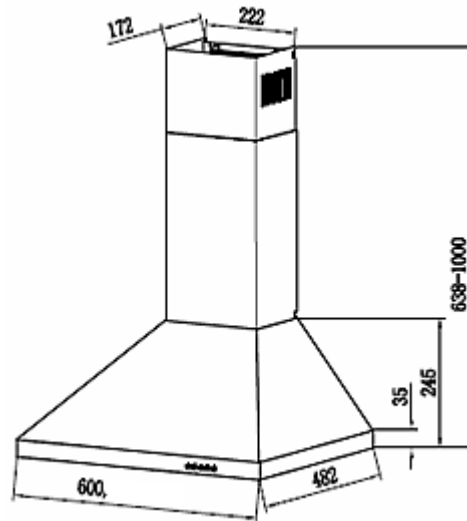

Dated: 29/03/2022

Specifications

Voltage	220~240v
Frequency	50~60Hz
Motor / Power	550m ³ /h / 100W
Motor Housing & Blower	Plastic motor housing with plastic blower
Lighting	1x2W square LED light
Total Power	102W
Controls	Push buttons
Speed Levels	3
Filters	2 x Aluminium filters
Carbon Filters	Optional (RHCF120)
No Return Valve	Included
Ducting Outlet	Ø150mm
Power Cord Length	1.5M
Chimney (Upper+Lower)	400+400mm
Product Dimensions (WxDxH)	600 x 482 x (638-1000)mm
Packaging Dimensions (WxDxH)	650 x 315 x 540mm
Net Weight	8.3kg
Gross Weight	9.5kg

Air Flow & Noise Level*		
Power Level	Air Flow (m ³ /hr) (IEC 61591)	Noise Level (dB) (IEC 60704-2-13)
1	290	58
2	375	62
3	460	65

*Air Flow & Noise Level testing is conducted in a controlled lab environment as per the IEC standards.