



SLOT DRAIN CLEAN OUT SYSTEM - LOAD CLASS A15

SLOT CLEAN-OUT TOP, WALL PLASTIC

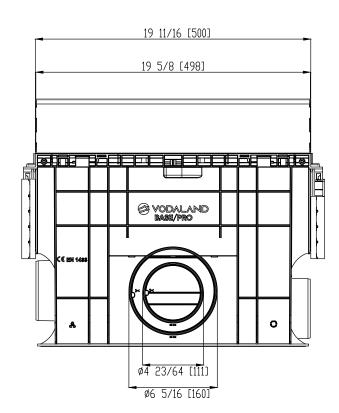

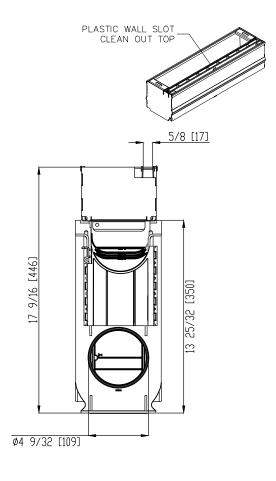

General: The SLOT Drain clean-out system by Vodaland Canada consists of the BASE 100P sand trap body with a SLOT removable clean-out top. The trap consists of a polypropylene plastic sand trap, basket, and channel connection adapters, all manufactured by Vodaland Canada.

Designed for compatibility with the SLOT 100P system (available in Plastic), the SLOT removable clean-out top securely fits onto the plastic trap's frame. The outside compartments of this frame are fillable to allow for minimal visibility of the system after installation.

Slot clean-out top specification: The SLOT removable clean-out top shall be 19.7" (500mm) long and have 0.67" (17mm) wide slot with 3.7" (94mm) throat and 3.9" (100mm) height. The SLOT removable clean-out top shall be manufactured from plastic as per specifier's requirement. The SLOT clean-out top shall be rated load class A15 per EN1433 load specification.

Sand Trap specification: Sand Trap body shall be 19.7" (500mm) long and the nominal clear opening shall be 4" (100mm) with a 6.1" (156mm) overall width. Sand Traps shall be manufactured from UV stabilized 100% recycled polypropylene. Sand Trap shall have male-to-female interlocking joints to allow firm connection with plastic channels. Sand Traps shall withstand load class A15 as per EN1433.

Name	Article	H, in	H, mm
SLOT Drain Clean-out system - Plastic	808018.9-MPSGW	17.6	446

REVISED: 2024