




REVISIONS	
REV.	DESCRIPTION

REV.	DATE	APPVD.

CUSTOMER:	P/N:	PSROT-072	REV.	APPROVED BY:

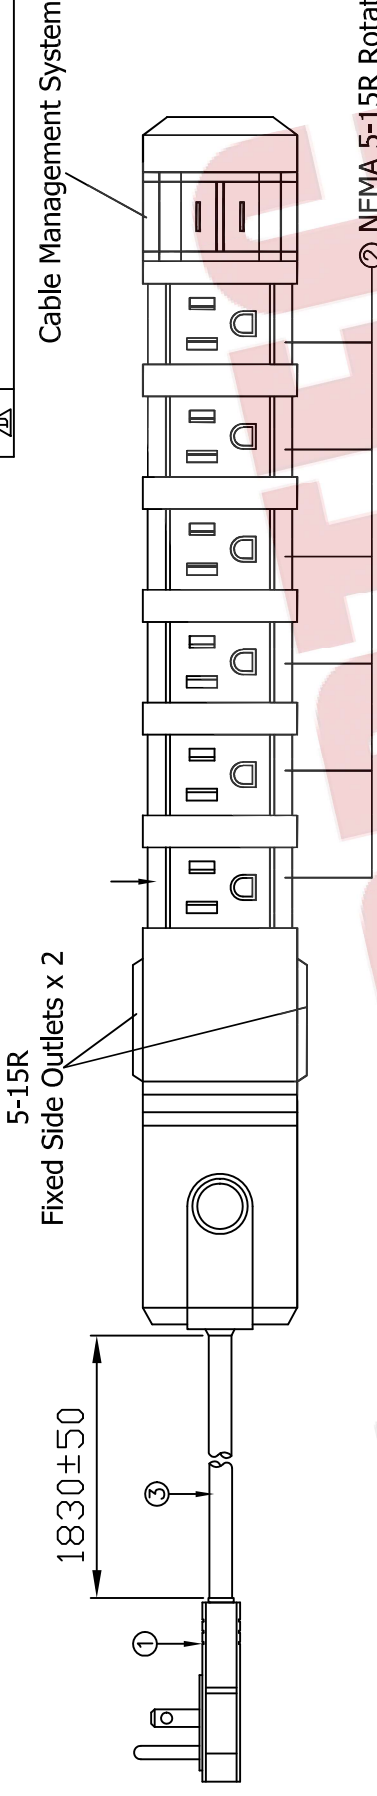

① NEMA 5-15P
360° ROTATING

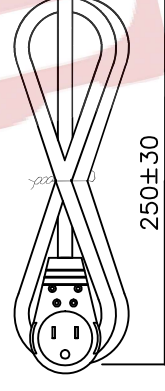

FEATURES:

Part Number:	2500.PS8-R
Number of Pivoting Outlets:	6
Number of Fixed Outlets:	2
Max Output:	1800 Watts
LED Surge Indicator:	Yes
Fireproof X3MOV Surge Protection:	Yes
Power Switch:	Yes
Circuit Breaker:	15A
Joules of Surge Protection:	2160J
Clamping Voltage:	350V
Max Spike Amps: (Lifetime Rating)	144,000A
Max Spike Volts: (Lifetime Rating)	6KV
Response Time:	<1 nanosecond
Circuit Breaker Rating:	15A
EMI/RFI Removal:	40 decibels

PRODUCT SPECIFICATION:

COLOR : BEIGE

(1) PLUG : NEMA 5-15P ROTATING 15 (A) 125 (V) APPROVAL: UL,C-UL

(2) RECEPTACLE: NEMA 5-15R 180° ROTATING X 6 APPROVAL: UL,C-UL

(3) RECEPTACLE: NEMA 5-15R FIXED X 2 APPROVAL: UL,C-UL

(4) CABLE : SJT 105°C 14AWGx3C APPROVAL: UL,C-UL

SIGNATURE
ENGINEER:
MANAGER:
CHECKED BY:
DRAWN BY:



AC Connectors of Cordtec Power Corp

Main: 1-414-434-2220 Fax: 1-414-323-8386 Text: 1-414-323-3240
Email: info@CordtecPower.com

Website: CordtecPower.com/ ACWORKS.com