


1/2" NPT Elbow Inlet

INL-EL-12-NPT

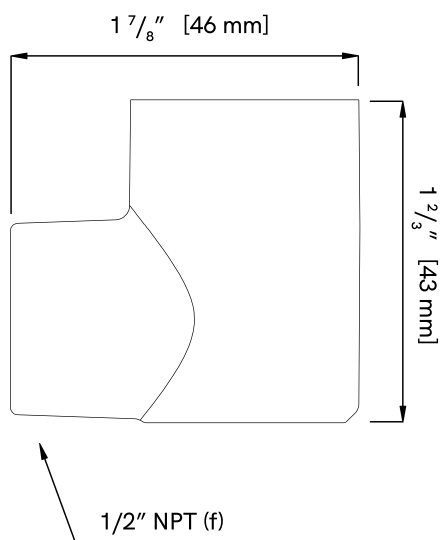


For a more flexible installation, replace the standard straight hydrant inlet with this 90° elbow. The elbow inlet shortens the overall length of the hydrant by 1/2". Use with any plumbing - NPT is the most common thread type.

Precision-cast 316L stainless steel. Includes stainless steel valve reset spring

- Use with any plumbing type
- Replaces the back end (inlet) of your Aquor hydrant
- 100% lead-free 316L stainless steel
- Positionable up to 360° from full lock in any direction


Compatibility	All Aquor hydrants and outlets except the Ground Hydrant
Inlet Threading	1/2" NPT (f)
Outlet Threading	Unique to Aquor hydrants and outlets
Connection Type	NPT (f), all plumbing
Material	Stainless Steel
Specification	ANSI B1.20.1
Warranty	10 Years
SKU	INL-EL-12-NPT

Installation

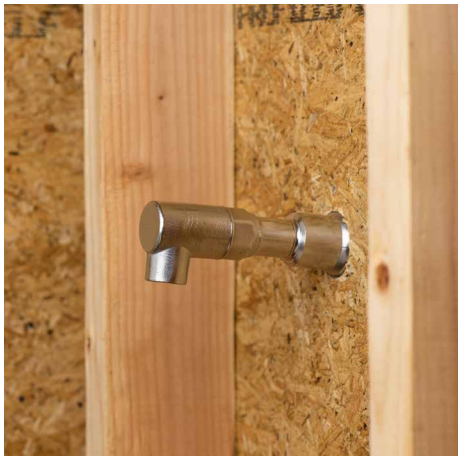


1) Remove existing inlet by unscrewing counterclockwise. Ensure the O-ring on the hydrant body is properly seated.

Note: DO NOT use Teflon tape on hydrant body threads. This may cause leaks. Only use Teflon tape on plumbing connection (fitting) threads.

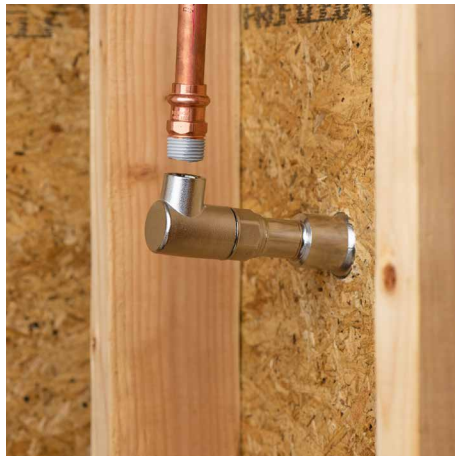

2) Hand tighten new inlet on hydrant body by threading clockwise.

Note: Elbow inlets can be positioned in any direction by rotating counterclockwise. The O-ring will keep a watertight seal up to 360° from full lock, up to 250 PSI.

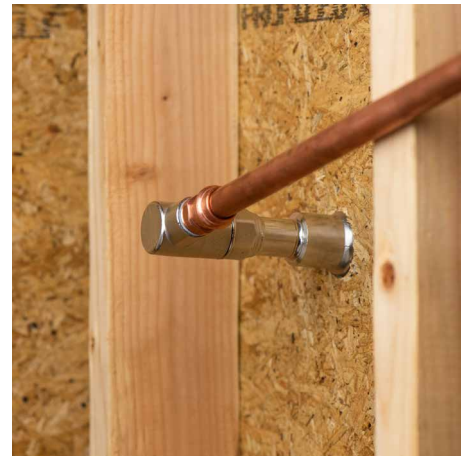

3) Connect to any type of plumbing. Check for leaks and test the hydrant operation.

For PEX joints, wait 10 minutes for it to shrink down and set before turning on the water.

If possible, use an expansion loop of PEX for easy plumbing maintenance down the road.