



# Chemical Consultants INCORPORATED

**QUIK-DRY®**

**Water Soluble Blockout**

## General Description

**QUIK-DRY® is a low viscosity, water-soluble green blockout designed to fill the open areas of the screen not covered by the emulsion. Use for masking several designs on a screen until ready to print or for multi-color work. QUIK-DRY® is also very good for touching up pinholes.**

## Advantages


- **Dries Fast**
- **Easy To Use**
- **Ideal For Use With High Mesh Counts**
- **Pleasant Odor**
- **Coverage In One Coat**
- **Durable / High Abrasion Resistance**
- **Easily Removed With Water**
- **Non-Hazardous**
- **Biodegradable / Drain Safe**

## Application

1. *When the screen is dry and free of any contaminants, pour Quik-Dry® on the squeegee side of the screen. Using a plastic blade applicator, spread over the open areas of the screen until completely filled.*
2. *Touch up all the defects, including heavy blobs which tend to dry on the outside and pop off or smear during printing. Where very fine meshes are used it may be necessary to reduce the viscosity by adding a little water.*
3. *After ink removal, remove block-out with water.*

### **Quick Tip:**

**Use blockout to fill gaps between the emulsion edge and the frame on the print side. This eliminates the need and expense of tape on the print side. Give it a try today.**

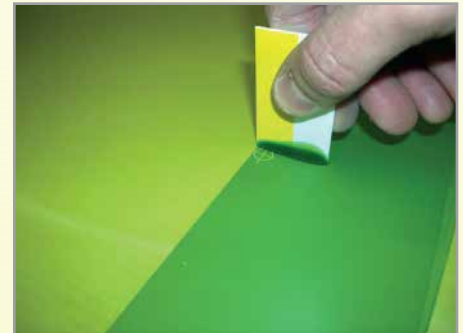

## **Sizes Available:**

**8 OZ  
Gallon**

**Pint  
4 x 1 Gallon**

**Quart  
5 Gallon Pail**

**4 x 1 Quart  
30 Gallon Drum**