

# ALTRACK

## LED Track Light

Norms: EN 60598-1, EN 60598-2-1, EN 62471, EN 62493

### Product information



Product number:	ALT85 - 40
Track System:	3 wire, 4 wire
Input Voltage (v):	220-240V
Dimming:	On/Off
Light source:	COB LED
luminaire Lifetime:	50.000h (L80-B10, Ta25°C)
Rotation Angle (degree):	350
Tilting Angle (degree):	60
IP Rating:	20
Working Temperature (°C)	-5 - +30
Storage Temperature (°C)	-20 - +50
Material:	Aluminium
Fitting Colors:	9016 Matte White / 9017 Matte Black


### Packaging information

N.W. lamp (Kg):	0.78
G.W. Carton (Kg):	15
Master carton dimensions(mm):	430x430x390
Quantity per carton:	16



Honeycomb L01    Oval diffuser L02    Diffuser L03    Anti-glare ring L04

Beam	Watt	CRI	Luminous	CCT	Code
21 	40W	90	3857.7	4000K	JALT854-40G40-S
			3639.0	3000K	JALT854-40G30-S
			3390.3	2700K	JALT854-40G27-S
26 	40W	90	3857.3	4000K	JALT854-40G40-M
			3639.0	3000K	JALT854-40G30-M
			3384.3	2700K	JALT854-40G27-M
36 	40W	90	3776.8	4000K	JALT854-40G40-F
			3563.1	3000K	JALT854-40G30-F
			3313.6	2700K	JALT854-40G27-F
45 	40W	90	3583.7	4000K	JALT854-40G40-WF
			3380.9	3000K	JALT854-40G30-WF
			3144.2	2700K	JALT854-40G27-WF
36x59 	40W	90	3620.4	4000K	JALT854-40G40-O
			3415.5	3000K	JALT854-40G30-O
			3176.4	2700K	JALT854-40G27-O

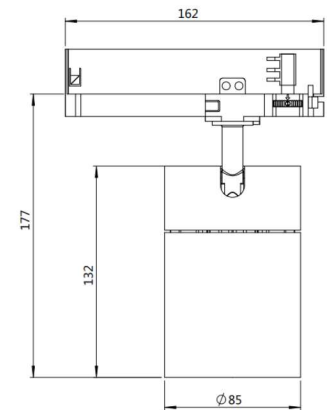

- ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

Code composition: ALI 85 6 - D 40 G27 - B S - L01

① Product Code	② Diameter size	③ Track style	④ Dimming type	⑤ Watt	⑥ LED	K & CRI	⑦ Finishes	⑧ Optical angle	⑨ Accessories
JALT	Φ85mm	6 Wire	X Not-Driver	40W	H27	2700 95	White	S Spot	L01 Honeycomb
	Φ70mm	4 Wire	T TRIAC	37W	G27	2700 90	Black	M Medium	L02 Oval diffuser
	Φ55mm	3 Wire	V 1-10V	35W	G30	3000 90		F Flood	L03 Diffuser
	Φ45mm	2 Wire	D DALI	32W	G40	4000 90		WF Wide Flood	L04 Anti-glare ring
	Φ35mm		L DC48V		E50	5000 80		O Oval	