
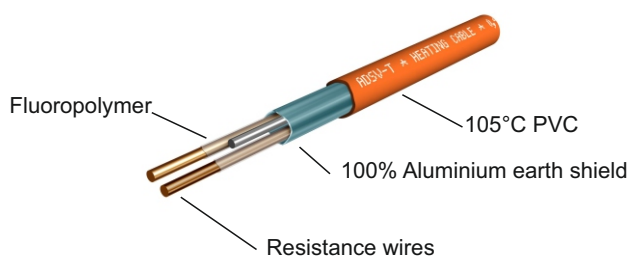
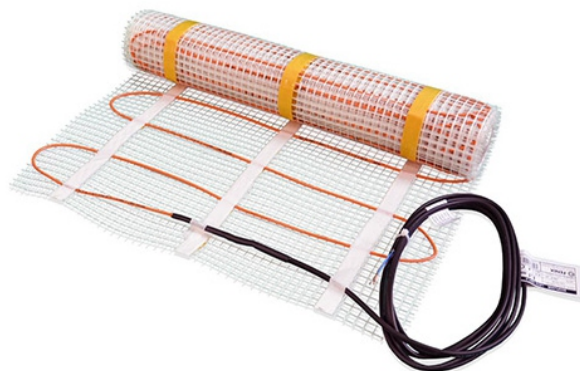


ECOFLOOR 150W/m² Cable Mat

Technical Data

Voltage	230V 50Hz
Power dissipation	150W/m ²
Length	1.0 - 16.0m
Width	0.5m
Heating cable diameter	3-3.5mm
Earth protection	100% aluminium foil
Inner insulation	Fluoropolymer
Outer insulation	105°C PVC
Cold lead length	3m
Mesh type	Alkaline resistant fibreglass
Fixing tapes	3 x 19mm self adhesive
IP rating	IP67
Approvals	EN 60335-1 & EN 60335-2-96 



Product Range

Product Code	Area(m ²)	Length(m)	Power(W)	Current(A)
LDTS150-0.5	0.50	1.0	75	0.33
LDTS150-1.0	1.00	2.0	150	0.65
LDTS150-1.5	1.50	3.0	225	0.98
LDTS150-2.0	2.00	4.0	300	1.30
LDTS150-2.5	2.50	5.0	375	1.63
LDTS150-3.0	3.00	6.0	450	1.96
LDTS150-3.5	3.50	7.0	525	2.28
LDTS150-4.0	4.00	8.0	600	2.61
LDTS150-4.5	4.50	9.0	675	2.93
LDTS150-5.0	5.00	10.0	750	3.26
LDTS150-6.0	6.00	12.0	900	3.91
LDTS150-7.0	7.00	14.0	1050	4.57
LDTS150-8.0	8.00	16.0	1200	5.22
LDTS150-9.0	9.00	18.0	1350	5.87
LDTS150-10.0	10.00	20.0	1500	6.52
LDTS150-11.0	11.00	22.0	1650	7.17
LDTS150-12.0	12.00	24.0	1800	7.83
LDTS150-14.0	14.00	28.0	2100	9.13
LDTS150-16.0	16.00	32.0	2400	10.43

Flexel International Ltd.
 Telford Road
 Glenrothes
 KY7 4NX
 UK