




Deckplate

Fatigue relief in demanding environments



- Reduce standing fatigue for workers in industry.
- Dual layer mat provides balance of comfort and wear resistance.
- Hardwearing top surface ensures a long life in normal use.
- Checker plate style design suits industrial environments.
- Self-extinguishing top surface (tested to BS EN 13501-1) provides resilience to many industrial chemicals.
- High visibility version available with bright yellow borders.
- Bevelled edges help avoid creating a trip risk.

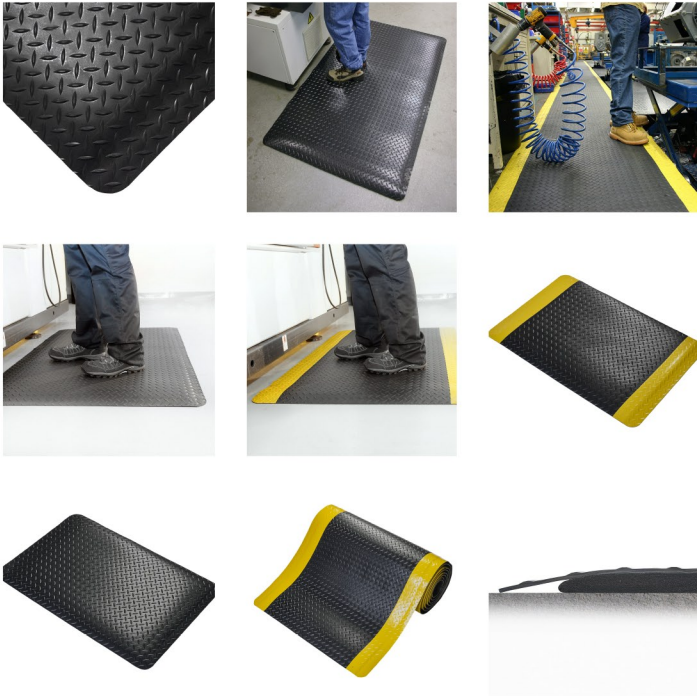

Styles Available



Standard



Safety



**Fire and Safety
Centre**

Available From:

Fire and Safety Centre
15 Atkinsons Way, Foxhills Industrial Estate
Scunthorpe, North Lincolnshire, DN15 8QJ
Tel: 01724 281044 **Web:** www.fireandsafetycentre.co.uk
Email: sales@fireandsafetycentre.co.uk

Parts

Part Number	Size	Colour	Weight (kg)
DP010004	0.6 m x 18.3 m	Black	71.92
DP010004C	0.6 m x per linear metre	Black	3.93
DP010005	0.9 m x 18.3 m	Black	108
DP010005C	0.9 m x per linear metre	Black	8
DP010007	1.2 m x 18.3 m	Black	166
DP010007C	1.2 m x per linear metre	Black	9
DP010011	1.5 m x 15 m	Black	178
DP010011C	1.5 m x per linear metre	Black	9.7
DP010609	0.6 m x 0.9 m	Black	3.54
DP010903	0.9 m x 3 m	Black	17.71
DP010906	0.9 m x 6 m	Black	35.42
DP010915	0.9 m x 1.5 m	Black	8.86
SD010701	0.6 m x 0.9 m	Black/Yellow	4
SD010702	0.9 m x 1.5 m	Black/Yellow	11
SD010703	0.9 m x 3 m	Black/Yellow	22
SD010704	0.9 m x 6 m	Black/Yellow	44
SD010706	0.6 m x 18.3 m	Black/Yellow	93
SD010706C	0.6 m x per linear metre	Black/Yellow	5
SD010707	0.9 m x 18.3 m	Black/Yellow	114
SD010707C	0.9 m x per linear metre	Black/Yellow	8
SD010708	1.2 m x 18.3 m	Black/Yellow	166
SD010708C	1.2 m x per linear metre	Black/Yellow	6
SD010709	1.5 m x 15 m	Black/Yellow	178
SD010709C	1.5 m x per linear metre	Black/Yellow	9.7

Technical Specifications

Material	Vinyl top surface with PVC foam backing (fusion bonded, not glued)
Surface Finish	Diamond pattern
Product Height	15 mm
Roll Length	18.3 m
Min. Operating Temperature	0°C
Max. Operating Temperature	+60°C
Resistance to Chemicals	The PVC top surface provides limited resistance to chemicals and oils
Environmental Resistance	Suitable for dry indoor environments
Typical Applications	Packing stations, Assembly areas, Production lines where regular turning occurs
Installation Method	Loose lay
Cleaning Method	Brush/mop the top surface
Fire Tested to	BS EN 13501-1 Class Cfl - s1
COO (Country of Origin)	CN
Guarantee	3 years when used in a dry environment

Additional Information



Deckplate EN ISO 9239 Fire Test



Deckplate EN ISO 11925 Fire Test



Deckplate BS EN 13501 Fire Test



**Fire and Safety
Centre**

Available From:

Fire and Safety Centre

15 Atkinsons Way, Foxhills Industrial Estate
Scunthorpe, North Lincolnshire, DN15 8QJ

Tel: 01724 281044 **Web:** www.fireandsafetycentre.co.uk

Email: sales@fireandsafetycentre.co.uk