



Left to right: HDC window door style and HDC solid door style (HDC18SD2)

Heavy Volume Amana® Commercial HDC Series

Power Output

- 1000-2100 Watts of power
- Unique method of microwave energy distribution provides superior even heating throughout the entire cavity

Multi-language universal operation, with programming flexibility

- Oven interface and programming software supports 24 languages
- Smart USB connectivity standard
- Compatible with ACP Programming Application

Easy to Use

- Up to 100 programmable menu items simplifies cooking
- 11 power levels and 4 cooking stages for cooking flexibility
- Multiple quantity function automatically calculates cooking times for multiple portions
- Automatic Voltage Sensor adjusts to the power supply (*North America only >1200W*)
- See-through door and lighted interior for monitoring without opening the door (*HDC18SD2 excluded*)
- Ample 0.6 cubic ft. (17 liter) capacity accommodates a standard half-sized pan
- Stackable to save valuable counter space

Easy to Maintain

- Stainless steel exterior and interior for easy cleaning and increased durability
- Removable, cleanable air filter protects oven components
- Constructed to withstand the foodservice environment, multiple users and variable ambient temperatures
- Gasket sealed Borosilicate Glass tray for easy cleaning
- Interlock switch assembly is engineered for maximum durability and long life.

Market Region: North America

Chef Line | Heavy Volume
This category of microwave oven is ideal for...

Applications

- Fast casual dining
- Prep stations
- Bars & grills
- Quick service restaurants
- Casual dining
- Convenience stores
- Bakery cafés
- Kiosks
- Food courts

Through put potential by oven wattage (items per hour)

| Food item | 1000W | 1200W | 1800W | 2100W |
|---------------------------------------|-------|-------|-------|-------|
| Steamed Shrimp (8oz (227g)) | 22 | 23 | 33 | 38 |
| Scrambled Eggs (4oz (120g)) | 48 | 51 | 65 | 72 |
| Steamed Rice (8cups (1.2kg)) | 2 | 3 | 5 | 7 |
| 1 Baked potato (9oz (255g)) | 17 | 18 | 21 | 29 |
| Salmon fillet (8oz (227g)) | 19 | 20 | 26 | 29 |
| Chocolate Cake in a Cup | 57 | 60 | 80 | 97 |
| Fresh Steamed Veggies (6oz (170g)) | 45 | 48 | 65 | 80 |
| Asparagus (8oz (227g)) | 29 | 30 | 45 | 51 |
| Dumplings (6ea) | 19 | 19 | 24 | 28 |

All ACP, Inc. commercial ovens are supported by our Culinary Center. Do not hesitate to contact us for any questions regarding food preparation, menu development and cooking times: testkitchen@acpsolutions.com



Optional Accessories

- Cavity shelf (SE10)
- Non-stick baskets (TB10/S, SB10/S, MB10/S)
- Oven Cleaner and Shield Protectant (CL10*, SH10*)

Service

All products are backed by the ACP, Inc.
24/7 ComServ Support Center

Warranty

Warranty Certificate for this product can be found on the ACP, Inc. website at www.acpsolutions.com/warranty

Safety and Sanitation


This ACP, Inc. product meets and exceeds safety and sanitation standards set for commercial microwave ovens by UL, ETL, NSF, CSA, and FDA.



For other market regions, please see product literature online

*Only shipped in U.S.A.



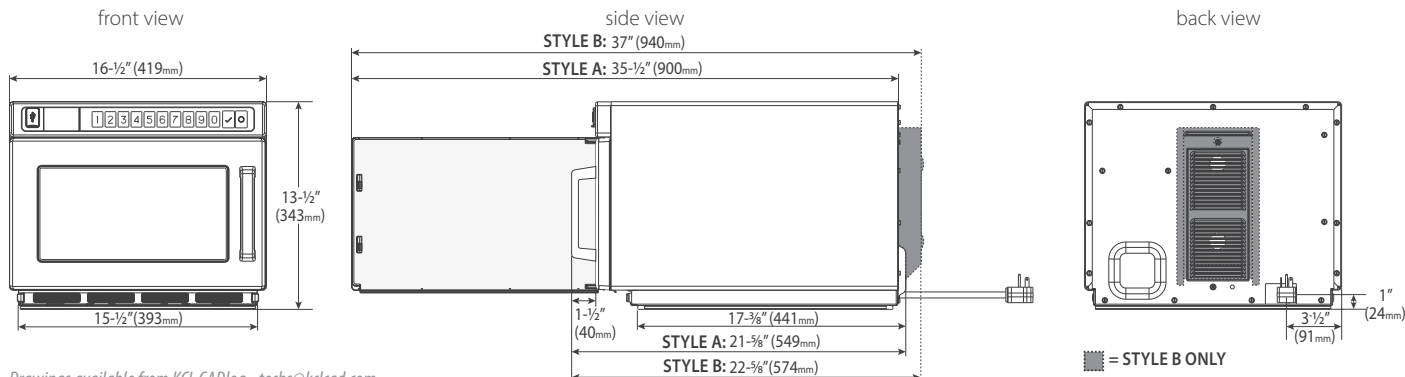

Drawings available from KCL CADlog - techs@kclcad.com

| Dimensions | | STYLE A | STYLE B |
|------------------------|-------------------------------|----------------|---------------------------|
| Exterior | Height | 13 1/2" (343) | 13 1/2" (343) |
| | Width | 16 1/2" (419) | 16 1/2" (419) |
| | Depth† | 21 5/8" (549)† | 22 5/8" (578)† |
| Cavity | Height | 6 3/4" (171) | 6 3/4" (171) |
| | Width | 13" (330) | 13" (330) |
| | Depth | 12" (305) | 12" (305) |
| Usable Cavity Space | 0.6 cubic ft. (17 liter) | | 0.6 cubic ft. (17 liter) |
| Door Depth | 35 1/2" (900), 90°+ door open | | 37" (940), 90°+ door open |
| Installation Clearance | Top | 2" (51) | 2" (51) |
| | Sides | 1" (25) | 1" (25) |
| | Back | None | None |
| Shipping Carton | Height | 18 5/8" (473) | 18 5/8" (473) |
| | Width | 21 7/8" (556) | 21 7/8" (556) |
| | Depth | 24 5/8" (625) | 24 5/8" (625) |
| Weight | | | |
| Product Weight | Ship weight (approx.) | UPS Shippable | |
| 68 lbs (31kg) | 74 lbs (34kg) | Yes, ISTA 1A | |

| Features | |
|--------------------------|--|
| Configuration | Countertop |
| Stackable | Yes |
| Display | LCD |
| Control System | Touchpad |
| Programmable Control | Yes, 10 pads |
| Braille | Overlay available |
| Settings Programmable | 100 |
| Max. Cooking Time | 60:00 |
| Microwave Distribution | Double rotating antennas, top and bottom |
| Power Levels | 11 |
| Defrost | Yes, power level 2 |
| Time Entry Option | Yes |
| Multiple Portion Setting | Yes, X2 by default, optional up to X9 |
| Stage Cooking | 4 stages |
| Interior Light | Yes, LED |
| Automatic Voltage Sensor | Yes (North America only >1200W) |
| Air Filter | Yes, 1 removable |
| Signal | End of cycle, adjustable |
| Door Handle | Grab & Go |
| Exterior Finish | Stainless steel |
| Interior Finish | Stainless steel with gasket sealed borosilicate tray |

Measurements are US Standard. Measurements in () are in millimeters

* IEC 60705 Tested

† Includes handle

Electrical Configuration

| Region | Model#/ UPC | Automatic Voltage Sensor | Exterior Depth Style | Door Style | Power Consumption | Power Output (microwave) | Power Source | Plug Configuration | Cord Length | Frequency | Magnetron |
|-------------------------------|---------------------------------|--------------------------------|----------------------------|------------|----------------------|-----------------------------|--------------------------------------|--------------------|-------------------|-----------|-----------|
| North America single phase | HDC1015 728028470949 | No | A | Window | 1610W, 14.4 A | 1000W* | 120V, 60Hz, 15A, single phase | NEMA 5-15P | 5 ft. (1.5m) | 2450MHz | 2 |
| North America single phase | HDC12A2 719881159355 | No | A | Window | 2000W, 16.8 A | 1200W* | 120V, 60Hz, 20A, single phase | NEMA 5-20 | 5.5 ft. (1.7m) | 2450MHz | 2 |
| North America single phase | HDC182 719881159362 | Yes | A | Window | 3000W, 14.4 A | 1800W* | 208/240V, 60Hz, 20A, single phase | NEMA 6-20 | 5.5 ft. (1.7m) | 2450MHz | 2 |
| North America single phase | HDC1815 728028315929 | Yes | A | Window | 3000W, 14.4 A | 1800W* | 208/240V, 60Hz, 15A, single phase | NEMA L6-15P | 5.5 ft. (1.7m) | 2450MHz | 2 |
| North America single phase | HDC18SD2 719881159379 | Yes | A | Solid | 3000W, 14.4 A | 1800W* | 208/240V, 60Hz, 20A, single phase | NEMA 6-20 | 5.5 ft. (1.7m) | 2450MHz | 2 |
| North America single phase | HDC212 719881159386 | Yes | B | Window | 3200W, 15.4 A | 2100W* | 208/240V, 60Hz, 20A, single phase | NEMA 6-20 | 5.5 ft. (1.7m) | 2450MHz | 2 |

Specification #:

AIA File #:



225 49th Ave. Dr. SW, Cedar Rapids, IA 52404 U.S.A.
800-233-2366 • 319-368-8120 • Fax: 319-368-8198
www.acpsolutions.com

Part No. 20271301

Updated 09/06/2022

© 2022 ACP, Inc., Cedar Rapids, Iowa 52404

an Ali Group Company



The Spirit of Excellence