

Restaurant Line | Medium & Heavy Volume This category of microwave oven is ideal for...

Applications

 Pubs Fast casual restaurants

 Prep stations Family restaurants

Through put potential by oven wattage (items per hour)

Food item	1200W	1800W	2100W
Mac 'n cheese (pre-cooked) (2lbs (907g))	15	21	25
Steamed Shrimp (1lb (454g))	21	29*	34*
Baked potato (10oz (283g))	18	21	26
Fresh Asparagus (80z (227g))	21	28*	33*
Chicken Noodle Soup (16oz (480ml))	19	28	33
Cinnamon Roll (pre-baked) (60z (171g))	120	144	164

*For best steaming results, use 1800-2100W

All ACP, Inc. commercial ovens are supported by our Culinary Center. Do not hesitate to contact us for any and cooking times: testkitchen@acpsolutions.com



Medium & Heavy Volume

Amana® Commercial RFS Series

Power Output

- 1200-2100 Watts of power
- Five power levels for consistent, delicious results for frozen, refrigerated and fresh foods - from the freezer to table in minutes.

Easy to Use

- Up to 100 programmable menu items simplifies cooking and ensures consistent
- Four stage cooking option with one-touch programming. Reduces prep time, labor and food waste while providing consistent results.
- Multiple quantity pad calculates the proper cooking times for multiple portions.
- User friendly touch controls are easy to use.
- · Time entry option for added flexibility.
- Digital display with countdown timer for simple operation and "at-a-glance" monitoring.
- Braille touch pads.
- See-through door and lighted interior for monitoring without opening the door.
- 1.2 cubic ft. (34 Liter) capacity accommodates a 14" (356 mm) platter, prepackaged foods and single servings.
- Stackable to save valuable counter space.

Easy to Maintain

- Stainless steel exterior and interior for easy cleaning and a professional look.
- Removable air filter protects oven components.
- Constructed to withstand the foodservice environment.
- FTI Listed

Optional Accessories

- Cavity shelf (SE10)
- Non-stick baskets (NB10, TB10/S, SB10/S, MB10/S)
- Oven Cleaner and Shield Protectant (CL10*, SH10*)

Service

All products are backed by the ACP, Inc. 24/7 ComServ Support Center



Warranty

Warranty Certificate for this product can be found on the ACP, Inc. website at www.acpsolutions.com/warranty




Safety and Sanitation

This ACP, Inc. product meets and exceeds safety and sanitation standards set for commercial microwave ovens by UL, ETL, NSF, CSA, and FDA





Amana® Commercial Microwave **RFS** Series | Medium & Heavy Volume

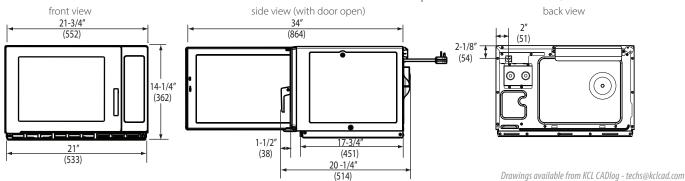

Dimensions							
Exterior		H 14 %" (365)		W 21 ¾" (551)	D† 21" (533)		
Cavity		H 8 %" (226)		W 14 1/8" (359)	D 16 1/4" (413)		
Usable Cavity Space		1.2 cubic ft. (34 liter)					
Door Depth		34" (864), 90°+ door open					
Installation Clearance	Top: 2" (51)			Sides: 1" (25)	Back: None		
Shipping Carton		H 18 ½" (467)		W 26 1/8" (663)	D 22 %" (581)		
Weight							
Model Type	Pr	oduct Weight	Ship weight (approx.)		UPS Shippable		
1200W	66	6 lbs (30 kg)		71 lbs (32 kg)	Yes		
1800W or 2100W	70	0 lbs (32 kg)		77 lbs (35 kg)	Yes		

Measurements are US Standard. Measurements in () are in millimeters

,	Diamings available nomines enblog teems (enclaration)						
Features							
Configuration	Countertop						
Stackable	Yes						
Display	LED						
USB Port	No						
Control System	Touchpad						
Programmable Control	Yes, 10 pads						
Braille	Yes						
Settings Programmable	100						
Max. Cooking Time	60:00						
Microwave Distribution	Rotating antennas, top & bottom						
Power Levels	5						
Defrost	Yes						
Time Entry Option	Yes						
Multiple Portion Setting	Yes, X2						
Stage Cooking	Yes, 4 stages						
Interior Light	Yes						
Automatic Voltage Sensor	Yes (North America only >1200W)						
Air Filter	Yes, 1 removable with cleaning reminder						
Signal	End of cycle, adjustable						
Door Handle	Lift & Pull						
Exterior Finish	Stainless steel						
Interior Finish	Stainless steel						

Electrical Configuration										
Region	Model#/ UPC	Automatic Voltage Sensor	Power Consumption	Power Output (microwave)	Power Source	Plug Configuration		Cord Length	Frequency	Magnetron
North America single phase	RFS12TS 728028020878	No	2000 W, 16A	1200W*	120V, 60Hz, 20A, single phase	NEMA 5-20		5 ft. (1.5m)	2450MHz	2
North America single phase	RFS18TS 728028020885	Yes	2800 W, 13.5A	1800W*	208/240V, 60Hz, 20A, single phase	NEMA 6-20		5 ft. (1.5m)	2450MHz	2
North America single phase	RFS21TS 728028471250	Yes	3200 W, 15.5A	2100W*	208/240V, 60Hz, 20A, single phase	NEMA 6-20	J	5 ft. (1.5m)	2450MHz	2



225 49th Ave. Dr. SW, Cedar Rapids, IA 52404 U.S.A. 800-233-2366 • 319-368-8120 • Fax: 319-368-8198 www.acpsolutions.com

Part No. 20155301 Updated 09/06/2022 © 2022 ACP, Inc., Cedar Rapids, Iowa 52404



^{*} IEC 60705 Tested

[†] Includes handle