

SC488-HF2LDF(DXX) Collinear omni, 9.5-10 dBd, low PIM, HD, 824-896 MHz

Also referred as: SRL488DHDLN\*2DTx

- 9.5-10 dBd gain with omni-directional pattern
- Industry-leading PIM performance of <-150 dBc for lower intermodulation and higher performance
- Compact lightweight heavy-duty fiberglass radome
- Electrical downtilt available

**Recommend using the SMK-325-A3 or SMK-325-A7 kit when side mounting.**

The SC488-HL series of heavy duty, low PIM fiberglass collinear omni-directional antenna offers narrow beam width and higher gain for systems in trunking (806-869 MHz), cellular (824-896 MHz), uplink trunking (896-940 MHz) or other bands (694-746, 928-960, ... MHz).

When ordering, please refer to the chart below for the model number. Downtilt configurations are subject to various list price. Inverted version also available. Please contact your Sinclair Sales Representative or Customer Service Representative for more information.

Model Number	Gain(dBd)	Downtilt	CTM	Mounting Config.
SC488-HF2LDF(D00)	10	0°	005312	upright / inverted
SC488-HF2LDF(D01)	9.5	1°	006191	upright
SC488-HF2LDF(D02)	9.5	2°	006191	upright
SC488-HF2LDF(D03)	9.5	3°	006191	upright
SC488-HF2LDF(D04)	9.5	4°	006191	upright
SC488-HF2LDF(D05)	9.5	5°	006191	upright
SC488-HF2LDF(D06)	9.5	6°	006191	upright



www.sinclaire.com

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinclaire.com	salesuk@sinclaire.com	salesla@sinclaire.com	salescan@sinclaire.com

#### Electrical Specifications

Frequency Range	MHz	824 to 896	
Connector		7/16 DIN-Female	
Gain (nominal)	dBd (dBi)	10 (12.1)	*1
Input VSWR (max)		1.5:1	
Polarization		vertical	
Impedance	Ω	50	
Pattern		Omni-directional	
Vertical beamwidth (typ)	degrees	6	
Average Power Input (max)	W	750	
Passive intermod. (2x20W, 3rd ord.)	dBc	-150	
Lightning protection		DC ground	
Electrical tilt (available)		0 to 6 degrees	

#### Mechanical Specifications

Width	in (mm)	2.88 (73)	
Depth	in (mm)	2.88 (73)	
Length/ Height	in (mm)	190 (4826)	
Base pipe diameter	in (mm)	2.88 (73)	
Base pipe mounting length	in (mm)	24 (610)	
Radome material		fiberglass (UV protected)	
Weight	lbs (kg)	33.8 (15.35)	
Mounting Hardware (Included)		Clamp130	*2
Actual shipping weight	lbs (kg)	66 (29.96)	
Shipping dimensions	in (mm)	223x4x4 (5664x102x102)	
Mounting configurations		upright, inverted	*3
Recommended For Offset Side Mount:		SMK-225-A3-T5 or SMK-225-A7-T5	

#### Environmental Specifications


Temperature range	°F (°C)	-40 to +140 (-40 to +60)
Wind Loading Area (Flat Plate Equivalent)	ft² (m²)	2.11 (0.2)
Wind Loading Area (1/2" ice)	ft² (m²)	2.96 (0.27)
Rated wind velocity (no ice)	mph (km/h)	185 (298)
Rated wind velocity (1/2" radial ice)	mph (km/h)	155 (250)
Lateral thrust (100 mph No Ice)	lbs (N)	81 (360.3)
Bending moment (100 mph No Ice)	ft-lbs (Nm)	420 (567)

#### Notes

- \*1 : 9.5 dBd with downtilt
- \*2 : Qty 2
- \*3 : D00 model (0° DT) can be installed upright or inverted, downtilt models upright only.

#### Ordering Information

When ordering, please refer to the model list on the previous page for specific model numbers and downtilt configurations.

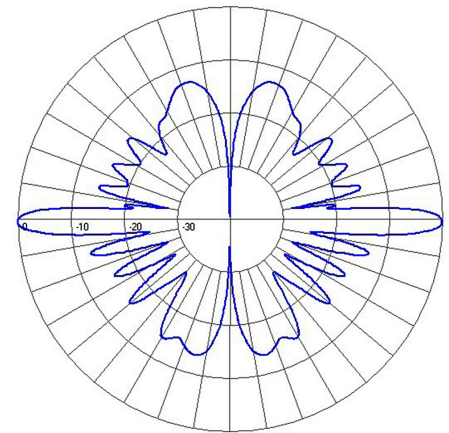

Elevation, 0°DT

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com