

# TOP VEHICLE TECH.

## GRKFD02 FORD FOCUS 2011-2015 INSTALLATION MANUAL V1.0521



*This dash image is a visual representation for display purposes only.*

*The information provided in this document is subject to change without notice due to changes and/or improvements to the product/s.*

[www.topvehicletech.com](http://www.topvehicletech.com)

## ABOUT THIS PRODUCT

---

The **GRKFD02** installation kit allows for the retention of the vehicle's steering wheel controls and helps maintain the original aesthetic of the interior when installing a new car stereo. The **GRKFD02** gives you everything you need for a complete install in one box. The components of this kit are compatible for the Ford Focus (2011-2015) with Visteon factory stereos. The wiring harness and interface will retain the steering wheel controls, factory phone buttons and parking sensor audio (if vehicle is equipped). The interface supplied features a Ford OEM specific connector.

**NB: this installation kit works with vehicles that have an Advanced display only.**



## CONTENTS

---

- 1x Fascia plate (with accessories)
- 1x Instruction manual
- 1x Steering wheel control harness and interface
- 1x Antenna adapter
- 1x Stereo patch lead

## CUSTOMER SUPPORT

---

Installations should be carried out by, or under the guidance of an experienced installer. If you do encounter any problems during the installation of this product, then please contact our dedicated customer service team at:

Phone: **01420 470 605** E-Mail: [help@topvehicletech.com](mailto:help@topvehicletech.com)

## FITTING GUIDE

---

### STEREO REMOVAL

1. Unclip the small trim panel located directly underneath the main fascia panel. Further unclip another plastic panel found underneath to uncover 2x torx screws.
2. Remove the 2x torx screws, and using a panel removal tool, pry away the entire main fascia panel, disconnecting the hazard switch connector in the process.
3. Remove the 2x screws that hold the main radio in place and remove it from the dashboard, again, disconnecting all the wiring in the process.

### FASCIA PLATE SET-UP

1. Once you have taken the main fascia panel off, you will need to transfer the air vents to the new fascia. To do this you will need to disengage the clips of each vent and when free, simply re-locate onto the new fascia.
2. Take the new hazard switch that comes with the kit and place into the new fascia.
3. Attach the brackets to either side of the radio. When attached, roughly test fit the radio and bracket combination in relation to the new fascia, doing this, you can best measure whether the brackets need moving forwards/backwards.
4. After the "***Stereo Installation***" process is complete and you are re-assembling the vehicle, you will then need to clip the trim frame around the display.

## FITTING GUIDE


---

### STEREO INSTALLATION

1. Take the steering wheel control interface and attach the 14-way steering wheel harness connector to the relevant side.
2. Take the patch lead and only attach '**Key 1**', '**Key 2**' and '**Ground**' to the corresponding wires on the stereo. When done, connect the 12-way connector to the steering wheel control interface.
3. Attach the antenna adapter to the vehicles pre-existing connection and the back of new stereo.
4. Attach the 4-pin speaker module to the equivalent connector on the steering wheel harness.
5. Attach the red & white RCA connectors from the steering wheel harness to the back of the new stereo.
6. Attach the display connector from steering wheel harness to vehicles pre-existing display. In turn, connect the vehicles display connector to the steering wheel control interface.
7. Attach the additional wiring on the harness to the back of the stereo:  
**Pink** - Speed Pulse **Green** - Park Brake **Purple** - Reverse **Blue** - Antenna Remote
8. When all the above wires (and any additional accessories) have been connected, finally make the power connections between the stereo and the vehicles pre-existing connector.

## STEERING WHEEL CONTROL FUNCTIONALITY

Please note: configuration layout may differ dependent on vehicle model.

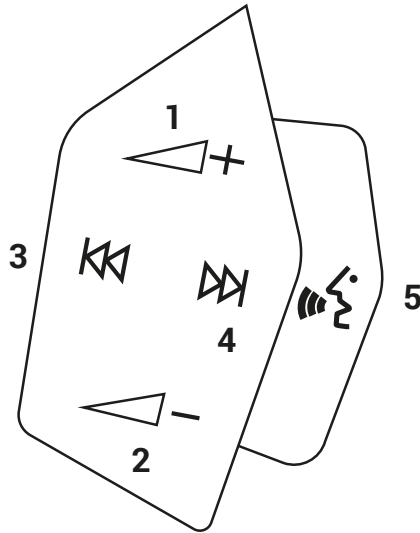

### Original Button

1. Volume +
2. Volume -
3. Track -
4. Track +
5. Speech

### New Function


1. Volume +
2. Volume -
3. Track -
4. Track +
5. Mute

### SETTING TIME/DATE

1. Press Speech (5.) to turn on the vehicle display.
2. Press and hold Speech (5.) for 2x seconds to enable menu mode.
3. Press Volume +/- (1/2.) to navigate to the clock setting option. Press Speech (5.) to confirm selection.
4. Adjust the time using Volume +/- (1/2.) and press Speech (5.) to confirm.
5. Follow the same process to adjust the date.
6. Once time and date have been set, press Speech (5.) to confirm.

NB: the menu option will time out after 15-20 seconds of inactivity.

# WIRING DIAGRAM

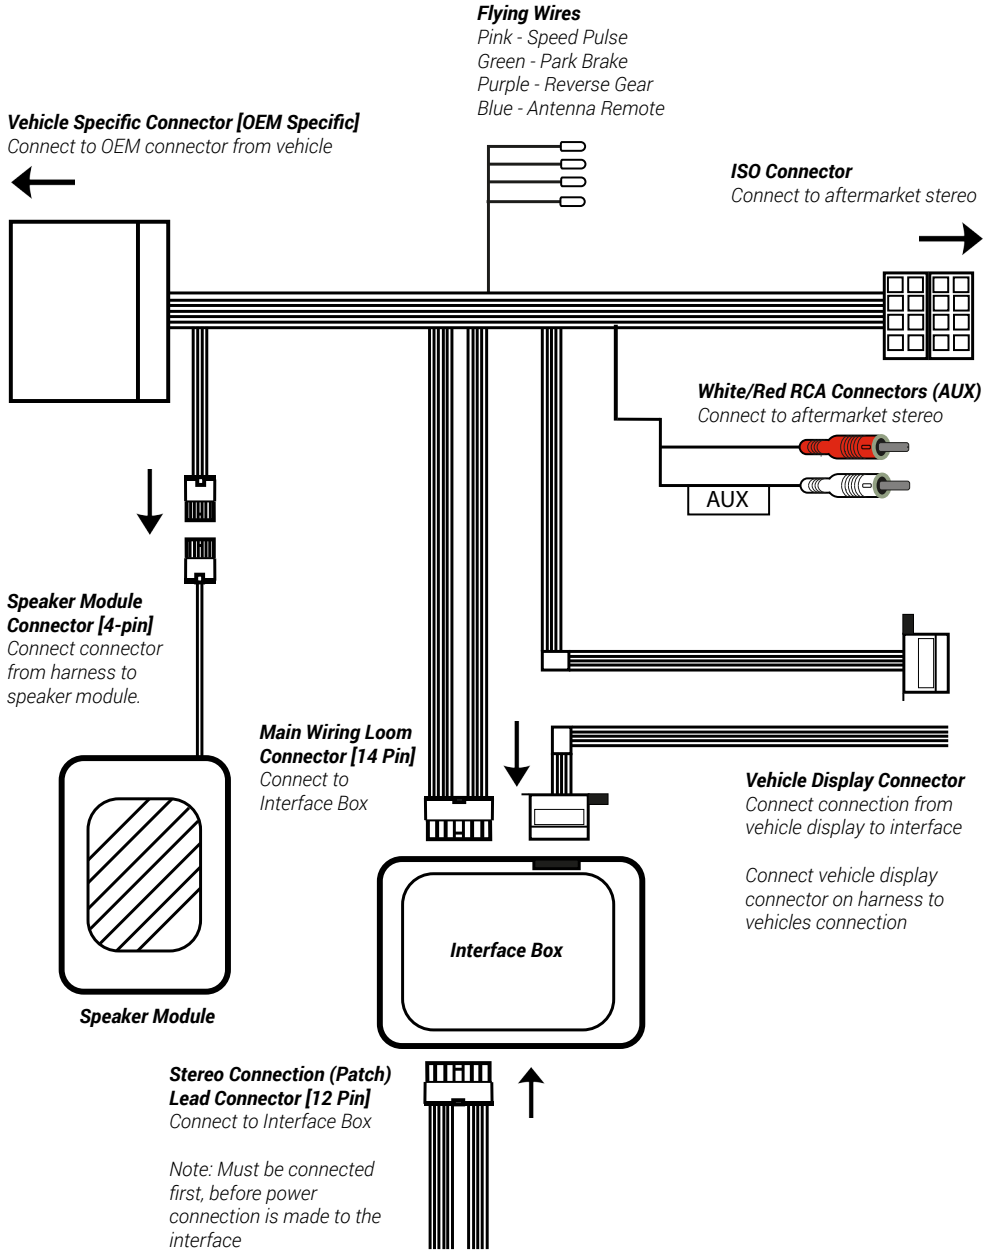





## TECHNICAL ASSISTANCE

---

If at any point you experience any problems and need any assistance before, during or after the installation process, please contact us via :

Phone: **01420 470 605**

E-Mail: **help@topvehicletech.com**

Mon - Fri 9am - 5.30pm GMT

If you would like to download a digital copy of this manual, or any other product, then please visit the ***www.topvehicletech.com*** website.

This manual is considered correct at the time of printing but is subject to change. For the latest manuals & updates, refer to our website.

*Copyright 2021 by TopVehicleTech.*

*All rights reserved. No part of this publication may be reproduced, distributed or transmitted in any form or by any means, including photocopying, recording, copying or other electronic or mechanical methods, without the prior written permission of the author.*