


### (CB5019) – Permanent Mud-In Flush Mount Wall Air Return, 14" x 6" (Duct Opening)

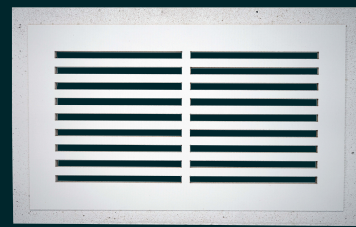

#### GENERAL SPECIFICATIONS:

- Mud-in/ Tapeable Air Return Vent for duct opening (if applicable) size 14" x 6"
- Overall Dimensions: 16" x 10" x 0.5"
- Vented Opening Dimensions: 12" x 6"
- Fits into a Drywall Opening of 16.25" x 10.25"

#### APPLICATION:

- Designed to be installed with ½" thick drywall
- Install anywhere on a wall where there are duct openings (if applicable) both high (towards the ceiling) or low (towards the floor)
- Permanent installation - once installed the air return vent cannot be removed

#### FEATURES:

- Impact resistant Triple Fibre Reinforced Cement Board
- Easy installation
- Primed vent ready to accept paint
- Machine beveled outer edges to allow for air nails or screws, joint tape, and drywall compound
- Vent slots angled 20 degrees for directional venting
- Made of non-flammable materials
- Moisture, mold, and water resistant

#### PRODUCT SPECIFICATIONS:

- Each slot size - 5.805" x 0.32"
- 22 straight horizontal vent slots
- Over 33 square inches of open vent area

#### MATERIAL SPECIFICATIONS:

**Raw Material:** Cement, fibres, quartz sand, non-hazardous fillers

**Density:**  $1.0 < D \leq 1.2 \text{ g/cm}^3$

**Asbestos Content:** 100% asbestos-free

**Fire resistance:** non-combustible

**Water Absorption:**  $\leq 40\%$

**Resistant Bending Strength:**  $\leq 10.5 \text{ MPa dry}$

**Moisture Movement:** 0.25 %

**Freeze Thaw:** No distortion after 25 repeated cycles of freezing and thawing

