



## OWNER MANUAL

### BR-303C

#### Features:


- \*Car specific 2-way component speaker system
- \*4" Midwoofer with paper-fibre cone and rubber surround
- \*1" copper voice coil / BIMAX® spider
- \*1" Aluminum dome tweeter
- \*Car specific mid pass & high pass filter included
- \*Klippel® optimized
- \*Suitable for BMW\*

\***BMW is a registered trademark of Bayerische Motoren Werke AG**

\* **May be incompatible with molds of some older model years. Please confirm whether it is compatible with your vehicle before purchasing.**



BR-303C	2-way Component System	
Impedance	4 Ohm	
Frequency response	123-20kHz	
Efficiency 1W/1M	88dB	
Power Handling(RMS)	60W	
Power Handling(max)	120W	
Crossover Frequency	3500 Hz(12/oct)	
Linear Parameters(TSP)	BR-303C-MID	BR-303C-TW
Membrane Material	Paper	Aluminum
Voice Coil Diameter	1"	1"
Resistance(Re)	3.6 Ohm	3.2 Ohm
Resonance Frequency(Fs)	123 Hz	1750 Hz
Mechanical Q factor(Qms)	4.74	
Electrical Q factor(Qes)	0.92	
Total Q factor(Qts)	0.77	
Equivalent air volume Vas	1.2L	
Mechanical mass(Mms)	5.5 g	

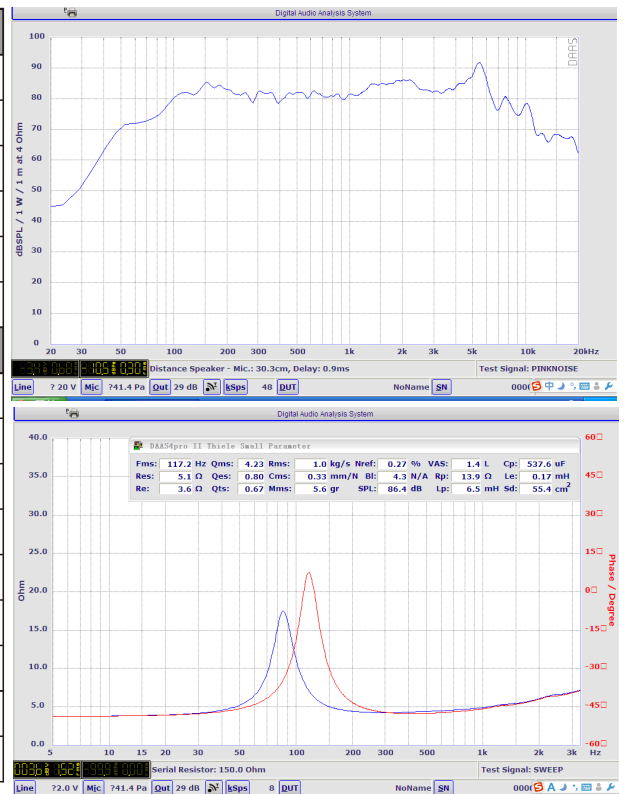



# OWNER MANUAL

## BR-303C

### Physical Dimensions:

