


MAC FAUCETS

The Widest Selection of Decorative Automatic Faucets

Autoluxe Faucets are Available in Twenty Finishes

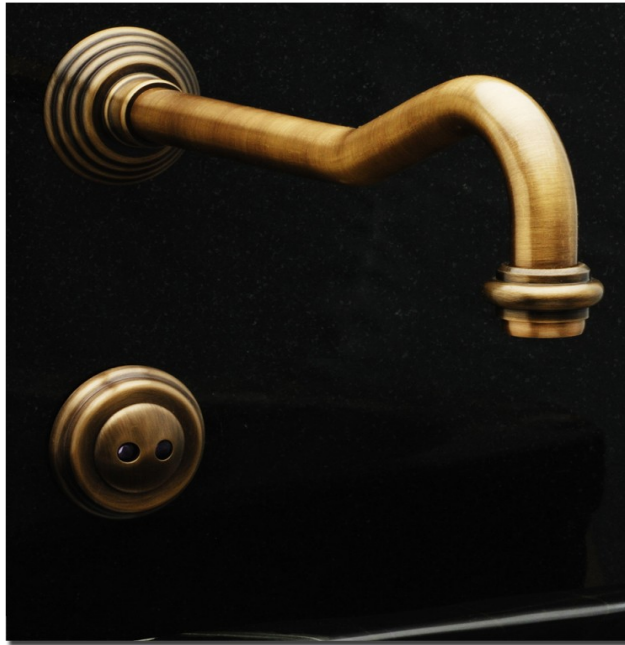

Autoluxe™ Model: FA43-129

Featuring:

- **Brass Faucet.**
- **Solid Brass Valving System.**
- **Water Safe Control Electronics.**
- **Battery Powered, (4 Standard AA Batteries).**
- **Water Flow Adjustment Capability.**
- **Available in Twenty (20) Finishes.**

Package Includes

Faucet

FA43 Automator

*Single Water Source
Fitting*

*Water Flow Valve
With Built-in Particle
Filter*

Stainless Steel Hose

Mounting Hardware

Batteries Pre-installed

*All the hardware necessary for
satisfactory installation*

Drain Sold Separately

ANSI A112.18.1M

CSA Standard B125, 2.2
U.S. GPM

Complies with NSF
Standard 61, Section 9



The model FA43-129 is member of an expanding line of **wall mounted hands free faucets** available from MAC. This faucet is ideal for bathroom applications where *traditional design* wall mounted automatic faucets are desired. *Don't let the good looks fool you, the model FA43-129 is a heavy duty faucet that is designed for heavy traffic applications.* It features the Faucet Automator model FA43. Manufactured to last, the FA43 employs the latest in plug and play digital electronics, and is equipped with a solid brass solenoid valve with integral filter and water flow adjustment. The faucet is shipped complete and is packaged for ease of installation.

MAC Faucets is first to design and manufacture decorative automatic wall mount faucets world wide.


SPECIFICATIONS AND DIMENSIONS

| | |
|---------------------------|--|
| MODEL: | FA43-129 |
| SPOUT: | SOLID BRASS |
| POWER: | 4 (AA) BATTERIES / AC ADAPTER OPTIONAL |
| BATTERY LIFE EXPECTANCY: | 300,000 CYCLES |
| SOLENOID VALVE: | 6 VOLT MAGNET LATCHING. |
| WORKING WATER PRESSURE: | 1 PSI -100 PSI |
| SUPPLY INLET SIZE: | 1/2" NPT MALE |
| WATER MIXING VALVE: | OPTIONAL |
| POP-UP DRAIN KNOB: | NONE |
| SENSOR TYPE AND LOCATION: | ACTIVE INFRARED, WALL MOUNT |
| SENSOR MICROPROCESSOR: | DIGITAL, PUG AND PLAY |
| SENSING RANGE: | 2" TO 10" ADJUSTABLE |
| RESPONSE TIME: | 0.3 SECOND |
| SHUT-OFF DELAY TIME: | 2 SECONDS |
| MAXIMUM RUNNING TIME: | 60 SECONDS |
| PARTICLE FILTER SIZE: | 50 MESH |
| AERATOR: | 1.5 GPM STANDARD, OPTIONS AVAILABLE |

Optional Equipment:

- Lavatory Drain, Grid and Pop-Up Type. • Wall Plates for 4" and 8" hole configuration.
- Adjustable Under The Sink Mixing. • AC Adapters.

All Dimensions are approximate and in Inches

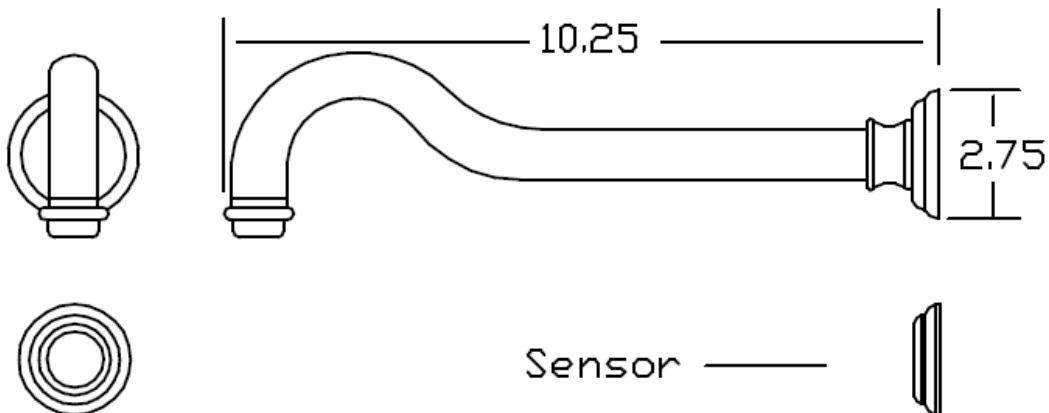

MAC FAUCETS

www.macfaucets.com Tel 866 558 3200 Fax 310 919 3073 Email Info@macfaucets.com