
KEY LARGO STAINLESS STEEL IN POOL LADDER W/RESIN STEPS

MODEL AC 71498




MODEL AC 71501



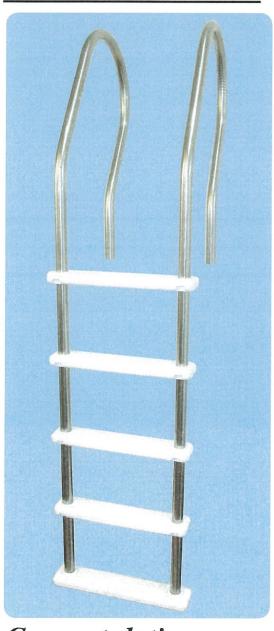


Congratulations on purchasing The Key Largo or Tahitian Stainless Steel In Pool Ladder

KEY LARGO STAINLESS STEEL LADDER PARTS

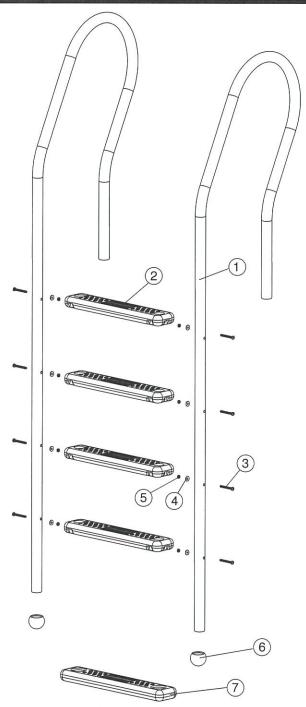


PART #	MODEL #	DESCRIPTION	QTY
1	AC 73008	Reverse Bend Stainless Steel Handrail	2
2	BS MIDSTEP	Steps	4
3	BS 698HDWRE	Hardware Bag	1
4	BS 698HDWRE	Hardware Bag	1
5	BS 698HDWRE	Hardware Bag	1
6	BS STPBALL	Pivot Ball	1
7	BS BOTSEP	Bottom Step	1

TAHITIAN REVERSE BEND SS/LADDER PARTS

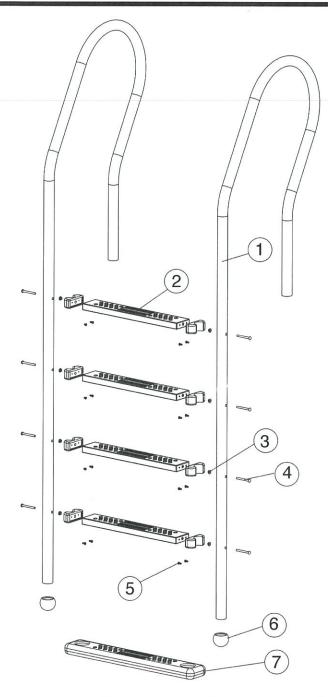

PART #	MODEL #	DESCRIPTION	QTY
1	AC 73008	Reverse Bend Stainless Steel Handrail	2
2	AC 22411	Stainless Steel Steps	4
3	AC 22268HDW	Hardware Bag	1
4	AC 22268HDW	Hardware Bag	1
5	AC 22268HDW	Hardware Bag	1
6	BS STPBALL	Pivot Ball	1
7	AC 22438	Bottom Step	1


STEP 1




- Slide one of the four ladder steps(BS MIDSTEP) onto one of the stainless steel handrails (BS SSRAIL). Make sure that the step treads are facing up. (See figure 1)
- If you have any difficulty sliding the step onto the post, apply a small amount of lubricant to the posts.

STEP 2

- Slide the second handrail thru the hole on the opposite side of the step.
- Align the holes in the step with the top set of holes on the handrail.
- Secure step to handrail with a bolt and nut out of hardware bag (BS 698HDWR).
 Make sure that the head of the bolt is located on the outside of the step. (See figure 2)




STEP 3



 Slide the remaining 3 steps onto the handrails and secure them with nuts and bolts. (See figure 3)


STEP 4




- Slide the pivot balls (BS STPBALL) onto the bottom of each handrail as shown in figure 4.
- Make sure both pivot balls are securely fastened to each handrail.

STEP 5

- Place the bottom step(BS BOTSTEP) on the floor facing up. Hold the ladder assembly straight up and align the pivot balls with the receivers on the bottom step.
- Push down firmly until both balls are inserted into the step. See figure 5.



STEP 6

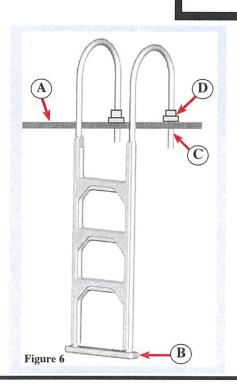

- Place ladder in your desired position on deck (A).
 Swivel step if needed to align with pool floor.
 Make sure the base step rests flat against the pool floor. (B)
- Mark the location of the handrails on the deck with a pencil. Using a 1 ½" hole saw, drill one hole for each hand rail through the deck surface. (C) This will ensure that the deck will now support the ladder.
- Secure hand rails to the deck using deck flanges (D). (FLANGES ARE SOLD SEPERATELY)
- Slide the flanges over each handrail. Insert the handrails through the holes in the deck. Secure the flanges to the deck with screws. Secure the flange to the handrail by tightening down the screw in the flange.

LADDER MATS

• The use of a ladder mat is strongly recommended with any pool ladder. Ladder mats prevent your pool liner from being damaged by slight movements of your pool ladder.




HOW TO INSTALL YOUR LADDER MAT

- 1. Remove ladder mat from packaging
- 2. Place ladder mat onto the bottom of the pool with the smooth side facing down towards the liner
- 3. Place fully assembled ladder on top of the ladder mat. Make sure the ladder is centered on the ladder mat
- 4. Properly secure ladder to your pool


LADDER MATS ARE SOLD SEPARATELY FOR YOUR POOL LADDER

LADDER FLANGES

• Ladder Flanges are used to secure your ladder to your deck.

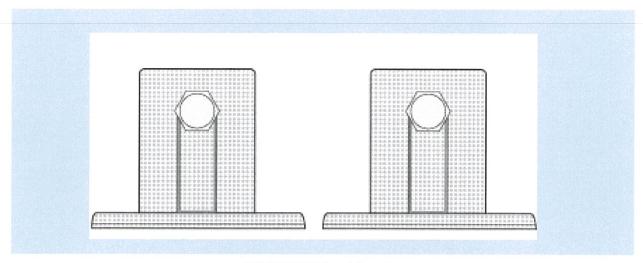

- BS 55689 Blue Metal
- BS 55697 Silver Metal
- BS 35971 White Metal

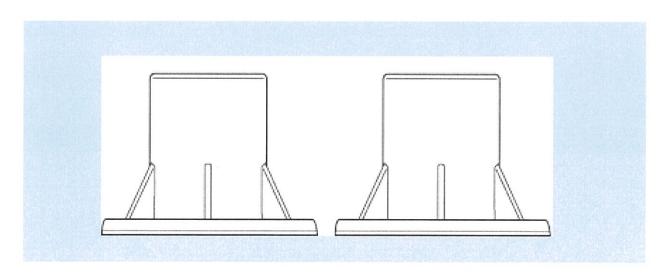

• BS 35998 Plastic

FLANGES ARE SOLD SEPARATELY

DANGER

WARNING

To prevent
Entrapment or
Drowning,
DO NOT SWIM
through, behind
or around the
ladder

DANGER

SAFETY NOTICE IMPORTANT

PLEASE READ BEFORE USING THIS LADDER

WARNING

This ladder is designed and manufactured for Aboveground, Semi-Inground Flat Bottom Pools

48", 52" and 54" in wall height and pool decks 48", 52" and 54" in height

WARNING